

Zeitschrift: Helvetica Physica Acta
Band: 30 (1957)
Heft: I

Artikel: A note on electromagnetic flowmeters of rectangular cross-section
Autor: Holdaway, H.W.
DOI: <https://doi.org/10.5169/seals-112805>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 05.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

A Note on Electromagnetic Flowmeters of Rectangular Cross-Section

by H. W. Holdaway

(N. S. W. University of Technology, Sydney, Australia.)

(13. IX. 1956.)

Summary. This paper is intended to supplement that of THÜRLEMANN [H.P.A. 28, 483 (1955)]. It is demonstrated that, for two-dimensional flow distributions in a conduit subject to a uniform transverse magnetic field, the e. m. f. generated between two opposite conducting faces of the rectangular cross-section is proportional to the true average velocity of flow, *irrespective of the nature of the two dimensional distribution*. The form of analysis employed permits an examination also of the effect of internal resistance of the unit when connected to an external measuring circuit.

The most obvious advantage of a rectangular cross-section for an electromagnetic flowmeter is that the geometry is well adapted to use with practical magnet structures, and that within certain limits it permits a reduction in the spacing of pole faces and an increase in electrode spacing, resulting in somewhat higher induced e.m.f.'s for a given cross-sectional area and mean velocity of flow.

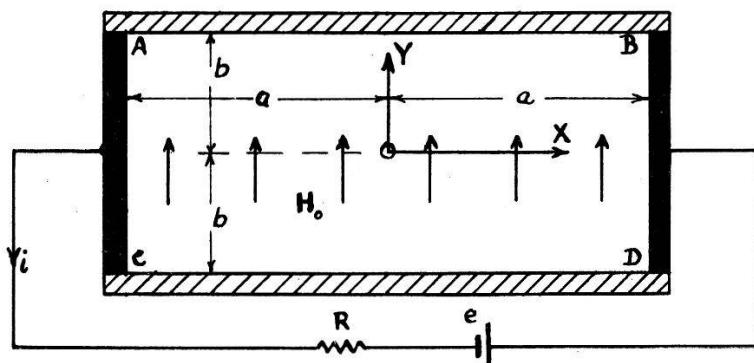


Fig. 1.
Flowmeter Cross-Section (Schematic).

However, as the following analysis shows, the rectangular cross-section leads to an induced e.m.f. which is proportional to the true mean velocity of flow (or total discharge) in the case of an established flow regime in a uniform magnetic field.

It is assumed that the magnetic field \bar{H}_0 is uniform and in vector notation is equal to $H_0 \hat{j}$, where \hat{j} is the unit vector parallel to the Y axis. The fluid velocity \bar{v} may be distributed in any arbitrary manner over the cross-section, but is assumed to be parallel to the Z axis and can be written $\bar{v} = v \hat{k}$, where \hat{k} is a unit vector upwards in Fig. 1 and V is independent of Z . Two opposite sides of the cross-section are conducting and two insulating, as shown in Fig. 1.

The equations applicable to steady state conditions are (in electromagnetic units)

$$\nabla^2 U = \bar{H}_0 \cdot \operatorname{curl} \bar{v} = -H_0 \frac{\partial v}{\partial x} \quad (1)$$

whilst at the boundaries of the cross-section the current density is

$$\bar{J} = \sigma \bar{E} = -\sigma \nabla U. \quad (2)$$

(Here \bar{E} is electric intensity, U the electric potential, σ the specific conductivity of the fluid, all in electromagnetic units.)

Therefore the current leaving the fluid at a conducting face is, per unit length of flowmeter,

$$\int \bar{J} \cdot \bar{n} ds = -\sigma \int \frac{\partial U}{\partial n} ds \quad (3)$$

where ds is an element of the perimeter of the cross-section. Thus if l is the length of the measuring section of the flowmeter and i the external current,

$$\int \frac{\partial U}{\partial n} ds = \pm \frac{i}{l\sigma} \quad (4)$$

at a conducting face.

We now apply the 2-dimensional Green's Theorem

$$\int V \frac{\partial U}{\partial n} ds - \int U \frac{\partial V}{\partial n} ds = \iint (V \nabla^2 U - U \nabla^2 V) dx dy \quad (5)$$

and chose $V = x$, so that $\nabla^2 V$ vanishes identically. On the surface AC of Fig. 1.

$$\frac{\partial V}{\partial n} = -\frac{\partial V}{\partial x} = -1, \quad V = -a, \quad U = U_A. \quad (6)$$

On the surface BD

$$\frac{\partial V}{\partial n} = \frac{\partial V}{\partial x} = 1, \quad V = a, \quad U = U_B. \quad (7)$$

On surfaces AB and CD

$$\frac{\partial V}{\partial n} = 0, \quad \frac{\partial U}{\partial n} = 0. \quad (8)$$

Substituting from equations (1), (6), (7) and (8) into equation (5) we obtain

$$\begin{aligned} - \int_{AB} a \frac{\partial U}{\partial n ds} + \int_{BD} a \frac{\partial U}{\partial n ds} + 2 b (U_A - U_B) &= - H_0 \iint x \frac{\partial v}{\partial x} dx dy \\ &= + H_0 \iint v dx dy. \end{aligned} \quad (9)$$

The integral on the right hand side of equation (9) takes the form shown since $v = 0$ at all boundary surfaces. It can be expressed as

$$H_0 \iint v dx dy = H_0 v_m A = H_0 Q \quad (10)$$

where $A = 4ab$ is the cross-sectional area of the flowmeter, v_m is the true mean velocity and $Q = v_m A$ is the total flow or discharge.

For zero external current, equations (9) and (10) lead to the result

$$U_A - U_B = \frac{H_0 Q}{2b} = 2a H_0 v_m \quad (11)$$

and thus the potential difference is equal to that induced in a conductor of length equal to the electrode spacing, travelling across the field at the true mean velocity of the fluid.

If there is an external current i (we temporarily generalise by including an external battery of e. m. f. „e“) and the series resistance is R , then

$$i = \frac{U_A - U_B + e}{R}. \quad (12)$$

On substituting from equation (4) into equation (9), the latter now reduces to

$$\left(\frac{ai}{l\sigma} + \frac{ai}{l\sigma} \right) + 2b(U_A - U_B) = H_0 Q \quad (13)$$

Combining equations (12) and (13) there results

$$(U_A - U_B) \left(1 + \frac{a}{Rb l\sigma} \right) + \frac{ea}{Rb l\sigma} = \frac{H_0 Q}{2b}. \quad (14)$$

Putting either $Q = 0$ or $H_0 = 0$ it is easily shown that the effective internal resistance of the flowmeter is

$$R_e = \frac{a}{bl\sigma}. \quad (15)$$

Thus finally after putting $e = 0$

$$U_A - U_B = \frac{H_0 Q}{2b} \left(\frac{R}{R + R_e} \right) = 2a H_0 v_m \left(\frac{R}{R + R_e} \right). \quad (16)$$

Equation (16) reduces to equation (11) when $R \gg R_e$. Equations (15) and (16) indicate the desirable magnitude of external resistance, or equation (13) the limiting magnitude of current for any desired degree of approximation to the ideal equation (11). In practice the maximum current may be restricted by other factors not considered here, such as current density limits needed to minimise polarisation effects or to ensure a close approach to ideal behaviour with reversible electrode systems.
