

Zeitschrift: Technische Mitteilungen / Schweizerische Post-, Telefon- und Telegrafienbetriebe = Bulletin technique / Entreprise des postes, téléphones et télégraphes suisses = Bollettino tecnico / Azienda delle poste, dei telefoni e dei telegrafi svizzeri

Herausgeber: Schweizerische Post-, Telefon- und Telegrafienbetriebe

Band: 71 (1993)

Heft: 4

Artikel: Interfaces in broadband ISDN

Autor: Rao, Sathyanarayana

DOI: <https://doi.org/10.5169/seals-875496>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 30.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Interfaces in Broadband ISDN*

Sathyanarayana RAO, Berne

1 Introduction

Two sets of interfaces are defined in B-ISDN standards; one referring to *user-network interface (UNI)* at reference points T_B and the other at internodal junction points. This latter interface is referred to as *network-node interface (NNI)*.

UNI at reference point T_B defines the boundary between public network and customer premises network (CPN), whereas the interface at S_B is generally known as the terminal interface. The interface at S_B is expected to have a high degree of commonality with the interface at T_B . However, the interface standards at S_B are not yet much advanced. In this paper UNI refers to the interface at T_B . For UNI two hierarchical levels are recommended: the basic rate interface with a gross bit rate of 155.52 Mbit/s and the primary rate interface with a gross bit rate of 622.08 Mbit/s to support a varying mixture of services for broadband users. For each of these interfaces, two options are chosen: a cell-based physical layer and a physical layer based on synchronous digital hierarchy (SDH). UNI specifications are described in the I.413 and I.432 recommendations of CCITT [21]. The NNI is considered as a part of the transmission system in the core network. For NNI three hierarchical levels based on SDH are defined to support various levels of transmission capacities of nodes in the main network. The NNI aspects are covered in the accompanying paper.

The standard interfaces are very important for subsystem development, so that multivendors and multimanufacturers can choose and develop the equipments that are more appropriate to their technical expertise. The service support and the functional support are definable at interface levels, and various configurations can be realized through proper adapters between different interfaces. Such a flexibility will provide the user with a large spectrum of choice for physical implementations to suit his needs for cost-performance advantages. In this perspective, CCITT and ETSI standards organizations have defined the user network interface at T_B reference point for user service support and the network node interface (NNI) at nodal junctions, for an optimized and flexible transmission system.

2 Reference Configuration

Figure 1 shows the reference configuration with various reference points and interfaces identified for standardization. Though the reference configuration of B-ISDN is identical to that of 64-kbit/s ISDN, physical configurations of CPN may vary in B-ISDN considerably to accommodate various networking topologies like Bus or Ring corresponding to shared media and star, etc. The internal interfaces of such topologies are not standardized, so that vendors can configure the customer's CPN in different ways, but guarantee the standard interfaces through appropriate media adapters (MA). The reference point T_B defines the boundary with the public network. The user terminal and the network are separated by the broadband network termination (NT), divided into NT2 and NT1, the transmission medium (optical fibre or coaxial cable) and the line termination (LT), which is located within the local exchange (LEX). The NT2 has multiplexing, concentrating or switching function, supporting multiple terminals or users. The connection to NT2 will be through standard interface at S_B reference point. NT1 terminates the physical medium and incorporates operations, administration and maintenance (OAM) of the public network up to reference point T_B . The NT2 can have a null function, if only one broadband terminal is connected. In this case interfaces at S_B and T_B should be the same for terminal compatibility. However, the interface at S_B is not yet well-defined.

The transmission links between two nodes are achieved through standard network node interfaces (NNI). Whenever the compatibility differs between the network node interfaces, the interworking unit between the two interfaces is introduced.

3 User Network Interface at T_B Reference Point

The gross bit rates of 155.52 Mbit/s and 622.080 Mbit/s have been adopted at basic and primary levels to transport ATM cells in the access network at the physical layer, which corresponds to the transmission capacities of the SDH. Two options have been recommended for these interfaces: SDH-based and cell-based physical layers. Both options may also exist at S_B reference point.

Use of plesiochronous digital hierarchy (PDH) physical layer at UNI for ATM cells transport has also been considered for low bit rates (<140 Mbit/s) but has not been elaborated in the approved recommendations.

* Abbreviations, glossary and references see page 238.

Table 1. UNI and NNI characteristics

Parameter	UNI characteristics	NNI characteristics
Bit rates	155.52 Mb/s and 622.08 Mb/s	$n \times 155.52$ Mb/s; $n = 1, 4,$ and 16
Broadband Application	User service support	maximum flexibility in transport network
physical layer	two options: SDH based and Cell based	Only SDH option
VPI/VCI	24 bits	28 bits
GFC	4 bits: for traffic control from user to network direction and for possible point-to-multipoint applications (still open)	No GFC field: No traffic flow control and no point-multipoint configurations.
Symmetry	UNI 155.52 Mb/s is symmetric, but the 622.08 Mb/s can be asymmetric (622.08 Mb/s from network to user, 155.52 Mb/s from the user to network: still open)	Normally asymmetric
UPC/NPC	UPC monitors and controls the traffic in terms of traffic offered and validity of the ATM connections	NPC monitors and controls the traffic in terms of traffic offered and validity of the ATM connections
Meta-signalling	Meta-signalling is used to establish, check and release the point-to-point and selective broadcast signalling channel connections.	No Meta-signalling is used
Signalling	Both point-to-point and point-to-multipoint signalling configurations may be used	Only point-to-point signalling configuration is used

compatibility. The media adaptors are used to accommodate the specific topology for the distributed B-NT2. The interface at W may include topology-dependent ele-

ments, and it may be a nonstandardized proprietary interface.

In all configurations, there would be only one UNI at T_B reference point per NT1, whereas there can be more than one interface at S_B reference point per NT2.

The high degree of commonality between interfaces at S_B and T_B is desired, so that a terminal can be directly connected to NT1 at T_B reference point. In this case the B-NT2 may have a null function. However, the interface at S_B is not fully developed. In the standards so far, only point-to-point configurations at the physical layer have been defined. The point-to-multipoint configurations may be there at higher layers. When a shared medium is used, B-TE includes shared-medium access functions (fig. 3c: SSB interface). However, the connection of B-TE to NT2 will be across standard S_B interfaces.

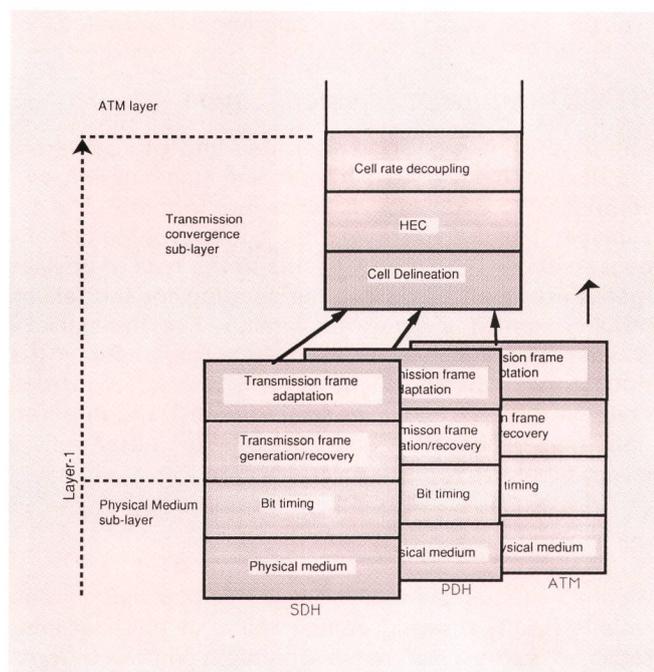


Fig. 2 Protocol reference model of UNI - physical structure

7 Conclusions

The interfaces for B-ISDN have been conceived with a view of commonality between UNI and NNI. The UNI standards are defined with a view of the user service support needs, whereas the NNI is defined in terms of maximum flexibility for network configuration enabling transmission, multiplexing and cross-connecting of various signals. The acceptance of worldwide universal interfaces for UNI and NNI standards provides an easy evolution path, flexibility in network configuration, sim-

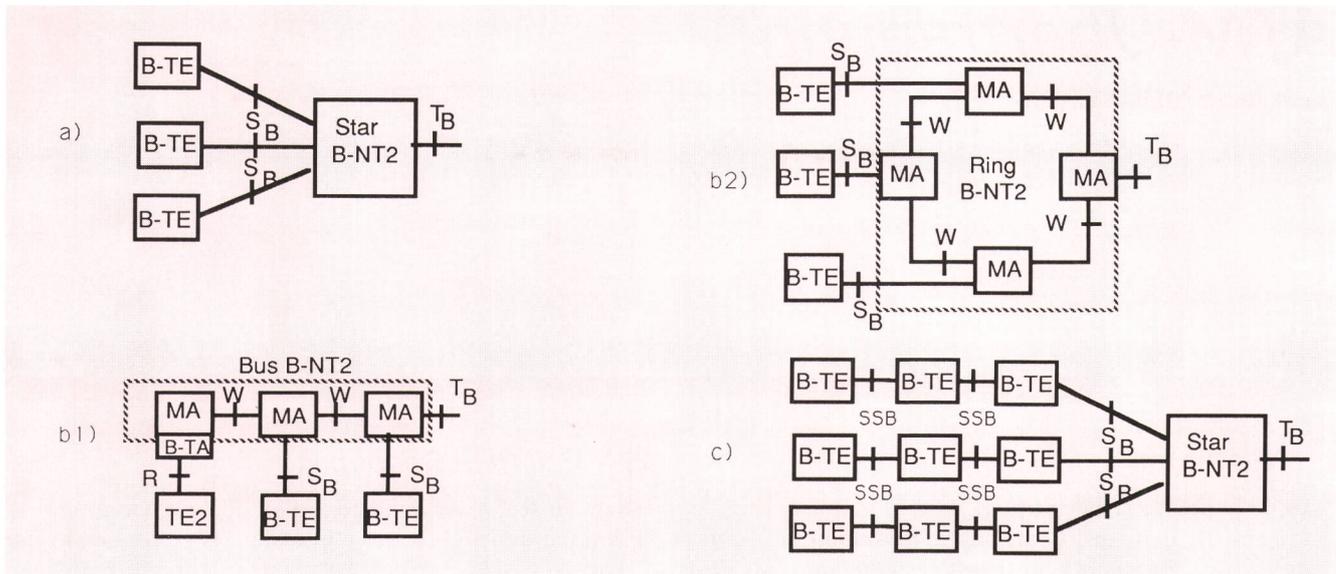


Fig. 3 Examples of physical configurations

ple interworking with existing interfaces and early realization of B-ISDN. The commonality achieved between UNI and NNI as well as the independence of the physi-

cal layer from higher layers result in multiple types of transmission systems that are optimally designed for the user needs without much penalty on the network design.

Zusammenfassung

Schnittstellen im Breitband-ISDN

In diesem Beitrag werden die Schnittstellen im Breitband-ISDN, wie sie in den CCITT- und ETSI-Normen definiert sind, vorgestellt. Anhand der Referenzkonfiguration wird die Bedeutung der funktionellen Gruppeneinteilung und der Schnittstellendefinitionen erklärt. Die Eigenschaften zweier Typen von Benutzer-Netz-Schnittstellen (UNI) – eine auf Rahmen der synchronen digitalen Hierarchie SDH und die andere auf einer reinen Zellenfolge beruhend – werden erläutert. Auch die Anwendung der plesiochronen digitalen Hierarchie PDH an der Benutzer-Netz-Schnittstelle wird erwähnt. Die wichtigen Unterschiede der an der UNI-Schnittstelle und an der Netzknoten-Schnittstelle (NNI) beteiligten Funktionen werden gezeigt. Struktur und Funktionen der physischen Schicht werden ebenfalls kurz behandelt. Als ausführbare Szenarien werden einige physische Konfigurationen mit verschiedenen internen Schnittstellen-Referenzpunkten dargestellt.

Résumé

Interfaces dans le RNIS à large bande

L'auteur décrit les interfaces propres au RNIS à large bande définies dans les normes du CCITT et de l'ETSI. En se fondant sur la configuration de référence, il explique la signification de la répartition fonctionnelle des groupes et des définitions des interfaces. Il aborde les caractéristiques de deux types d'interface utilisateur-réseau (UNI), l'une se fondant sur des trames de la hiérarchie numérique synchrone SDH et l'autre sur une pure succession de cellules. On évoque l'application de la hiérarchie numérique plésiochrone (PDH) à l'interface usager-réseau. Les principales différences entre les fonctions apparaissant à l'interface UNI et celles qui sont rattachées à l'interface des nœuds de réseau (NNI) sont démontrées. La structure et les fonctions de la couche physique sont esquissées. On montre quelques configurations physiques présentant divers points de référence d'interface internes.

Riassunto

Interfacce nella rete ISDN a larga banda

In questo articolo l'autore presenta le interfacce nella rete ISDN a larga banda come sono definite nelle norme CCITT e ETSI. In base alla configurazione di riferimento egli spiega l'importanza della suddivisione funzionale in gruppi e delle definizioni delle interfacce. Illustra quindi le caratteristiche di due tipi di interfacce rete/utente (UNI): una basata su trame della gerarchia sincrona digitale SDH e l'altra su una pura successione di celle. L'autore menziona poi l'applicazione della gerarchia digitale plésiochrone PDH all'interfaccia rete/utente. Indica quindi le differenze importanti delle funzioni interessate dell'interfaccia UNI e dell'interfaccia dei nodi della rete (NNI) e parla brevemente della struttura e delle funzioni dello strato fisico. Presenta infine, come scenari realizzabili, alcune configurazioni fisiche con diversi punti di riferimento interni delle interfacce.

Summary

Interfaces in Broadband-ISDN

This paper identifies the Broadband ISDN (B-ISDN) interfaces as defined in CCITT and ETSI standards. The reference configuration is used to explain the significance of functional groupings and interface definitions. The characteristics of two types of User-Network Interfaces (UNI), one based on Synchronous Digital Hierarchy (SDH) frame and the other on the pure cell stream are outlined. Use of the plésiochronous digital hierarchy (PDH) at UNI is also considered. The important differences in the functions involved at UNI and at the Network Node Interface (NNI) are given. The physical layer structure and functionalities involved are also briefly discussed. Some physical configurations as implementable scenarios with different internal interface reference points are also cited.