

# **Behavior of concrete-filled square steel columns**

Autor(en): **Konno, Kazuchika / Kei, Takahiro / Nagashima, T.**

Objekttyp: **Article**

Zeitschrift: **IABSE reports = Rapports AIPC = IVBH Berichte**

Band (Jahr): **60 (1990)**

PDF erstellt am: **08.05.2024**

Persistenter Link: <https://doi.org/10.5169/seals-46484>

## **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

## **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

Ein Dienst der *ETH-Bibliothek*

ETH Zürich, Rämistrasse 101, 8092 Zürich, Schweiz, [www.library.ethz.ch](http://www.library.ethz.ch)

<http://www.e-periodica.ch>

## Behavior of Concrete-Filled Square Steel Columns

Comportement de piliers creux carrés remplis de béton

Verhalten von beton gefüllten Stahlhohlstützen

**Kazuchika KONNO**

NKK Corporation  
Kawasaki, Japan

**Takahiro KEI**

Takenaka Kumuten  
Tokyo, Japan

**T. NAGASHIMA**

Takenaka Kumuten  
Tokyo, Japan

### SUMMARY

The authors accomplished some experiments on the concrete filled square steel columns subjected to combined axial compression and bending moment. The confining effect between the steel tube and the core concrete, which increases the ultimate strength and ductility of the member, is widely admitted in case of the circular sections. The authors recognized the same effect even in the square sections, and propose a design formula which considers both the local buckling of the square tube and the increase of the concrete strength.


### 1. OUTLINE OF THE EXPERIMENT

The experimental set up is shown in Fig.1. Both ends of the specimens were simply supported and the alternative transverse force was added at the center of the span. Each specimen was also subjected to the constant axial force all through the experiment. The experimental parameters are tabulated in Table 1.

An example of the load-deflection curve is shown in Fig.2. The ultimate strength of the specimens were closely related to the local buckling of the face plate of the steel tube, and it usually occurred prior to the strain hardening region of the steel. However, the ultimate strength of all specimens exceeded the value of the generalized superposed strength (see Table 1), and the specimens had considerable energy absorption capacity even in the range of the large width-to-thickness ratio of the tube and the large axial force.

### 2. ESTIMATION OF THE LOAD BEARING CAPACITY

The strength of the composite member can be estimated by the generalized superposed strength theory. The authors propose to

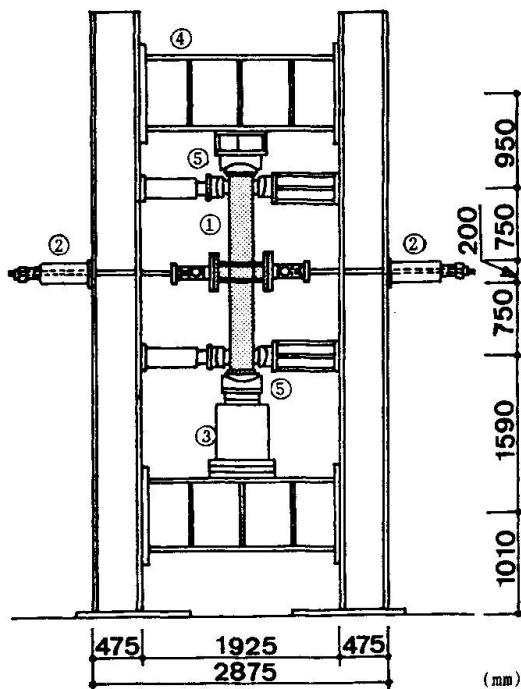

- ① specimen
- ② hydraulic jack for the transverse force
- ③ hydraulic jack for the axial force
- ④ loading frame
- ⑤ pin-roller support

Fig.1 Experimental set up



estimate the strength of the steel part and the concrete part as follows;  
- steel part : To consider the effect of the local buckling, the effective width proposed by Foulkner[1] is used. The effective width is estimated by considering the post-buckling strength of the plate with clamped boundaries. It is given by  
 $be = b \cdot (2.5/\beta - 1.56/\beta^2)$ ,  $\beta = b/t\sqrt{\sigma_y/E}$  (1)

where  $be$  is the effective width,  $b$  and  $t$  are the width and thickness of the steel tube,  $\sigma_y$  and  $E$  are the yield point and Young's modulus of the steel.

- concrete part : The confined effect is taken into account by using the following equation.

$$c\sigma_B = c\sigma_{B0} \{1 + k(t/b)^2 \sigma_y/c\sigma_{B0}\} \quad (2)$$

where  $c\sigma_B$  is the compressive strength of confined concrete,  $c\sigma_{B0}$  is that of plane concrete. The coefficient  $k$  is decided by compression experiments[2] as  $k=48.8$ . The generalized superposed strength of the specimens estimated by this method are tabulated in Table 1 (Calculation 2). Comparing with the normal generalized superposed strength (Calculation 1), it shows better agreement with the experimental values.

### 3. CONCLUSION

The confining effect can be considered in the concrete filled square steel tubes. By using the proposed estimation method, the ultimate strength of the section can be estimated in safety side.

### REFERENCES

1. D.Faulkner, A Review of Effective Plating for Use in the Analysis of Stiffened Plating in Bending and Compression., Journal of Ship Research, Vol.19, No.1, Mar.1975.
2. Matsumura H. et al, Compressive Strength of Filled Concrete in Square Steel Pipe., Annual Meeting Report of AIJ, October, 1989.

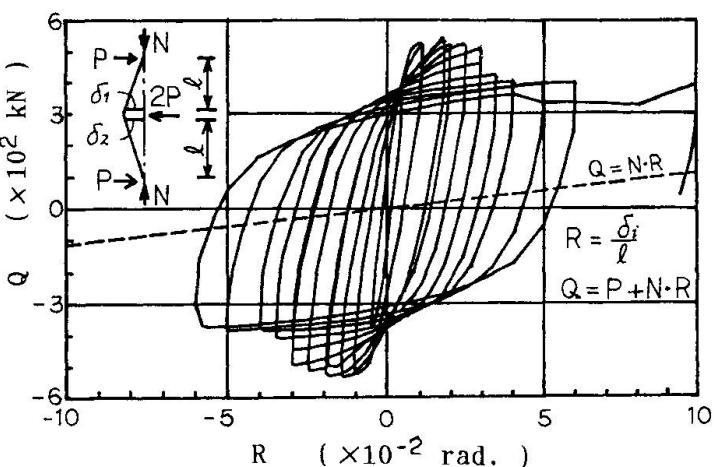


Fig. 2 Load-deflection curve of R08M3

Table 1 Experimental parameters and ultimate strength of the specimens

Name of Specimen	Experimental Parameters						Ultimate Strength by		
	Square Steel Tube			Filled Concrete		Ratio of the Axial Force *1	Experiment (kN·m)	Calculation 1 *2 (kN·m)	Calculation 2 *3 (kN·m)
	Width B (mm)	Thickness t (B/t) (mm)	Yield Point (N/mm²)	Tensile Strength (N/mm²)	Compressive Strength (N/mm²)				
R04L3	4.52(55)	357.9	500.1	30.2	23.83	0.3	228.5	198.4	189.7
R06L5	5.76(43)	371.7	543.3	30.2	23.83	0.5	243.2	210.0	228.5
R08L5	7.65(33)	358.9	540.3	30.2	23.83	0.5	275.6	244.8	299.0
R12L5	11.89(21)	316.8	509.0	30.2	23.83	0.5	432.5	298.9	399.7
R04M3	4.52(55)	357.9	500.1	38.0	34.81	0.3	287.3	212.6	203.7
R06M3	5.76(43)	371.7	543.3	38.0	33.83	0.3	347.2	255.0	260.7
R06M5	5.76(43)	371.7	543.3	38.0	34.81	0.5	349.1	226.6	243.4
R08M3	7.65(33)	358.9	540.3	37.0	33.24	0.3	400.1	297.5	325.7
R08M5	7.65(33)	358.9	540.3	38.0	33.83	0.5	413.8	257.5	309.9
R08M7	7.65(33)	358.9	540.3	37.0	33.24	0.7	365.8	178.6	260.9
R12M5	11.89(21)	316.8	509.0	38.0	34.81	0.5	560.0	315.5	411.8
R12M7	11.89(21)	316.8	509.0	38.0	34.81	0.7	451.1	215.5	367.0
R12M3H	11.61(22)	477.6	583.5	38.2	34.81	0.3	716.9	508.6	595.1
R12M5H	11.61(22)	477.6	583.5	38.2	34.81	0.5	634.5	427.3	578.3
R12M7H	11.61(22)	477.6	583.5	38.2	34.81	0.7	577.6	285.5	515.6
R06H5	5.76(43)	371.7	543.3	84.9	43.84	0.5	344.2	317.4	329.0
R08H5	7.65(33)	358.9	540.3	84.9	43.84	0.5	384.4	352.4	393.3
R12H5	11.89(21)	316.8	509.0	84.9	43.84	0.5	490.0	401.9	482.1
R12H7	11.89(21)	316.8	509.0	84.9	43.84	0.7	361.9	291.9	425.4

\*1  $N/N_0$  where  $N$  is imposed axial force and  $N_0$  is axial yield strength of the composite section

\*2 generalized superposed strength by using  $\sigma_y$  and  $c\sigma_B$     \*3 generalized superposed strength by proposed method