

Combined frame-strut earthquake resistant bridge

Autor(en): **Mitrofanov, Ju.M. / Popov, O.A.**

Objekttyp: **Article**

Zeitschrift: **IABSE reports = Rapports AIPC = IVBH Berichte**

Band (Jahr): **64 (1991)**

PDF erstellt am: **28.05.2024**

Persistenter Link: <https://doi.org/10.5169/seals-49300>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

Ein Dienst der *ETH-Bibliothek*

ETH Zürich, Rämistrasse 101, 8092 Zürich, Schweiz, www.library.ethz.ch



Combined Frame-Strut Earthquake Resistant Bridge

Pont mixte triangulé résistant aux séismes

Erdbebensichere Rahmen-Sprengwerk-Brücke

Ju. M. MITROFANOV

Professor
Moscow, USSR

O.A. POPOV

Civil Engineer
Giprotransmost
Moscow, USSR

I. INTRODUCTION

One of the most complicated problems of the transport construction is erection of viaducts across deep mountain canyons and workings.

The considered design-technological solution under the conditions of hard accessibility regions was directed toward reduction of terms required for erection of the above transport structures, and ensures their high reliability in the course of operation.

The bridge superstructure features:

- a through system of cross-bar and bearing struts allowing passage of railway and motor transport at various levels, excluding in this case erection of high piers;
- engagement of the automatic passage orthotropic plate in a combined operation with elements of main girders;
- method of "downward" strut erection with closing the cross-bar in the middle of the central span.

2. BRIDGE ACROSS THE RAZDAN RIVER (ARMENIA)

Built in 1981, the bridge incorporates a frame-strut steel superstructure and reinforced concrete scaffold parts.

The crossed 250 m wide and 110 m deep canyon featuring steep vertical slopes. The area seismicity is of 9 number force.

The welded superstructure (Fig.1) uses high strength bolts for erection joints. The structure material - steels 10XCHD, 12 XTYAM of grade C-40, 15 XCHD (C-35), 16D (C-23). The total mass of metal is 3276 t.

The factory made metal structures were manufactured with the use of standard equipment and attachments for standard railway superstructures.

The developed erection method is universal for any climatic conditions.

The bridge rational parameters, the cross-bar strut lattice superstructure, application of plastic material, stability against brittle destruction, despite existing considerable overloads and oscillations made it possible to reliably ensure intactness and stability of the structure.

The design-technological solutions were applied in designing and erection of a number of objects in the USSR and abroad, on the combined bridge across the Red river in Hanoi (Vietnam).

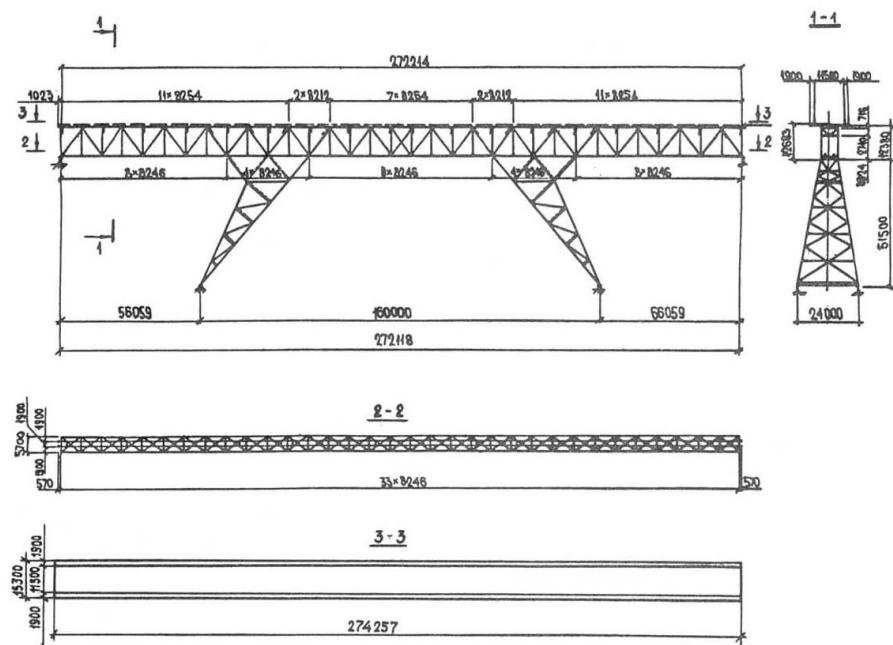


Fig. 1 Diagram of superstructure

The bends, measured in the course of tests, made 80% relative to the design ratings, and the axial stresses in the main girder elements - 70-85%. The bridge was normally operated within 10 years, and during the disastrous earthquake of 1988 the superstructure (Fig.2) suffered no damage.

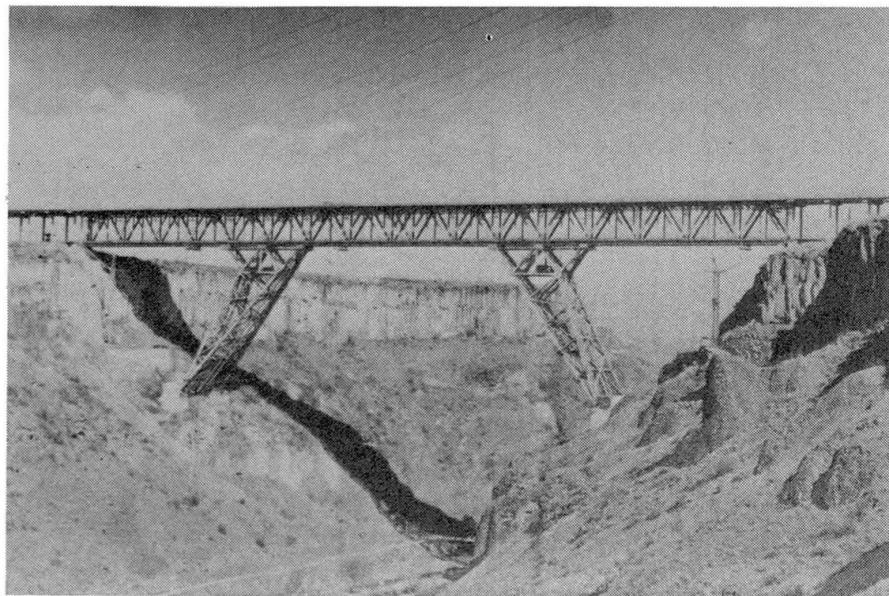


Fig. 2 General view of bridge