

# Fast prototyping of analog ICs using transistor arrays

Autor(en): **Declercq, Michel J.**

Objekttyp: **Article**

Zeitschrift: **Bulletin des Schweizerischen Elektrotechnischen Vereins, des Verbandes Schweizerischer Elektrizitätsunternehmen = Bulletin de l'Association Suisse des Electriciens, de l'Association des Entreprises électriques suisses**

Band (Jahr): **83 (1992)**

Heft 9

PDF erstellt am: **29.05.2024**

Persistenter Link: <https://doi.org/10.5169/seals-902819>

## **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

## **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

# Fast Prototyping of Analog ICs Using Transistor Arrays

Michel J. Declercq

**Whereas in the digital world CAD tools and the various techniques of prediffused transistor arrays have been successfully applied to VLSI-development, with very few compromises on performance, the analog world could not keep in step. Main reasons for that are the infinite variety of specifications and the constraints that are typical for analog circuits. The development time and cost was more important than the processing costs, reducing so the advantage of using transistor arrays. The recent appearance of a new generation of smart analog tools is actually changing this situation, giving a new interest to array-based design. After reviewing the design basis of the actual analog arrays, their architecture philosophy and trade-offs will be discussed for various technologies. Circuit design techniques and analog CAD tools dedicated to prediffused arrays will finally be presented.**

Since the early times of integrated circuits, full-custom design has been used as the optimal solution in terms of speed and small area. In the era of integrated VLSI systems, and with an evolving trend for ASICs, this design style is however almost unaffordable due to time and cost of both design and processing. Solutions to this problem have been found by new developments in the direction of design methodologies, CAD tools, and prediffused transistor arrays. These techniques have been successfully applied to digital VLSI, for which true silicon compilation is almost a reality. Moreover, advanced sea-of-gates techniques provide a fast and cheap access to silicon, with very few compromises on performance, except for the silicon area.

In the analog world, things did not move that fast for several reasons. Cell libraries have a limited use, owing to the infinite variety of specifications and constraints that are typical for analog circuits. Cells generators have been proposed, but these are usually restricted to a few circuit families and to a few technologies. The concepts of structured and hierarchical design, that have proven to be so successful in digital design, are not so widely applicable for complex analog circuits, especially when global parameters such as noise, offset, dynamic and linearity are critical issues. Analog design having long been an art as well as a science, the development time and cost were important compared to digital systems. In this framework, the impact of processing costs was relatively lower, reducing the advantage of using transistor arrays in analog design. Moreover, most analog designers being very conservative, they were quite reluctant to use a design style that reduced their degree of freedom

due to the quantified character of a prediffused array.

A major effort is actually under way in several research and development groups to create a new generation of smart analog tools. As fast and cheap prototyping is becoming more and more critical in ASICs development, mentalities are now evolving, and new generations of analog arrays in various technologies are receiving more and more acceptance in the analog world. As a matter of fact, analog arrays can provide key advantages that overcome many of their limitations. Advanced technologies such as Bicmos or full-dielectric isolation (D.I.) Bipolar would never be affordable for custom applications in another form than prediffused arrays. Personalization steps usually require 4 to 5 masks, combined with non-critical operations such as the interconnection metal layers. On the other hand, a full process may require as many as 16 or 18 masks, the most critical and expensive operations being located at the front end of this process.

## Design Basis of Analog Arrays

### Basic Features of MOS and Bipolar Devices as Analog Circuits Components

Bipolar technology has been for long the favorite choice for analog integrated circuits. Its most important characteristics are summarized in the analytical expression of the collector current  $I_c$  and of the transconductance  $g_m$ :

$$I_c = I_s \cdot e^{\frac{V_{BE}}{kT}} \quad (1a)$$

Bipolar transistors enjoy a good matching when realized on the same silicon substrate, because this match-

#### Adresse des Auteurs

Prof. Michel J. Declercq, Directeur du Laboratoire d'Electronique Générale, Ecole Polytechnique Fédérale de Lausanne, EL-LEG-Ecublens, 1015 Lausanne.



ing depends mainly on physical parameters rather than geometrical parameters. The emitter area appears as a coefficient in the saturation current  $I_s$ , while the base-emitter control voltage  $V_{BE}$  is located in the exponential term. The transconductance is very high, and varies linearly with  $I_c$ . The output conductance  $g_{ce}$  is low, the early voltage being in the range of 40 to 100 V for common technologies. Finally, the current driving capability of bipolar transistors is usually larger (by a factor of about 5) than for MOS devices of identical area. On the other hand, bipolar transistors suffer from some limitations too. Among them, the non-infinite input impedance, the need for a base polarization current, and the wasted area due to collector isolation are the most frustrating in analog design. The fundamental expressions of the drain current of MOS transistors are

$$g_m = I_c \cdot \frac{q}{kT} \quad (1b)$$

for the linear region:

$$I_D = \beta \cdot \left[ (V_{GS} - V_T) V_{DS} - \frac{V_{DS}^2}{2} \right] \quad (2a)$$

for the saturation:

$$I_D = \frac{\beta}{2} (V_{GS} - V_T)^2 \quad (2b)$$

while the transconductance is given by

$$g_m = \beta \cdot (V_{GS} - V_T) = \sqrt{2 \cdot \beta \cdot I_D} \quad (2c)$$

with

$$\beta = \mu \cdot C_{ox} \cdot \frac{W}{L} \quad (2d)$$

It readily appears that MOS performance is much more sensitive to technology, and directly depends on the geometrical size of the devices. The transconductance of an MOS transistor is more than one order of magnitude lower than its bipolar counterpart at identical size. The output conductance of MOS transistors is also usually rather poor, and directly depends on the channel length  $L$ . Moreover, the  $1/f$  noise may be critical for low-frequency amplifiers.

Initially, MOS technology was therefore considered for analog circuits only when small analog blocks had to be combined with CMOS logic on the same substrate. With MOS analog circuit techniques reaching

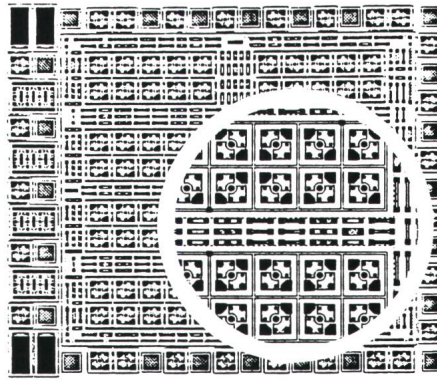


Figure 1 Bipolar analog transistor array (Ascom Microelectronics)

maturity, many new advantages have been found that largely balance the drawbacks. As a matter of fact, MOS devices can be used as resistors as well as control devices, they present a high input impedance, have an inherent dynamic memory capacity, and can be used as efficient switches for both voltage and current. Switched capacitor techniques have proven their high efficiency for filtering as well as for A/D or D/A conversion.

MOS analog circuits are now considered as interesting alternatives to bipolar in many applications. For this reason attention is now given to MOS analog transistor arrays, as described later. This short analysis also shows that the combination of both worlds in a state-of-the-art Bicomos technology opens a new era in analog design, including array-based designs.

#### Device-level Requirements for Analog IC Technologies

Besides the general requirements of any analog IC technology, such as compatibility with high-density logic, device matching, low-noise, medium- to high-voltage capability, etc., some desirable features can be specified for each technology on the basis of the considerations discussed hereabove. In MOS, those are for instance the free choice of device size ( $W$  and  $L$ ), the availability of high-quality capacitors, the floating-well capability, the availability of some CMOS-compatible lateral bipolar devices. In bipolar, good pnp-transistors, high-quality resistors, J-FETs and low-resistance cross-overs should be available.

### Analog Arrays Architectures

#### Bipolar Arrays

Trends in analog bipolar arrays directly reflect the conclusions hereabove. The core of the array con-

tains fixed-size transistors and a variety of resistor values, while some special components such as power transistors, capacitors, etc., are located at the periphery. In order to provide for a structured, modular design approach, transistors are usually grouped in blocs of 10 to 20, called tiles, surrounded by resistors. The ideal size of a tile should fit approximately the size of an analog subcircuit (voltage ref., comparator, buffer, amplifier, mixer, etc.).

In basic bipolar technologies, a much higher degree of freedom is obtained when each transistor can be used as a vertical npn as well as a lateral pnp, instead of being dedicated to one of those functions only. A good example of this philosophy is found in the Ascom array [1], where each tile is composed of 10 of these versatile devices, called twinstors (fig.1).

Advanced technologies feature full-D.I. isolation together with a much wide variety of high-performance devices such as true vertical pnps, J-FETs, zener diodes, and high-precision resistors (implanted and thin-film NiCr) [2; 3; 4]. Exceptional performance at an affordable cost is achieved with this type of array. Voltage capabilities range between 20 and 40 volts, while npn's cut-off frequency  $F_t$  use to be higher than 5 GHz (fig.2). Accurate models are available for the devices, owing to the reduced parasitics offered by D.I., and layout errors are restricted to custom routing. The wide variety of devices reduces, however, the degree of regularity and symmetry of the array, making it less compatible with auto place and route CAD tools.

#### CMOS and Bicomos Arrays

The architecture of CMOS arrays drastically differs from that of bipolar arrays. In most arrays, transistors have a regular size through the entire core. Complete freedom should therefore be allowed for making any combi-


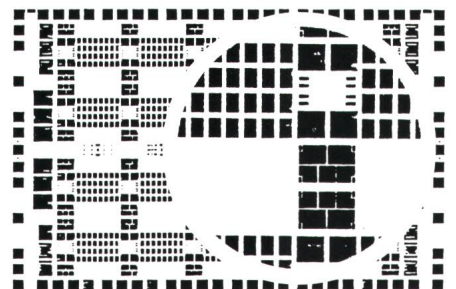


Figure 2 Complementary bipolar transistor array with full dielectric isolation Sipex



nation of serial and parallel connections of basic transistors, in order to simulate larger transistors with various  $W$  and  $L$  values. This feature gives the freedom to change the overall device transconductance, to increase its output conductance, to reduce the noise, and to select the appropriate trade-off between matching, silicon area and speed. Arrays are therefore made of

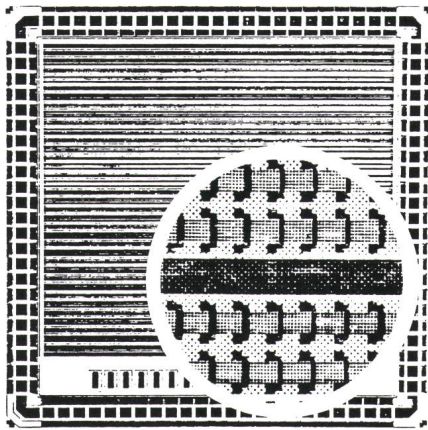

**Figure 3 EPFL CMOS SOG array for analog and digital applications**

a. Overall view of the array. The row of 16 large-size N-MOS transistors at the bottom are high-voltage (100 V) output devices.

b. Detail of the architecture. The basic cell is made of 2 N-MOS and 1 P-MOS transistors

continuous rows of transistors of both types, without any routing channel. Device isolation is based on the gate isolation method, commonly used in digital sea-of-gates arrays. In analog-compatible CMOS arrays, it is mandatory that the gates of n-channel and p-channel devices are not connected together, i.e. are not made out of a single poly-silicon stripe.


Figure 3 gives an example of an array designed at EPFL according to this philosophy, and usable for mixed analog-digital designs [5]. Symmetry, as well as full-transparency for routing through the cells in both directions, are key features for the analog performances of the array. Resistors are not available as such in the core of the array, except the low-ohmic poly-gate resistors. Designs must therefore be free of resistors, which is usually not critical except for some special circuits such as flash A/D converters or voltage references. Capacitors are more important for MOS design flexibility. Besides the junction capacitances or the gate capacitances, which are fundamentally non-linear, a good solution has been found using contact pads as capacitors [6; 7]. The poly as well as the metal layers can be used to

make a stack of capacitors that are mask programmable. These capacitors have been used successfully as compensation capacitors in amplifiers [8], or as charge storage devices in algorithmic A/D converters [9].

When a higher flexibility is needed, a special area of the array may be dedicated to special devices, such as a string of poly-resistors, a capacitor array, and some CMOS-compatible lateral bipolar transistors. A row of high-voltage NMOS or CMOS drivers, fully compatible with the standard low-voltage CMOS process, can also be located at the chip periphery (fig.3), [10]. Other array architectures that completely differ from the above principles have also been proposed. Most are dedicated to special applications such as SC filters. Combining the best of both worlds, Bimos arrays open the way to high-performance semi-custom analog or mixed analog-digital designs. An example of such an array developed at EPFL within the frame of an Esprit-II project is shown in figure 4 [6].

### Analog Circuit Design on Prediffused Arrays

Bipolar analog circuits built on transistor arrays exhibit characteristics that are very comparable to their full-custom version, except of course for the area. Trends are actually to propose a library of cells and subcells that fit in a tile, and are therefore pre-placed and routed. This reduces the development time of the system, and gives an easy access to high-performance standard functions such as opera-

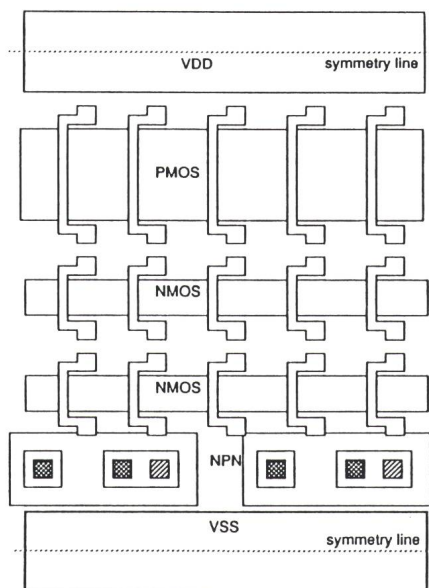

**Figure 4 EPFL Bimos SOG array (detail)**

Differential pairs	type 1	type 2	type 3
average offset voltage (mV)	11.7	6.6	2.2
transconductance ( $\mu\text{A/V}$ )	130.4	140.1	141.8
output conductance ( $\mu\text{A/V}$ )	2.2	0.43	0.43
differential output conductance error	2.50%	2.41%	0.24%

**Table I Characteristics of CMOS differential pairs realized on a CMOS transistor array**

Type 1: Minimum-size transistors

Type 2: Combination of 5-parallel, 4-serial transistors, no-common centroid

Type 3: Combination of 5-parallel, 4-serial transistors, common centroid

tional amplifiers or bandgap reference. A weak point of most bipolar analog arrays is the poor density achievable for the digital control blocks that are integrated on the same chip.


MOS arrays, as stated before, can yield reasonable performance for analog circuits, using the appropriate technique. As a matter of fact, basic transistors use to be minimum-length devices and exhibit rather poor performance when used without precautions in critical parts of the circuits. The performance of basic building blocks implemented on a CMOS array can be significantly improved by using serial/parallel connections of basic devices, together with an appropriate symmetry of the layout configuration [7; 11]. Table I summarizes most important measurement results for differential pairs realized on a  $2\text{ }\mu\text{m}$ -technology CMOS array. As expected, non-minimum differential pairs made of serial/parallel combinations have a much smaller offset voltage than pairs realized with single elementary transistors. The matching of output conductances, as well as their absolute values, are also much better.

The effect of serial connection of minimum-length devices on the overall output conductance is illustrated in table II for a  $1.2\text{ }\mu\text{m}$ -technology. The output conductance effectively drops with the total channel length, but not as fast as for single long-channel devices as used in full-custom design. Table III summarizes the performances obtained for a classical operational

channel length ( $\mu\text{m}$ )	output conductance ( $\mu\text{A/V}$ )	
	single transistor	custom transistors
1.0	104	104
2.0	48	65
4.0	19	37
8.0	6	20

**Table II Comparison between the output conductance obtained with a single long-channel custom transistor and a series of short-channel transistors**



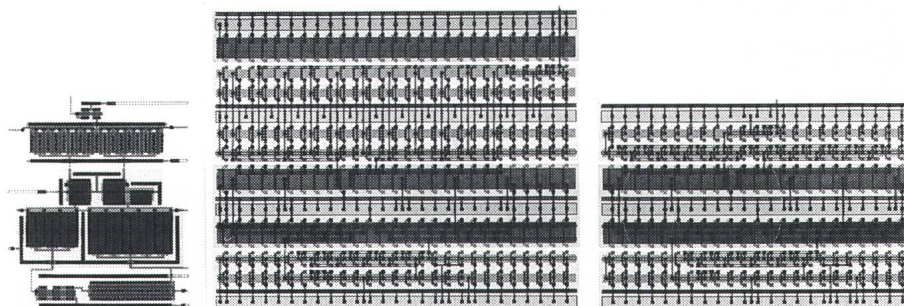

**Figure 5** Layout comparison of 3 implementations of the same OTA

Left: Full-custom design; Center: Semi-custom design on EPFL CMOS SOG array (normal size); Right: Semi-custom design on EPFL CMOS SOG array (minimum size)

transconductance amplifier (OTA). For the sake of comparison, this circuit has been realized in 3 versions in the same technology: a full-custom layout, an array-based semi-custom version with the appropriate transistor sizes, and a second array-based version with minimum channel-length transistors (fig.5), [7]. Besides the increase in off-set voltage and in silicon area, performances are very comparable between the full-custom and semi-custom versions, demonstrating that CMOS arrays are suitable for many non-critical mixed-mode applications.

Bicmos analog circuit performance is even less degraded compared to their full-custom version, due to the superior matching characteristics of bipolar transistors. Table IV summarizes the results obtained for a comparator and for an operational amplifier implemented on the EPFL Bicmos array.

## Dedicated CAD Tools and Customization Steps

CAD tools have for long been the privilege of digital design, and if a few tools have appeared for analog full-custom, there has been almost nothing available for semi-custom analog design until very recently. For CMOS

	unit	type 1	type 2	type 3
transconductance (mean value)	$\mu\text{A/V}$	96.5	108.1	92.0
transconductance (variance)	$\mu\text{A/V}$	3.9	4.0	9.3
linearity range	mV	103.1	100.0	122.1
offset voltage (mean abs. value)	mV	2.06	4.38	10.8
gain.bandwidth product	KHz	901	746	843
phase margin		68	53	60
slew-rate ( $C_L=5\text{pF}$ )	V/ $\mu\text{s}$	1.05	1.3	1.3

**Table III** Compared results for 3 implementations of the same OTA

Type 1: Full custom

Type 2: CMOS array (normal size)

Type 3: CMOS array (min. size)

	Bicmos array	full-custom
<b>Comparator</b>		
max. frequency (MHz)	40	55
output fall time (ns)	8.5	3.5
<b>OP-AMP</b>		
gain.bandwidth (MHz)	18.4	15.1
phase margin	54	98
open-loop gain (dB)	86	86

**Table IV** Comparison of electrical results for Bicmos analog circuits

and Bicmos arrays, EPFL has developed a large set of tools including layout edition, cell generation, design verification and parameter extraction. Alps, an automatic place and route tool dedicated to the implementation of bipolar analog schematics on a transistor array, has been presented recently [12]. This tool actually supports a single custom metal layer, and takes into account several categories of user-imposed constraints. Harris Fastrack [4] is another example of a comprehensive set of software tools that enable the user to interactively design a bipolar analog IC, then estimate and optimize its yield.

For keeping their edge in fast prototyping, transistor or gate arrays must be processed using a fast and cheap method. Besides the classical photolithographic process, new fast and cost-effective solutions have appeared on the market. Direct-write E-beam and laser beam processing are now making a breakthrough in this area, and are making the array-based semi-custom approach still more attractive.

## Conclusion

Analog semi-custom design on transistor arrays has emerged from a poor man's solution to a major design style, making fast prototyping possible at a reasonable cost, and even giving access to high-performance technologies that would not be affordable in any other design style.

Array regularity is the key for design flexibility, and is also the most appropriate for design automation. Array compatibility with mixed analog/digital designs is also an important feature, since most analog circuits need some type of control logic. Analog-compatible Bicmos arrays are basically combining the best features of MOS and bipolar. These high-performance arrays are particularly attractive for high-speed mixed analog/digital designs, such as used in telecommunication applications.

Array-dedicated CAD tools are only emerging, as far as analog applications are concerned; they may give a serious boost to analog semi-custom design. Whatever the technology of the array, the customization steps are simple and standard, and can therefore be processed locally. This interesting feature helps cutting both delay and price, while guaranteeing a better design confidentiality. Moreover, overnight processing is now in sight with advanced customization processes such as laser-beam and E-beam lithography.

Switzerland enjoys a pole position in the analog semi-custom field. Several European Community contracts have been awarded in this field to both academic and industrial partners, confirming the interest for this attractive ASIC technology.

EPFL has been active since more than 4 years in the field of advanced Bicmos arrays for mixed analog/digital design, and is now pursuing a successful industrial transfer of the results, while continuing research activities in dedicated design techniques and design automation tools.

## References

- [1] Bipolar Analog Array Data Book 1991, Ascom, Bevaix, Switzerland.
- [2] 1991 Analog Array Data Book, Sipex, Billerica, MA.
- [3] Tektronix, Integrated Circuits Operation, Bipolar Products, Tech. Data, 1991.
- [4] Bipolar Analog Asic Product Portofolio, Harris, Melbourne, FL., 1991.
- [5] Ph. Duchêne et al.: IEEE JSSC, 24(1989)3, pp. 576-584.
- [6] Ph. Duchêne et al.: C ICC'91, San Diego, May 1991, pp. 14.2.1.-14.2.4.
- [7] Ph. Duchêne: EPFL-Electronics Labs., PhD Thesis No. 962, 1991.
- [8] G. Wegmann: EPFL-Electronics Labs., Internal Report, Feb. 91.
- [9] A. Osseiran: EPFL-Electronics Labs., Internal Report, Jan. 91.
- [10] M. Declercq, M. Novak: EPFL-Electronics Labs., Semicustom Design Course, March 1992.
- [11] M. Epitoux, J. Spicher: EPFL-Electronics Labs., Internal Report, March 91.
- [12] O. Buset et al.: CICC'91, San Diego, May 1991, pp. 5.6.1.-5.6.4.




Siegfried Peyer AG  
peyerenergie



**Lötfrei,  
schraubfrei,  
abisolierfrei –  
LSA-PLUS die  
zukunftssichere  
Anschlusstechnik  
für Ihr  
Kommunikations-  
Netz**

peyerenergie  
CH-8832 Wollerau  
Telefon 01/784 46 46  
Telex 875570 pey ch  
Fax 01/784 34 15

Schweizerischer Elektrotechnischer Verein  
Association Suisse des Electriciens  
Associazione Svizzera degli Elettrotecnici  
Swiss Electrotechnical Association



## **ⓈICHER MIT ⓈICHERHEITSZEICHEN**

Gewähr für grösstmögliche Sicherheit bieten elektrische Erzeugnisse, die das Sicherheitszeichen tragen. Es bedeutet, dass sie vom SEV geprüft und vom Eidg. Starkstrominspektorat zugelassen sind. Dieses Material entspricht den Regeln der Technik. Deshalb lassen Hersteller und Importeure ihr Material beim SEV prüfen, und deshalb achten Konsumenten beim Kauf von elektrischen Erzeugnissen auf das Sicherheitszeichen.

### **Auskunft:**

Schweizerischer Elektrotechnischer Verein, Seefeldstrasse 301, Postfach, 8034 Zürich  
Telefon 01/384 91 11 – Telex 817 431 – Telefax 01/55 14 26





*Für Unternehmer mit Zukunft  
ein Kommunikationssystem, das mitzieht.  
Ascoline.*



Das universelle Systemgerät  
Brigitt 202 ist Komfort-, Team-  
und Chef-/Sekretärapparat  
in einem.

Geschäftsleute mit Vorwärtsdrang haben bei manchen Teilnehmervermittlungsanlagen einen schweren Stand. Ascoline hingegen macht den Geschäftsverkehr von Unternehmen mit 30 bis über 300 Mitarbeitern wesentlich beweglicher. Problemlos integriert es neue Technologien wie z. B. ISDN und kommt Ihren Bedürfnissen nach Erreichbarkeit, Flexibilität und Ausbaubarkeit individuell entgegen. Selbstverständlich auch, wenn Sie Ascoline mit mehreren Firmen teilen. Über den zukunftsicheren Kommunikationskomfort von Ascoline halten wir Sie gerne auf dem laufenden. Rufen Sie einfach eines der Regionalzentren der Ascom Business Systems AG in Ihrer Nähe an. Zürich: 01/823 14 14, Bern: 031/999 44 93, Lausanne: 021/641 42 11. Oder Ihre Fernmeldedirektion, Telefon 113. **TELECOM** 

Teilnehmervermittlungsanlagen: **ascom** denkt weiter.