

National Institute for nuclear science

Autor(en): **[s.n.]**

Objektyp: **Article**

Zeitschrift: **The Swiss observer : the journal of the Federation of Swiss Societies in the UK**

Band (Jahr): - **(1958)**

Heft 1333

PDF erstellt am: **24.09.2024**

Persistenter Link: <https://doi.org/10.5169/seals-693991>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.


Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

Ein Dienst der *ETH-Bibliothek*
ETH Zürich, Rämistrasse 101, 8092 Zürich, Schweiz, www.library.ethz.ch

<http://www.e-periodica.ch>

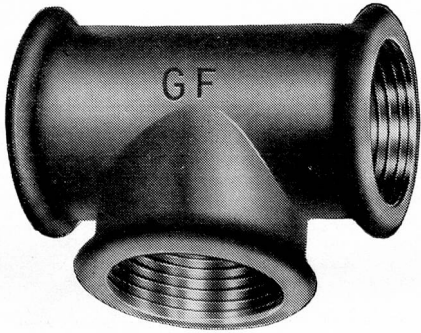

GF MALLEABLE IRON TUBE FITTINGS

for the leakproof connection of steel tubes for the conveyance of

GAS, WATER, STEAM, AIR, OIL

Every fitting individually tested to 360 lb. per sq. inch

Send for illustrated catalogue to

LE BAS TUBE CO., LTD.

(Member of the GF Group)

CITY WALL HOUSE, 129, FINSBURY PAVEMENT LONDON, E.C.2

Pictures like this that can't be posed—the living, breathing, moving happenings that make the best pictures of all can only be taken with a cine camera. And the beauty of it is that cine films are far from expensive. With this Bolex B8 you can take 24 or more good length action sequences for just over £1, including processing charge. At under 11d. a shot this compares very favourably with ordinary still photography. See the Bolex B8 at any good photo shop. Note its precision construction—so vital in a cine camera. That's because it is made in one of the great watch-making centres of Switzerland.

you get it all



CINE CAMERA



with a



BOLEX B8

The Swiss Precision cine camera

Send for brochure

CINEX LTD., Burleigh Gardens, N.14.

Name

Address



NATIONAL INSTITUTE FOR NUCLEAR SCIENCE.

A contract worth considerably more than half a million pounds has been placed with British Brown-Boveri Limited by the Governing Board of the National Institute for Research in Nuclear Science. It covers the supply and installation of the complete electric converting plant for the 7,000 million electron volts Proton-Synchrotron being built on a site adjacent to the Atomic Energy Research Establishment at Harwell. Brown, Boveri & Co., Limited, Switzerland, are to design the plant and to supply from their Baden Works approximately three-quarters of the machinery required whilst the balance will be manufactured under the firm's licence at a British Works. The converters, which consist of 96 single-anode type grid controlled mercury arc steel tank rectifiers/inverters, are fed by two motorised flywheel driven 60,000 kVA alternators to be supplied by a British firm under a separate contract and co-ordination of design of the complete power plant is Brown-Boveri's responsibility.

The plant must be capable of feeding into the magnet coils of the Proton-Synchrotron a continuous series of direct current impulses rising to a value of 8,000 amps.; the maximum pulse pressure being 18,000 volts, and the repetition rate 26—28 pulses per minute. The extensive control system *inter alia* provides for the recovery of the electrical energy stored in the magnet at the end of each pulse and initially supplied by the alternators via the rectifiers whereby the latter, working as inverters, convert the direct current flowing back from the magnet into alternating current, which in turn is fed back into the alternators and stored as kinetic energy. Thus the net electric energy to be supplied from an outside source is relatively low and just sufficient to compensate the losses of the power plant and magnet.

The power plant is a major part of the Proton-Synchrotron of which the main component is a magnet ring, 120 feet in diameter, weighing over 6,000 tons. Protons injected into the ring shaped high vacuum tube are accelerated in a circular orbit until they have acquired a total energy of the order of 7,000 million electron volts when they are allowed to strike target atoms.

The Proton-Synchrotron ranks amongst the world's largest accelerators in operation or now being built. Brown-Boveri's acquired knowledge and experience in designing and manufacturing the power plant for the 25,000 million electron volts Synchrotron for the European Council's Nuclear Research Establishment at Geneva (CERN) have been decisive in securing the contract for the Harwell converting plant. Whilst the CERN Synchrotron has a magnet ring of about 600 feet diameter, the pulse frequency is 12 per minute. For the Harwell accelerator, with a pulse frequency of 28 per minute, the energy required to charge the magnet is higher than for the CERN installation.

TO OUR SUBSCRIBERS.

In order to save both money and time the Publishers would be much obliged if subscribers who are in arrears with their subscription would kindly send their remittance as soon as possible.

Specimen copies of the "Swiss Observer" will be gladly sent to addresses, supplied to our office, of likely subscribers.