

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 3 (1979)
Heft: C-10: Bridges I

Artikel: Bridges at Moerdijk, Spijkenisse and Keizersveer (Netherlands)
Autor: [s.n.]
DOI: <https://doi.org/10.5169/seals-15836>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Siehe Rechtliche Hinweise.

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. Voir Informations légales.

Terms of use


The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. See Legal notice.

Download PDF: 24.05.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Department of Bridges of the Ministry of Transport and Public Works in the Netherlands

Bridges at Moerdijk, Spijkenisse and Keizersveer

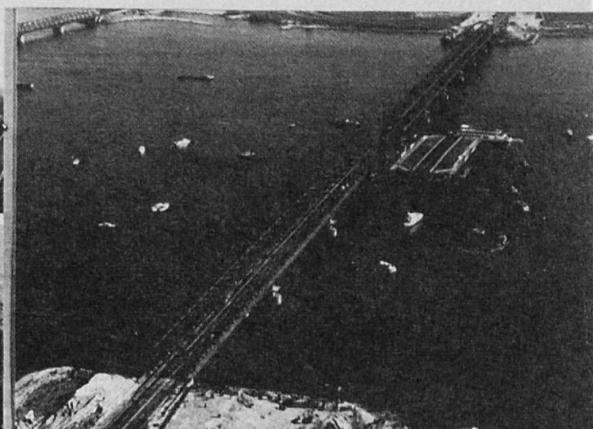

INTRODUCTION

The old Moerdijk bridge built in 1936 and crossing the Hollandsch Diep was no longer capable of handling nowadays traffic. The ministry of Transport and Public Works therefore decided to replace the old bridge by 10 steel bridge spans, each 100 metres long and 42,9 metres wide.

5. The old span of the Moerdijk bridge is temporarily moored on the Hollandsch Diep.
6. Even at night the work continued.
7. The difference between the old and new section is striking.
8. The last span almost on its destination: November 26th, 1977.

1. View of the old Moerdijk bridge with its ten spans. Between April 1976 and January 1978 this view changed approximately every two and a half months when one of the old spans was replaced with a new section. The piers of the first bridge could be maintained to support the new bridge section.

2. Assembly yard for welding steel components into sections of 100 metres.
3. An old span is removed, using a floating structure and tugs.

4. The floating structure and the new bridge section are now stationed in front of the gap. They are then manoeuvred into position between the piers. After the span is correctly positioned the tanks of the floating structure are flooded and the new section drops slowly into place. On April 3rd, 1976 the first change of sections was completed.

9. Aerial view of the new bridge as completed in 1978.

The old spans, available after their replacement were in turn used to replace 2 other bridges. Four spans were used to build a new vertical lift-bridge at Spijkenisse spanning the Old Meuse river. The remaining 6 spans were used for a new bridge at Keizersveer, spanning the river Bergsche Meuse.

- 10 and 11. Old and new Spijkenisser bridge.
12 and 13. Old and new bridge at Keizersveer.

