

Byker Viaduct, Newcastle (Great Britain)

Autor(en): **Smyth, W.**

Objekttyp: **Article**

Zeitschrift: **IABSE structures = Constructions AIPC = IVBH Bauwerke**

Band (Jahr): **5 (1981)**

Heft C-16: **Structures in Great Britain**

PDF erstellt am: **29.04.2024**

Persistenter Link: <https://doi.org/10.5169/seals-16966>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



5. Byker Viaduct, Newcastle (Great Britain)

*Owner: Tyne & Wear Passenger Transport Executive
Engineer: Ove Arup & Partners*

*Consulting Architect: Renton Howard Wood Levin
Partnership*

Contractor: John Mowlem & Company Limited

Works duration: 30 months

Service date: 1980

The site

Byker Viaduct carries two tracks of the new Metro in Tyne & Wear, north-eastern England. It is about 800 m long, an S-bend in plan and the vertical alignment also contains curves. The site consists of two distinct parts. At the west end there is the Ouse Burn Valley, about 30 m below the viaduct with very steep side slopes covered with loose fill. Outside the valley the viaduct alignment is about 6 m above a gently sloping hillside.

Design

The valley section had very different conditions for construction from the rest of the viaduct. The valley was awkward to get to and to work in, construction was at a considerable height and foundation conditions were difficult, with coal mine workings near the surface; whereas the other section was much more straightforward. However it was necessary to find an overall concept for economy in construction and for appearance.

The best and most economical scheme was a continuous prestressed concrete box girder (Fig. 1), the valley section having 69 m spans fixed to the columns, and elsewhere sitting on bearings on top of the

columns with spans of 50 m and 36 m. This scheme had concrete way beams to support the track rather than ballast.

The deck was designed to be constructed from pre-cast concrete segments with epoxy resin joints and to be erected using a simple hoist sitting on the nose of the cantilever.

Across the valley there are four balanced cantilevers from the four double piers. These piers were designed to be built up to the top of the deck so that the hoist could sit on top and lift up the first deck units (Fig. 2).

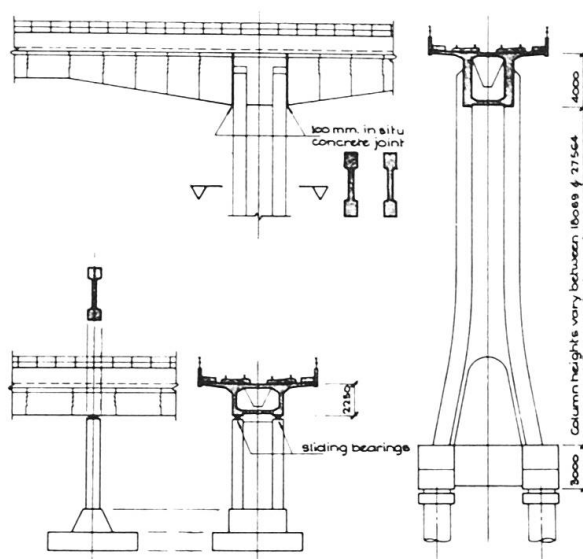


Fig. 2 Typical columns

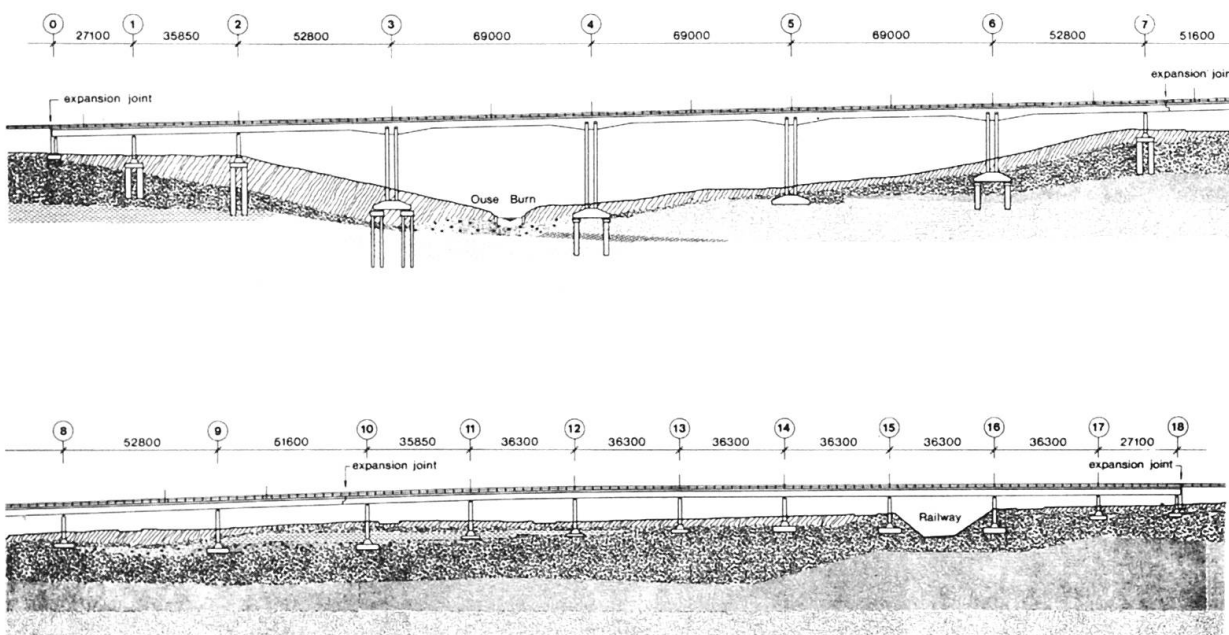


Fig. 1 Developed elevation of viaduct

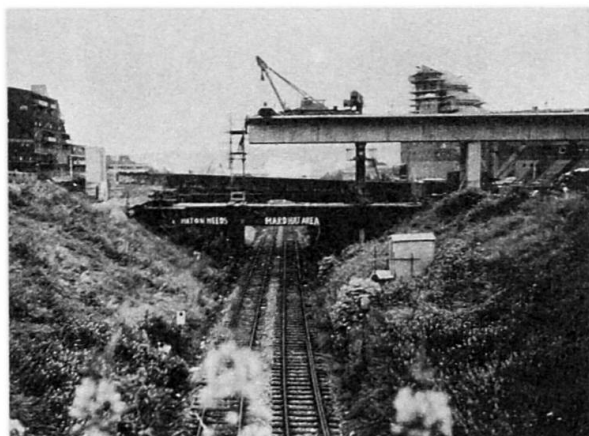


Fig. 3 Erection by continuous cantilevering with temporary props

The other spans were designed to be built as continuous cantilevers using temporary props (Fig. 3). Erection of the longest part was to start at pier 14 and proceed in both directions as far as the expansion joints near piers 10 and 18 (Fig. 1), giving casting runs of about 2×150 m.

There are two prestressing systems. Bars which were coupled at each joint were used to clamp successive segments together and also provide part of the permanent prestressing force. Multi-strand cables threaded through ducts in a number of segments provide the greater part of the prestress.

There are four expansion joints, two at the abutments, and two others which are halved joints cast in situ.

Construction

The viaduct segments were cast on site using the adjustable pallet technique. One mould with two pallets and two cores was used for 253 segments with a casting cycle of one unit per day.

The contractor designed a special hoist – shearlegs and winch – for erection, and a purpose-made rig on a low loader which was used for handling the units and moving them to and from their stored positions. Rail tracks were used to lower segments down the slopes of the valley (Fig. 4).

The epoxy joint was thickened with layers of fibreglass to correct the alignment during erection. Some difficulties were experienced due to “twisting” of the alignment on the longest casting runs of about 150 m, but these were successfully overcome.

Finishes

The climate of Newcastle is wet and dirty and the surfaces were carefully detailed for weathering. The columns and the parapets are the most exposed to weather and they have been given a vertically ribbed finish with the outer face tooled to expose the aggregate. The rails are fixed to concrete slabs which were constructed using a slip form paver. The deck is waterproofed with a thin trowelled membrane.

(W. Smyth)

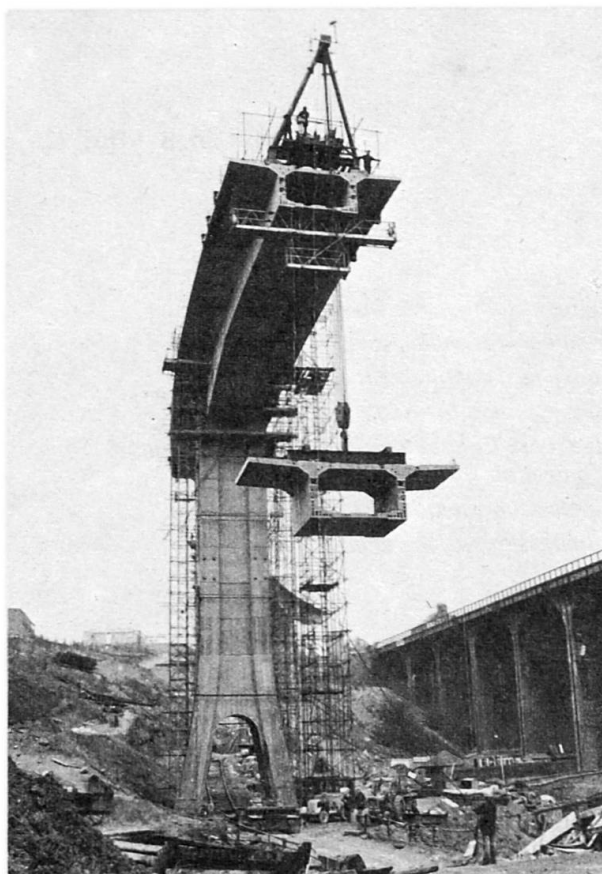


Fig. 4 Erection by balanced free cantilevering

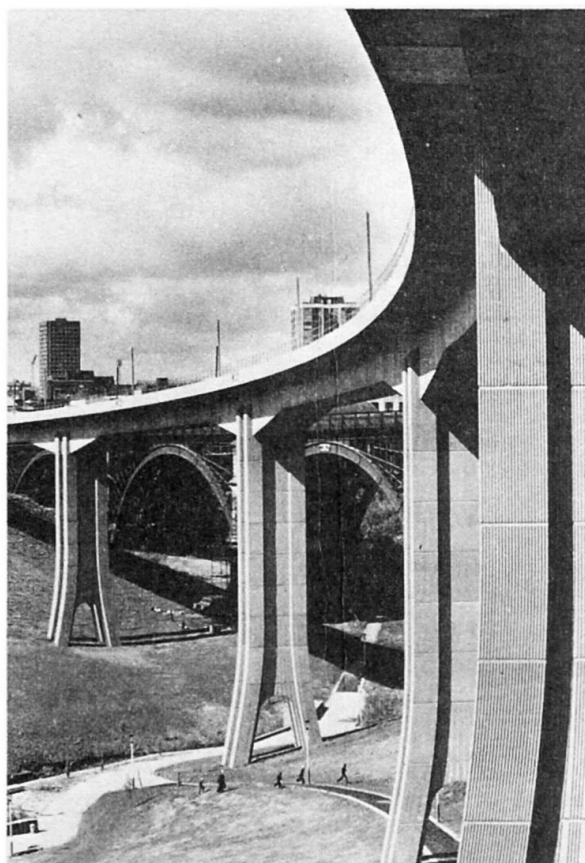


Fig. 5 The finished viaduct