

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 5 (1981)  
**Heft:** C-16: Structures in Great Britain

**Artikel:** "The Revolution", Blackpool (England)  
**Autor:** Bardhan-Roy, B.K.  
**DOI:** <https://doi.org/10.5169/seals-16968>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 17.04.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## 7. "The Revolution", Blackpool (England)

*Owner: Blackpool Pleasure Beach Company*

*Architect (Consulting): Day & England*

*Engineer: Jan Bobrowski and Partners*

*Contractor: Blackpool Pleasure Beach Company*

*Steelwork Sub-Contractor: Robert Watson & Co  
(Constructional Engineers) Ltd.*

*Supply of Central Arch & Mechanical & Electrical  
Equipment: Arrow Development Company, USA*

*Works duration: 10 months*

*Service date: November 1979*

The supporting structure of the 194 m long winding track for "The Revolution" ride (or "The Loop" as it is called in the USA) at Blackpool Amusement Park consists of three steel latticed arches. Two circular ones at the ends form the "loading structure" and the "return structure" respectively, each of which has an overall length of 56.8 m. The span of these arches is 32 m with a cantilever overhang of 23.8 m. The width is generally 3.25 m. The central arch which has been designed as three-pinned, is parabolic and has a span of 25 m with a rise of approximately 16 m.

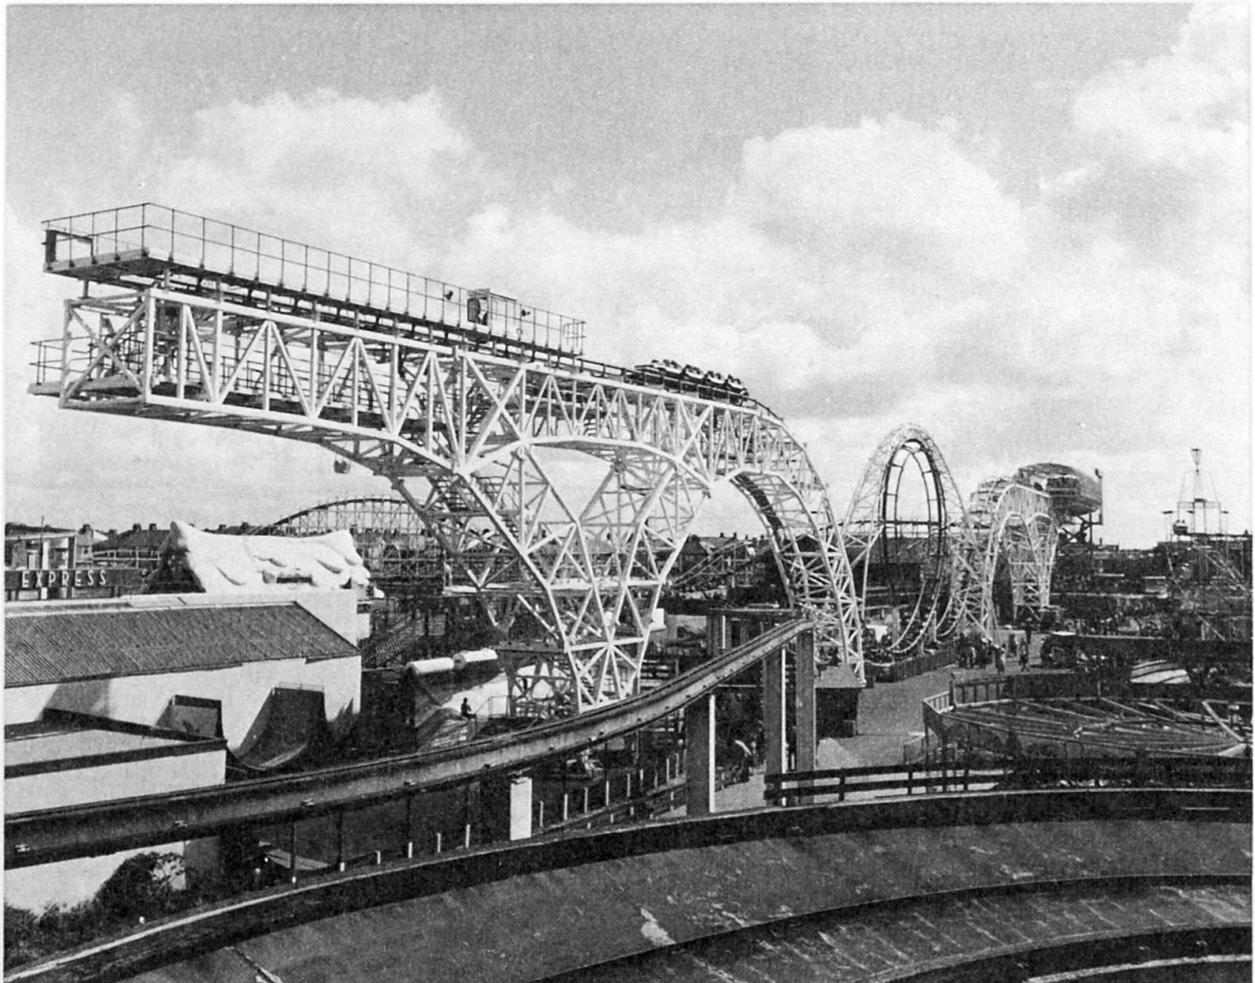


Fig. 1 Overall perspective

The  $16.8 \times 6.6$  m station building is supported at the cantilever end of the "loading structure" whereas the "return structure" accommodated 29.7 m long platform at the far side.

The central arch is of welded tubular steelwork while the other arches consist of square rolled hollow section.  $200 \times 200 \times 10$  sections form the top and bottom boom throughout while the verticals and diagonals are generally  $100 \times 100$  or  $120 \times 120$ . The straight length has been maintained between nodal points to eliminate as far as possible the secondary stresses due to curvature. The loading structure was prefabricated in seven large sections weighing up to 27 t. The return structure was fabricated in eight component

parts. The site joints were achieved by bolted connections away from the nodal points. Sequence of erection and site connection design of different components virtually eliminated the use of any scaffolding for erection.

Weather protection treatment to structural steelwork consisted of shot blasting to British Standard followed by zinc metal spray (150 micron) and one coat of Protectomat seal and one coat of primer. One coat of finishing paint was applied on site.

The arches were founded on piles. Altogether 118 bored piles each of nominal 500 mm diameter were installed.

*(B. K. Bardhan-Roy)*



Fig. 2 Central loop and arch