

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 14 (1992)

Artikel: Design strategy for industrialized building system

Autor: Janssen. J.F.G.

DOI: <https://doi.org/10.5169/seals-853190>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 23.03.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Design Strategy for Industrialized Building System

Stratégie pour la conception d'un système de bâtiments industrialisés

Entwicklungsstrategie für eine industrialisierte Bau konstruktionsart

J.F.G. JANSSEN

Ing., Archit.

Eindhoven Univ. of Technology

Eindhoven, The Netherlands

The Industrial load bearing system for housing based on (de)mountable sheet-steel elements "STRUCTURE" developed by ir. J.O. Bats at the Eindhoven University of Technology forms a very precise and dimensionally stable environment, based on the principle of modular coordination, so that the finishing systems can be industrially produced with predictable tolerances and fitting components.


In addition to "STRUCTURE", we can distinguish another three main systems for finishing the building namely: "ENVELOPE" (subsystems: façade, roof), "INTERIOR" (subsystems: floor, ceiling, prepositioned and partition walls), "MECHANICAL" (subsystems: electricity, gas, water, central heating supplies, sewerage and communication).

The main conditions for developing these four main systems: structure, envelope, interior and mechanical are: (1) industrial production, (2) (de)mountable at all levels, (3) flexibility in use and (4) suitability for an open building system.



In order to develop of these four main systems, it is necessary to specify:

1. their place within a modular grid,
2. the building sequence,
3. the level of integration of the connections between the building components,
4. the technical requirements of the systems and their connections.

Ad 1. the location of every building component in the four main systems is defined by the same particular tartan grid based upon a 300 mm grid.

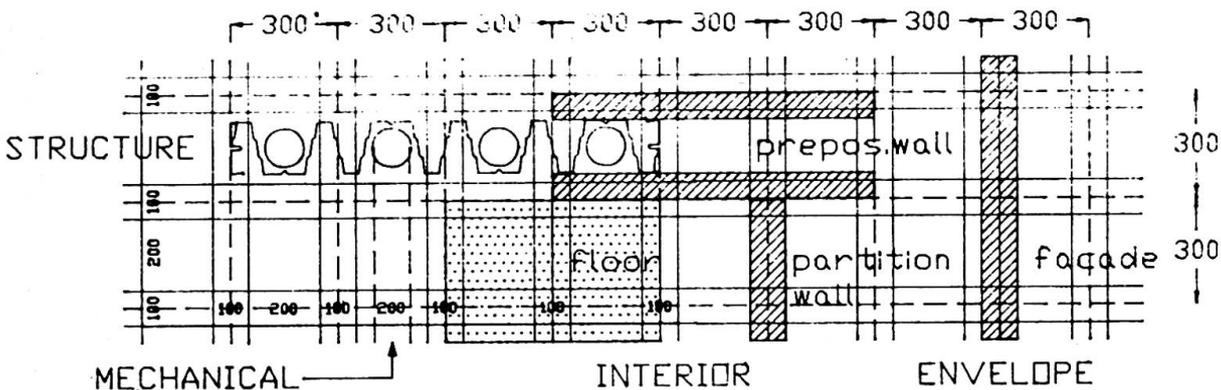

Ad 2. the building sequence of the three finishing systems: interior, envelope and mechanical, is also prescribed by scenario alterations for guaranteed flexibility in use and with different lifespans of the building components in mind. Accessibility of the piping systems is important in this respect.

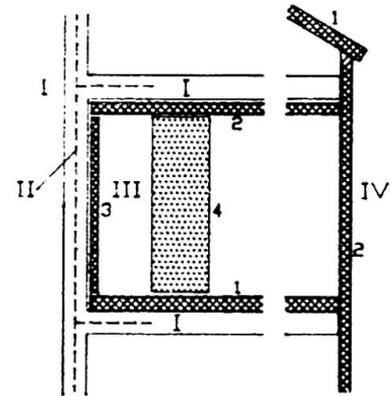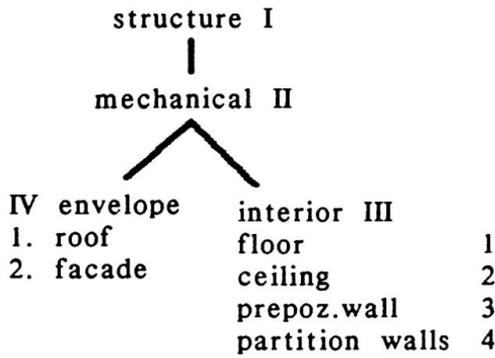

Ad 3. The connections between the building components are divided into five categories: remote (no direct relation), touching, connected, meshed and unified. In this sequence, five levels of integration are indicated. The required level of integration of connections was approximated from a case study of planning an alteration from one spatial layout of a dwelling to another, for which considerable less building time is needed, if the connections between building components are as contiguous as possible and the building materials within a subsystem are to be as "unified" as possible, to ensure easily manageable building components.

Two-system combinations	Three-system combinations
1 S+E	1 S+E+M or
2 S+M	S+E
3 S+I	S+M
4 E+M	E+M
5 E+I	
6 M+I	2 S+E+I or
	S+E
	S+I
	E+I
	3 E+M+I or
	E+M
	E+I
	M+I
	4 S+M+I or
	S+M
	S+I
	M+I


Ad 4. In addition to theoretical fire-protection, acoustics and strength requirements research is in progress on an experiment, scale 1:1 to test the building components in combination with each other in the field of fire protection, acoustics, handling and utility.

After describing the building components of the four systems it is relatively easy to make design studies and calculations of the projects by using CAD.


This includes:

- all the components of the load-bearing system structure
- all the components of the subsystems, such as:
 floor - ceiling prepositioned walls and partition walls interior
 façades and roofs envelope
- all those of the installations mechanical
- and all the agreements on modular coordination between the systems.


These libraries become now related to each other in a special tablet within Autocad.

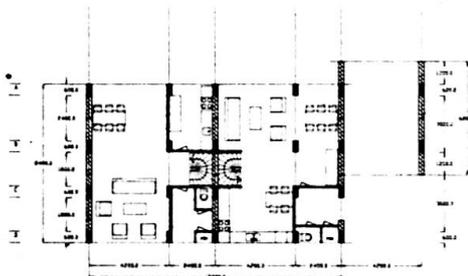

plan

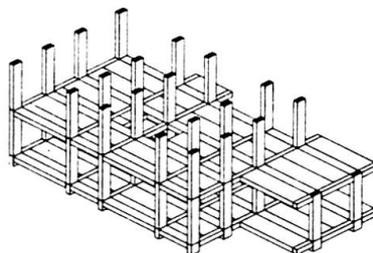

structure

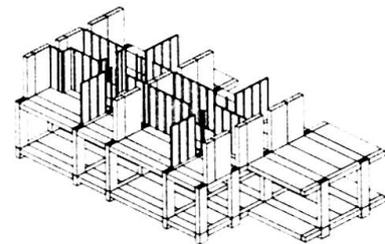

interior

References

1. Rush, the building System Integration handbook, the American Institute of Architects, 1988
2. Kantelberg, B.M.F., Optimalisatie van de variabiliteit van een componenten bouwsysteem (case study) (in Dutch) Afstudeerrapport T.U.E. 1991
3. Bats, J.O., Janssen, J.F.G., a new concept for Industrialized Housing. Proceedings IFHP-international congress, Chiba, Japan, IFHP 1989, pp. 35 - 42.

Leere Seite
Blank page
Page vide