Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke

Band: 12 (1988)

Heft: C-44: Structures in Finland

Artikel: The Norrströmmen Bridge, Nauvo (Finland)

Autor: Nieminen, Jouni / Karri, Juhani

DOI: https://doi.org/10.5169/seals-20901

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Mehr erfahren

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. En savoir plus

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. Find out more

Download PDF: 22.11.2025

ETH-Bibliothek Zürich, E-Periodica, https://www.e-periodica.ch



1. The Norrströmmen Bridge, Nauvo (Finland)

Owner: Finnish Roads and Water-

ways Administration

(RWA)

Construction designer: Y-S Engineering
Contractor: Lemminkäinen Ltd.

Works' duration: 19 months

Commissioning year: 1986

Span dimensions: 30.0 + 80.0 + 135.0 + 65.0

= 310.0 m

Effective width: 8.5 m

Structural height: at support 7600 mm, at

midspan 3092 mm

Material quantities

concrete, substructures 831 m³ concrete, superstructure 2400 m³ reinforcement, substructures 112 000 kg reinforcement, superstructure 300 000 kg prestressing steel 89700 kg

The Norrströmmen bridge is located in south-western Finland, in the Archipelago of Turku. Together with another, smaller bridge, this bridge replaces two public road ferries. The total costs of the road replacing the ferries amounted to FIM 24 million, of which the share of the Norrströmmen bridge was FIM 11 million. The mere operating costs of the withdrawn ferries were FIM 2 million annually, i.e. the project was a very profitable one economically. In the design of the bridge, it has been attempted to protect the sensitive landscape of the archipelago by making the bridge so long that it crosses the entire water area as fluently and flowingly as possible.

The bridge is for its main parts built according to the balanced cantilever method, starting from the two intermediate supports. Of these intermediate supports, one is rigidly attached to the bridge deck. The other one is provided with bearings. During the cantilever works, it was temporarily rigidly attached to the bridge deck by means of a reinforced concrete collar. Before the bridge deck was joined in the middle of the bridge, the concrete collar was sawn off. The 40 meters long part of the bridge running on dry land was built in a conventional way, with scaffolding supported onto ground.

At the end of the cantilever stage, a light auxiliary support of steel construction was used under the cantilever on the land side, to decrease the unbalance moment affecting the column. The auxiliary support was always released after the symmetrical piece had been cast.

During the works, the cantilevers' deflections developed according to the plan prepared in advance, and no changes were required in the plan.

The prestressing steels of the cantilever stage were anchored at the joints of the deck flange and the web. The prestressing steels of the lower flange were anchored to bosses near the web. The webs have not been pretensioned. The web's shear stress by full effective load is 3.0 MPa and the maximum principal tensile stress is 1.2 MPa.

The first one of the bridge's two cantilever sections was built during summer. The other one had to be built in winter. The project schedule required for the deck casting to progress by two pieces a week, which meant that the concrete had to cure to the 28 MPa strength required by prestressing in 3 days. In order to achieve this rate also at a temperature of up to -20° C, a heatinsulated envelope was built around the cantilever formworks. The envelope was needed to protect the workers as well, in the severe winter conditions. The prestressing steels stressed in winter were not grouted till in the summer, after the outdoor temperature had permanently risen to over $+5^{\circ}$ C. The steels were then temporarily protected against corrosion with a water-soluble protective agent.

Due to difficult communications, it did not pay to bring the concrete to the construction site from a permanent concrete station, but a separate concrete station including laboratories was established at the site for the duration of the works. The fresh water required in the production of the concrete was obtained from ground water. For this purpose wells had to be drilled into the bedrock on both shores.

(Jouni Nieminen, Juhani Karri)

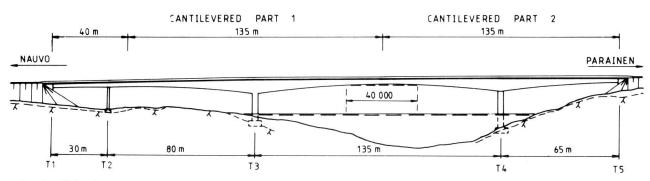


Fig. 1 Side view



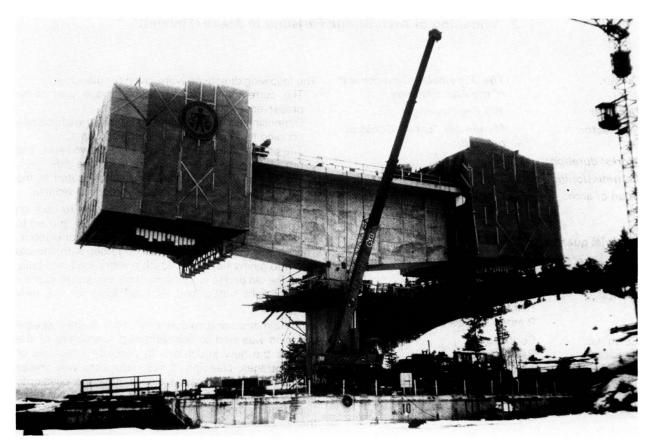


Fig. 2 Cantilever formworks with heat insulation

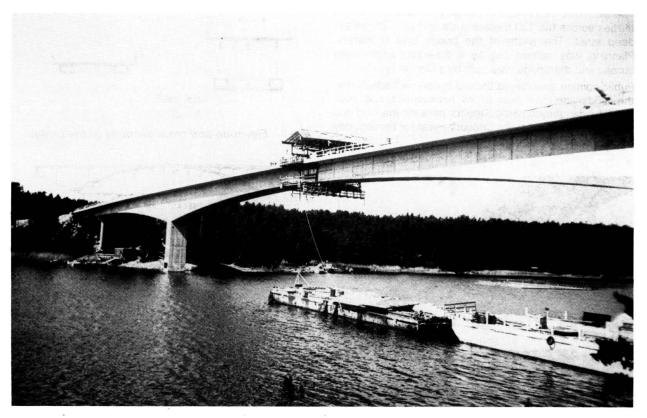


Fig. 3 The keying segment ready to be concreted in the middle of the bridge