

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 13 (1989)
Heft: C-50: Recent structures

Artikel: Bridge over the Jablanica lake Mostar (Yugoslavia)
Autor: Pržulj, M. / Tanovi, R.
DOI: <https://doi.org/10.5169/seals-21570>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 30.03.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



3. Bridge over the Jablanica Lake Mostar (Yugoslavia)

Owner: Electrical Industry Authority of B&H, Hydroelectric Power Plants on the Neretva River

Designer: Milenko Pržulj, Ph. D. C. E. Rusmir Tanović, M. Sc. C. E. Traser Co., Sarajevo

Contractors: ŽGP Contracting Company, Sarajevo Djuro Djaković Co., Slavonski Brod

Time of Construction: 18 months

Year of Completion: 1987

Material Quantities:

- Superstructure	structural steel	680 t
- Abutments	concrete	1630 m ³
	reinforcement	198 t

The following factors influenced the bridge layout:

- a selected micro-location
- morphological profile of the lake at place of bridge crossing
- high water storage level of 49.00 m and water adopted level for construction of 260 m a.s.l. which was guaranteed for three months only
- relatively favourable foundation conditions
- economic feasibility and safety of construction
- bringing contingencies and extras down to a minimum.

A bridge axis is in a straight line with a gradient of 2.2%. The bridge 6,00 + 2 × 0.75 m wide has been designed as a continuous steel girder of 20.0 + 140.0 + 20.0 m span with reinforced concrete abutments anchored in rocky slopes above the construction water level. Reinforced concrete abutments receive a couple of opposite reactions of a girder and transmit them to the ground.

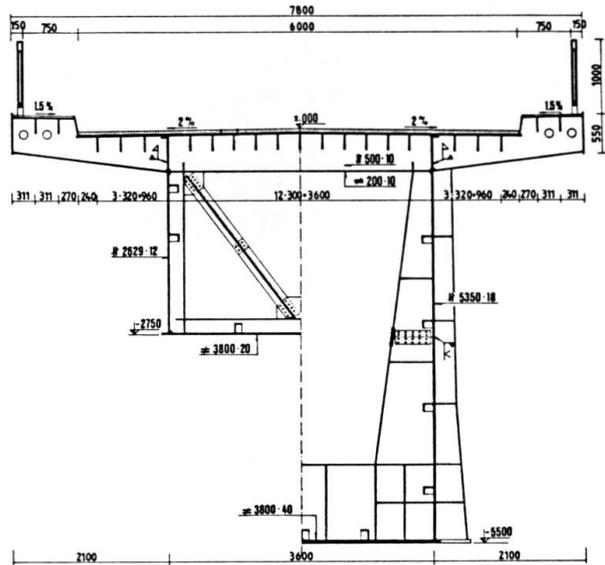


Fig. 2 Bridge cross-section

Six prestressed anchors of the GII 2500 kN (52Ø7 mm) type used for anchoring of abutments to the rock mass provide for the required stability coefficient and elimination of tensile strain in foundation joints.

Size of span, pretty low self-weight which has a positive effect on design of specific shape of abutments as well as on safety and speed of construction were determining factors for the use of steel as a structural material for a main girder. The box steel girder is of variable height ranging from 2.75 m in the middle of the interior span to 5.50 m at supports. It also exhibits required torsional rigidity during erection and use of the bridge.

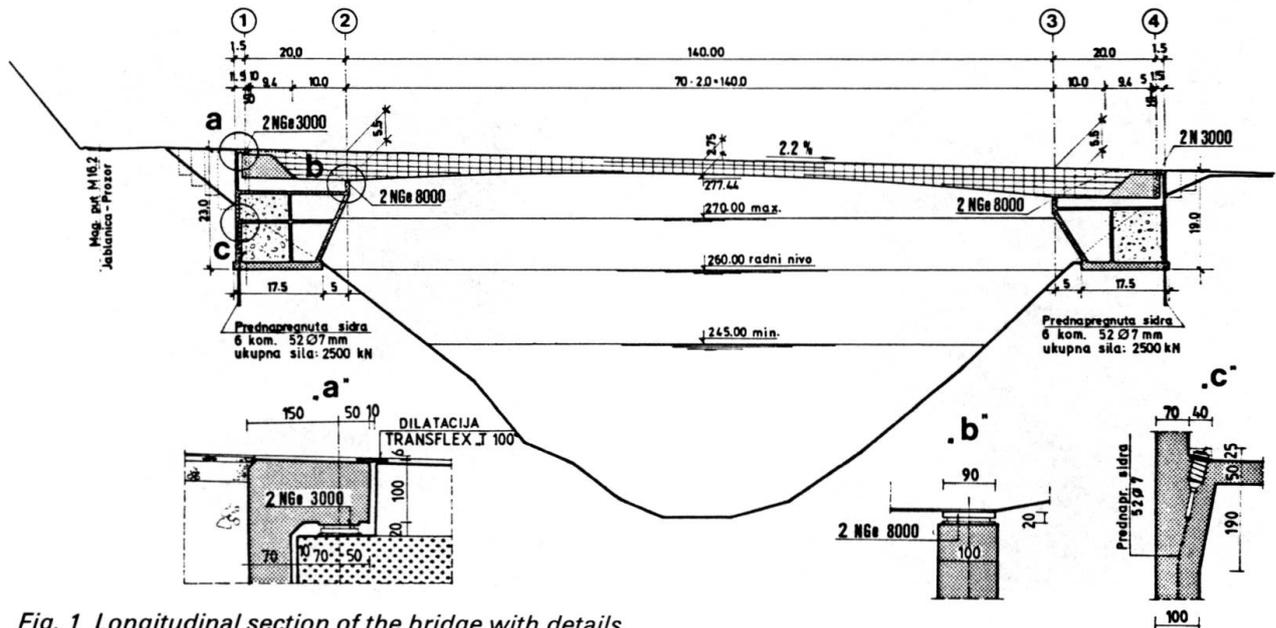


Fig. 1 Longitudinal section of the bridge with details

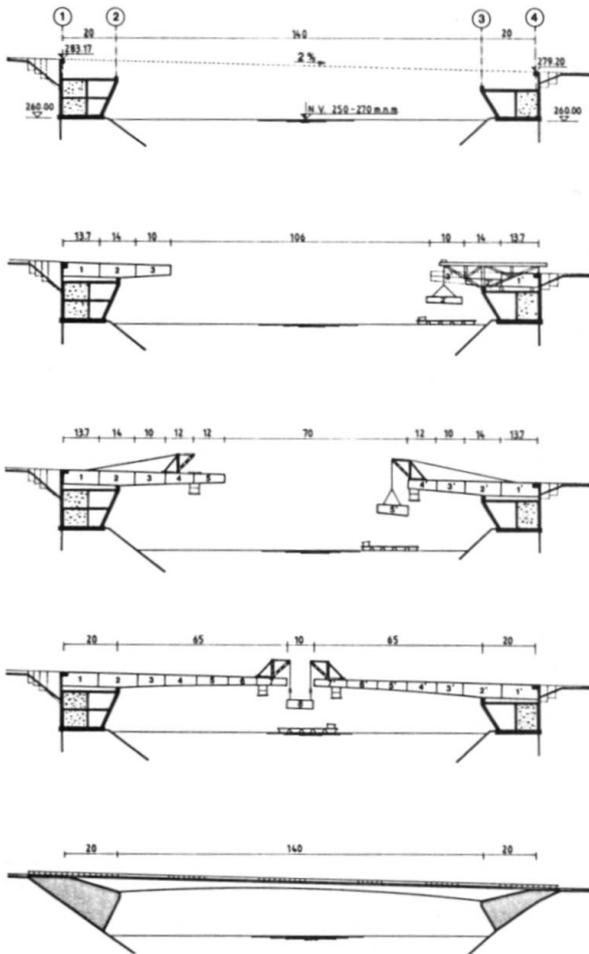


Fig. 3 Main erection stages of steel structure

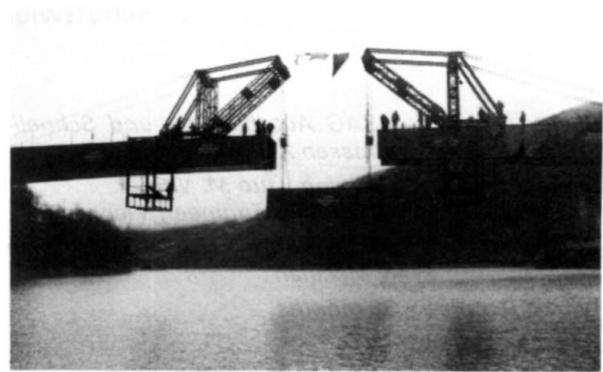


Fig. 5 View of the bridge at low water level

The structural system of the bridge is a continuous girder over three spans with a distinct interior span so that it is, in a way, a restraint beam of 140 m span. A structural analysis of structures intended for free cantilever construction is connected to design construction stages. Thus, the structural analysis of this bridge followed all stages of construction and use.

Steel structure was completely shop welded. Segments were 10.0 – 14.0 m long, 3.80 m wide and 3.70 m high. Weight ranged from 67,000 kg to 16,000 kg. Test erection was completely shop done.

Testing of the bridge was done by 11 heavy vehicles of total weight exceeding 300 t. Comparative measured and design stresses agreed well. Maximum deviations were less than 3%. Measured stresses of non-symmetrical loading showed that the total section participates in load transfer. Comparative measured and design deflections were in complete agreement.

(M. Pržulj, R. Tanović)

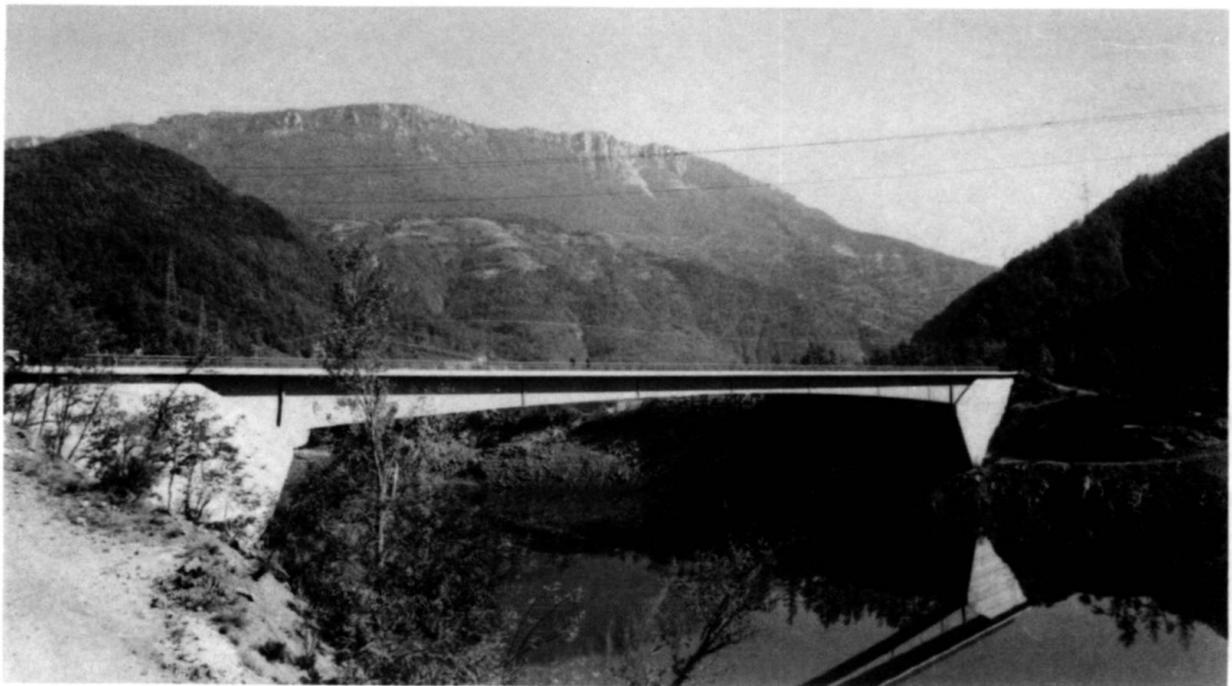


Fig. 4 Final assembly of the segment 8