

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte

Band: 60 (1990)

Artikel: Construction system for buildings with composite beams

Autor: Bonev, Angel / Partov, Doncho

DOI: <https://doi.org/10.5169/seals-46473>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 08.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Construction System for Buildings with Composite Beams

Système de construction pour les bâtiments à poutres mixtes

Bausystem für Hochbauten mit Verbundträgern

Angel BONEV

Civil Eng.
University of Sofia
Sofia, Bulgaria

Doncho PARTOV

Dr. Eng.
Glavproject
Sofia, Bulgaria

MOSK'87 constructions system applies for public and administrative buildings with the following parameters:

- structure network dimensions min 3,6/3,6 m and max 7,2/12,0 m;
- storey elevation 3,3 m to 4,8 m at intervals of 0,3 m;
- storey number from 2 to 16;
- vertical limit loads to 20 kN/m²;
- snow load to 1 kN/m²;
- horizontal forces - wind load to 0,55 kN/m², seismic degree 8 according to MSK.

The reinforced concrete core and stiff steel bonds provide spatial building rigidity. The main supporting construction represents a steel skeleton with columns hinged to collar floor beams and foundations. Storey beams and columns are fabricated of welded solid web I-elements. All the members assemble by Brown-Bovery equipment. Floor plates are prefabricated-monolithic. The mounted part represents reinforced concrete prefabricated plates thick 4 – 8 cm. Reinforced concrete plates connect to supporting beams by means of studs welded to the beams by equipment CROMPERC. MOSK'87 constructions system makes the most of personal microcomputers IBM "Super 11".

For experimental purposes were chosen the exposition hall, shop and cinema and administrative block of the pavilion "Stroitelstvo" at Plovdiv Fair. The spans of the structure in transverse and longitudinal directions are as it is shown on Fig. 1. The building is designed as hinged-frame. The connections girder-to-column, girder-to-concrete diaphragm are so designed as to bear the vertical reaction forces only (Fig. 2, 3). The overall stability of the building is ensured in both directions by cast-in-situ-diaphragms. The floor slab is of precast and cast-in-situ steel girders. First a precast concrete slab is placed upon the steel girders. It is 8 cm thick. Next a layer of 6 cm concrete is cast over the prefabricated slab. The connection between the two concrete slabs is effected by reinforcing cages. Angle-irons



are built in the precast concrete slabs. They are welded to the top webs of the steel girders. The combined behaviour of the steel girders and concrete slabs is ensured by connection studs welded to the steel girders. The studs are with diameters 18 mm and height 115 mm.

During the erection of the building the construction demonstrated the following advantages. Lower overall height of the floor construction /higher rigidity of the floor construction in vertical direction/. Greater clear spans and shorter time for construction of the precast-cast-in-situ floor slab. Warrant horizontal rigidity of the floor slab as it is erected. The floor slab functions as a horizontal diaphragm and in result the need of horizontal wind bracing is dropped. Easier accomplishment of the steel reinforcement jobs and less labour consuming construction work the need of formworks for the concrete floor slab is dropped off.

CONCLUSIONS

During the construction of the experimental project with composite beams a good experience was acquired, which showed that the reasonable application of steel and concrete in composite structures would result in saving of raw and other materials and energy.

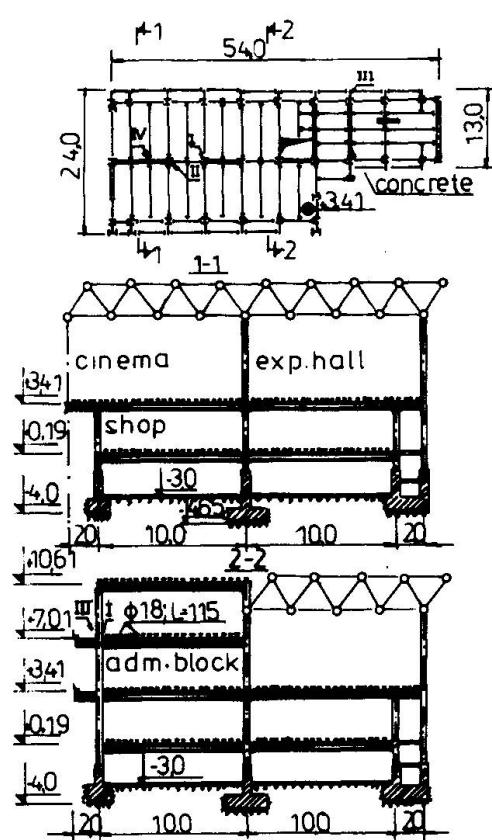


Fig. 1. Plan, Sections and Main Details

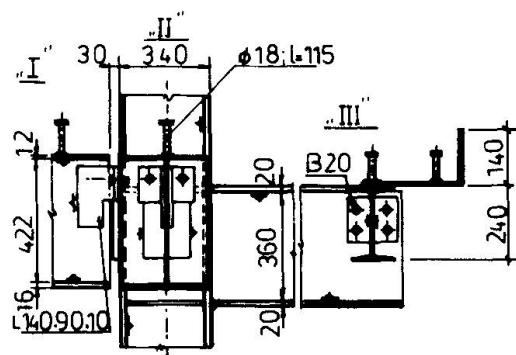


Fig. 2. Connection girders to column

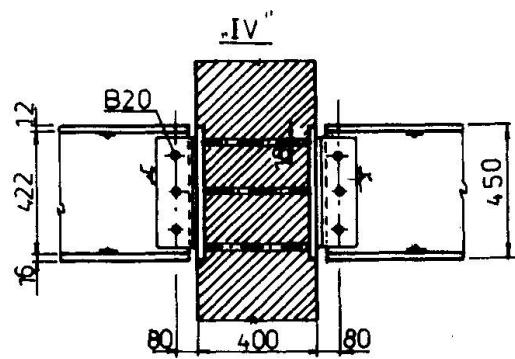


Fig. 3. Connection girders to concrete