

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 2 (1936)

Artikel: Reduction in shrinkage and expansion stresses by the systematic use
of concrete joints: application to the Philippe de Girard bridge, Paris

Autor: Ridet, J.

DOI: <https://doi.org/10.5169/seals-3273>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 16.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

II d 1

Reduction in Shrinkage and Expansion Stresses by the Systematic Use of Concrete Joints. — Application to the Philippe de Girard Bridge, Paris.

Verminderung der Wärme- und Schwindspannungen durch systematische Anwendung von Betonierungsfugen. — Anwendung für den Bau der Philippe de Girard-Brücke in Paris.

Diminution des efforts dus au retrait et à la dilatation par l'emploi systématique de reprises de bétonnage. — Application au cas du pont Philippe de Girard, à Paris.

J. Ridet,

Ingénieur en Chef Adjoint, Chemins de fer de l'Est, Paris.

The *Philippe de Girard* bridge, crossing the railway tracks outside the Gare de l'Est at Paris, consists of a concrete arch of 41 m opening (Fig. 1). The metal centring was not erected underneath the arch but inside it, and later embedded in the concrete — an arrangement that was necessary in order to allow the passage of traffic while work was in progress.

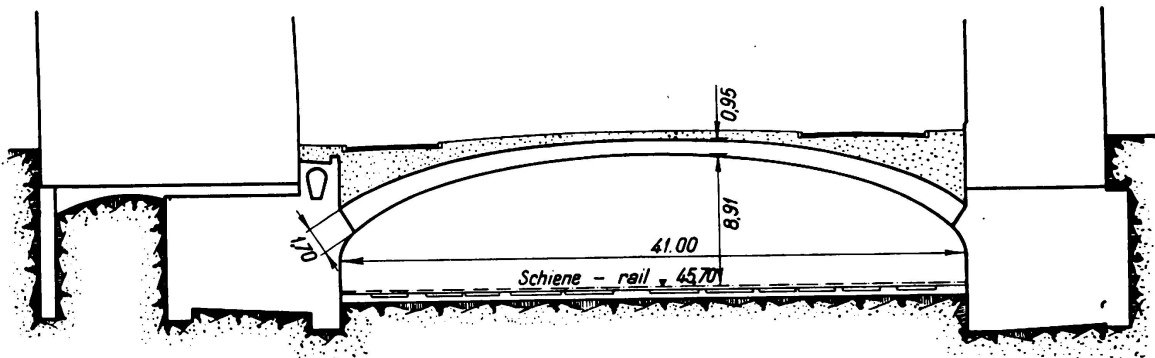


Fig. 1.

Philippe de Girard Bridge. Cross section.

The design of the arch was first attempted with due allowance for shrinkage on the assumption that the effect of this could be represented by a variation of temperature of 27° C. This implied considerable fixing moments at the springing, amounting to something of the order of 350 tonne-metres per m width of arch, and a considerable amount of reinforcement would have been necessary to resist them (Fig. 2). Such a design would have been complicated by the need

to accommodate the reinforcing bars in the spaces left free by the ribs and bracings carrying the arch (Fig. 3), and the cost of the work would have been considerably greater in consequence.

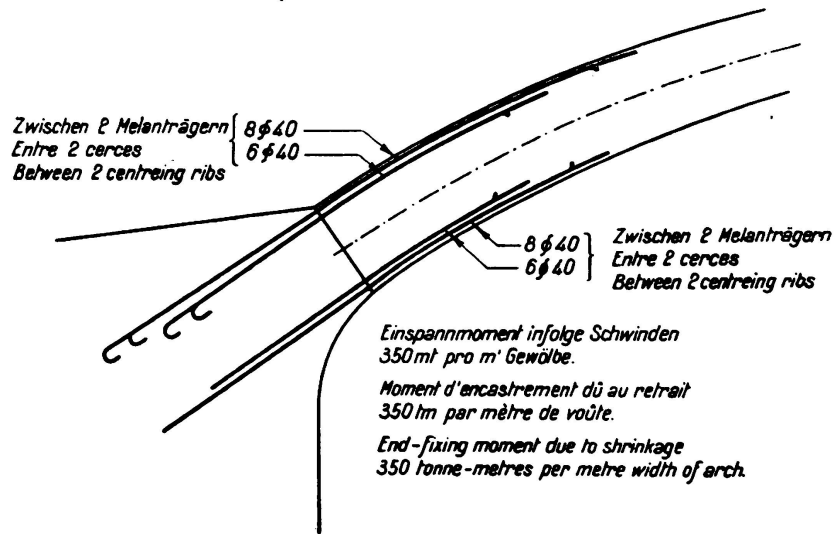


Fig. 2.
Section through haunch.

Ultimately, however, it was found possible to avoid the need for reinforcement by reducing shrinkage to a minimum, this being done by taking advantage of the fact that most of the shrinkage associated with the drying of the concrete occurs

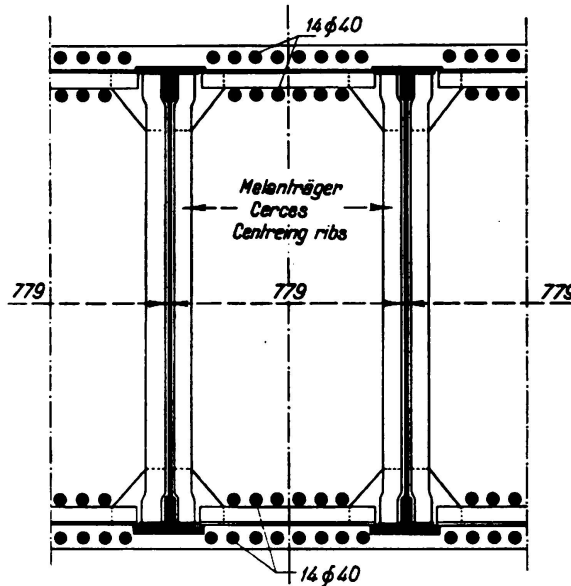


Fig. 3.
Section of arch.

when it first begins to harden: instead of pouring the whole of the arch in a continuous operation the latter was divided into voussoirs (Fig. 4), and these were concreted separately at a sufficient interval to allow of shrinkage taking place in each voussoir independently: in other words no concrete was placed in

any given voussoir until a definite time had elapsed after completing the adjacent ones, during which the greater part of the shrinkage might be assumed to have occurred.

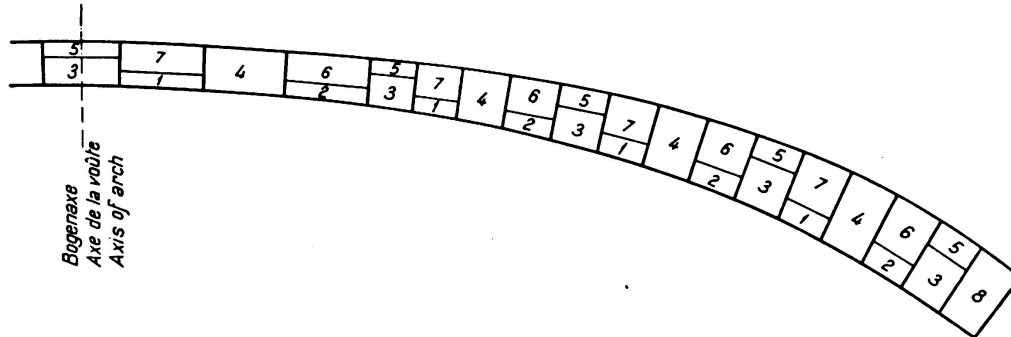


Fig. 4.

Sequence of concreting the voussoirs.

Moreover, the final closing of the arch at the haunches was delayed until the last voussoir was old enough to justify the assumption that its shrinkage had been practically finished.

By suitably planning the sequence of concreting on these lines it becomes possible considerably to reduce the effects of shrinkage, to lighten the construction, and to reduce its cost.