

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 2 (1936)

**Artikel:** A new system of suspension bridges

**Autor:** Krivochéine, G.

**DOI:** <https://doi.org/10.5169/seals-3330>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 07.03.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

A New System of Suspension Bridges.

Neues System für Hängebrücken.

Un nouveau système de ponts suspendus.

Prof. G. Krivochéine,  
Ingenieur, General-Major, Prag.

The object of the system of suspension bridge construction now to be described is to reduce the horizontal tension in the cables and consequently the weight of the bridge. The system consists of a cable of which the horizontal tension is taken up not by stiffening girders, but by a polygonal arch (Figs. 1, 2 and 3), the

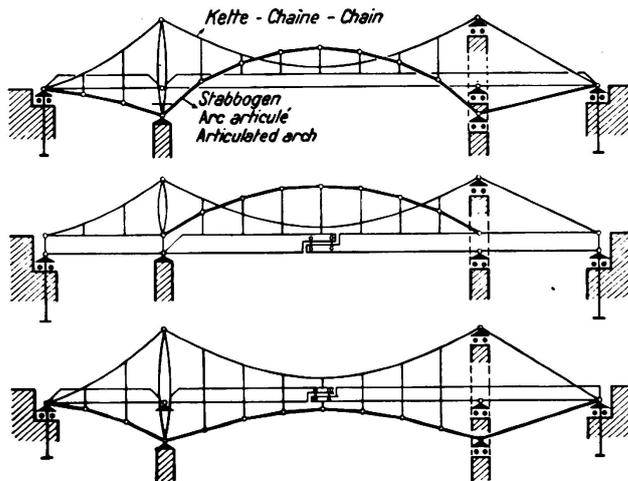


Fig 1—3.

stiffening girders serving merely to resist bending moments. The proposed system can be carried out in a statically determinate form (Fig. 4a), in which case there are two hinges in the side opening and one hinge capable of longitudinal displacement in the central opening; after the bridge is erected all three hinges, or the central hinge alone, can be eliminated, in which case the central hinge should be constructed in such a way as to be able to carry only bending moments without transmitting lon-

gitudinal forces (Fig. 4d). The system would then be statically indeterminate in one or three degrees.

For the statically determinate system (Fig. 4a) the horizontal tension of the cable can be calculated from the conditions of equilibrium of the left hand portion as indicated in Fig. 4b, and of the left half of the main girder (Fig. 4c):

1.  $H_1 = H_2 = H,$
2.  $+ C (l_0 - c) + H z_1 = 0,$
3.  $+ C \left( l_0 + \frac{1}{2} l \right) + A \cdot \frac{1}{2} l - H z_2 = 0,$
4.  $C + A = \frac{1}{2} P.$

If the hinge G lies on the line CA, we have

$$H = P \frac{l}{4(f_1 + f_2)}$$

The simple suspension bridge with the horizontal tension eliminated gives

$$H_1 = P \frac{l}{4f_1}$$

$$H = \frac{1}{2} H_1 \text{ and if } f_1 = f_2.$$

In other words, the horizontal tension in the cable of the proposed type of suspension bridge combined with an arch is only half as great as the correspon-

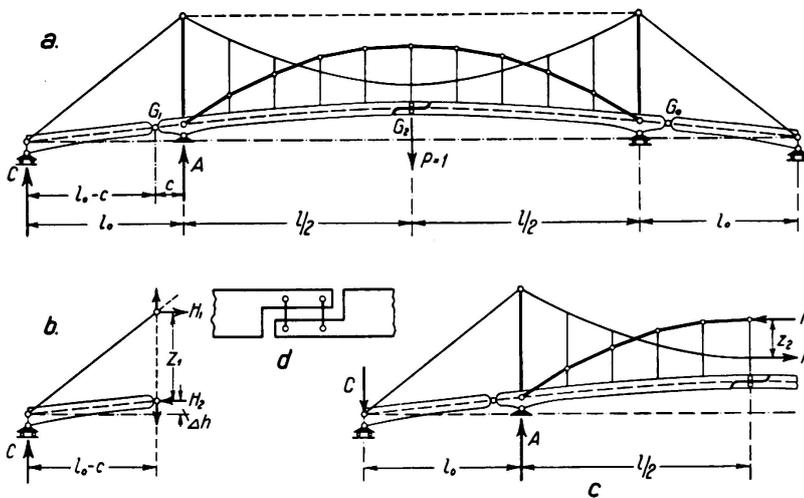


Fig. 4.

ding tension in a suspension bridge with a stiffening girder alone. In this fact lies the principal characteristic of the proposed system, which results in great economy.

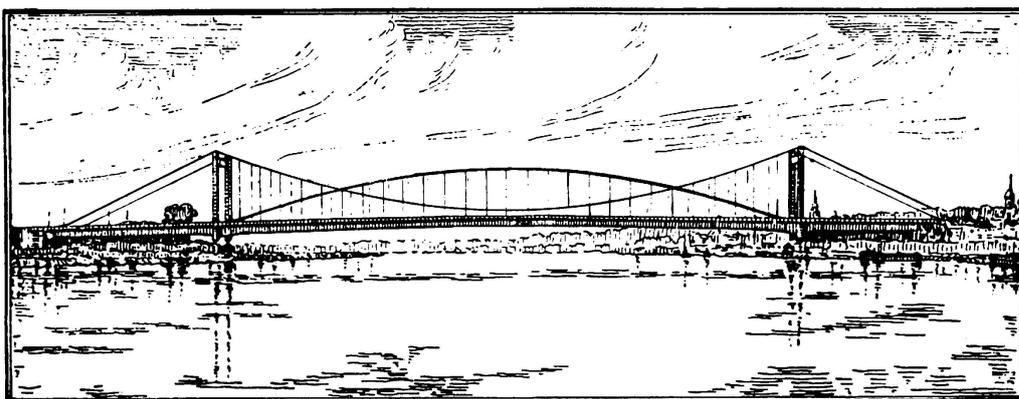


Fig. 5.

Design for a suspension bridge with unstiffened arch, at Cologne-Mülheim, on the system of Professor G. G. Krivochéine.

For instance, for the Rhine bridge at Cologne-Mülheim, having a central span of 315 m as shown in Fig. 5, this system would realise an economy of one million RM, that is 20 %.

The system has been suggested by the author:

- 1) In the competition for the design for the road bridge over the Elbe at Bodenbach-Tetschen in Czechoslovakia ( $l = 118$  m).
- 2) For the road bridge over the Elbe in Aussig, Czechoslovakia ( $l = 124$  m).
- 3) In the competition for the design of the railway and road bridge in Porto-Novo, Dahomey, Africa ( $l = 169$  m) for the French cable works of Leinekugel-le-Cocq. (Etablissements Metallurgiques, Corrèze.)

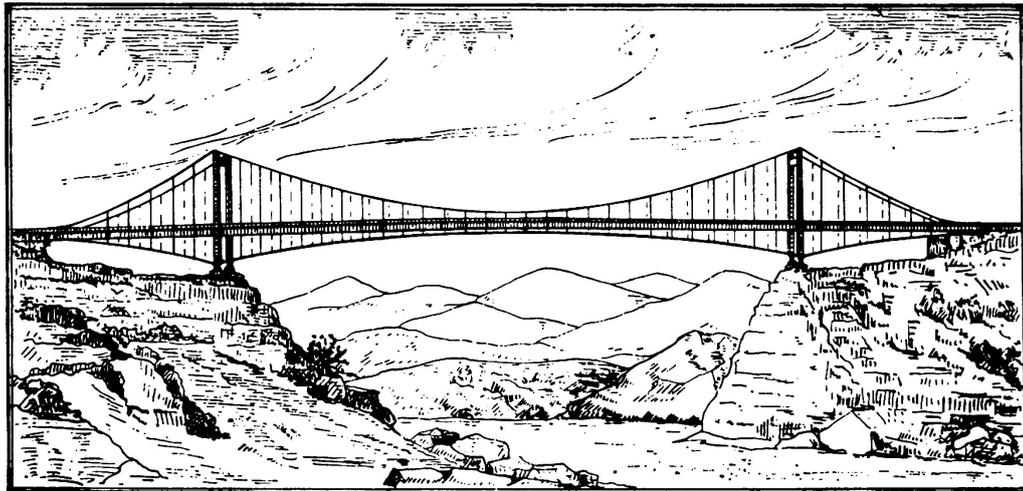


Fig. 6.

Suspension bridge with unstiffened arch.  
System of Professor G. G. Krivochéine.

The opinion was expressed by a large German firm that the preliminary design was not satisfactory from an aesthetic point of view because the arch introduces a foreign element into the otherwise clear and pleasing appearance of the suspension bridge but Figs. 3 and 6 show sketches of suspension bridges in which the arch is placed completely below the frame, so that this criticism loses its force.