

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 8 (1968)

Artikel: Specification on multi-storey buildings and in particular on steel
structures in seismic

Autor: Giangreco, Elio

DOI: <https://doi.org/10.5169/seals-8803>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 10.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

IIIc

DISCUSSION PRÉPARÉE / VORBEREITETE DISKUSSION / PREPARED DISCUSSION

Specifications on Multi-Story Buildings and in Particular on Steel Structures in Seismic

Recommandations pour le calcul des bâtiments à plusieurs étages en zone sismique avec référence spéciale aux constructions en acier

Empfehlungen für mehrstöckige Gebäude, insbesondere für Stahltragwerke in Erdbeben-gebieten

ELIO GIANGRECO
Italy

The Convention of European Constructional Steelwork Associations has appointed a special Commission for compiling the "Recommendations" for the design of steel structures in seismic area. Such Commission, known as Commission XIII, has begun his works in 1965 and in a first stage has accurately studied all international standards on the argument by making comparison and analysing those parts that the different recommendations have in common.

On the basis of the acquired knowledges and taking into account the most recent standards, the Commission has outlined a text of recommendations with comments where the general principles of the standards have been explained and some particular cases have been treated. Numerical coefficients have also been given. The Commission has decided that buildings in seismic area can be designed only if the equivalent static forces proportional to the masses in motion through a suitable seismic coefficient are introduced. Such coefficient has been fixed on the basis of the most recent studies of seismic engineering based on the spectral analysis of earthquakes and has been considered as the product of four elementary factors: the intensity seismic factor, the foundation factor, the response factor and the masses distribution factor.

The influence of each factor has been pointed out both from a qualitative and a quantitative point of view by introducing suitable schemes and simplified formulations.

In the text have also been treated the problems of torsional actions due to seismic motions as well as the stresses due to vertical actions.

Studies for preparing a further chapter on the efficiency of connections between members both of the upper structure and of the foundation structure are going on. In examining the factors which define the seismic factor the Commission has paid a particular at

tention to the evaluation of the response coefficient of the structures. As it is known this coefficient depends on the natural period of vibration of the structure as it is shown by the spectral analysis of the earthquakes.

In the following it has been reported on some researches carried out for the evaluation of the natural period of vibration of buildings.

- Period of vibration of framed structures

Because of the difficulties of evaluating the natural period of vibration, simplified formulations have been suggested by some Authors which relate the period T to the number of floors of a building, and sometimes to its geometric and elastic characteristics.

Among the most widely used formulae, the following ones may be listed:

$$\begin{aligned} T &= 0,1 n, \\ \text{and:} \quad T &= \frac{0,05}{\sqrt{D}} H \end{aligned}$$

which are respectively used by S.E.A.O.C. standards for framed structures and structures with stiffening walls.

In the formulae above, n represents the number of floors, and H and D respectively the height and the transversal dimension of the building in feet.

It is worth writing also the formula suggested by Ifrim for plane frames:

$$T = \frac{2\pi}{\xi} \sqrt{\frac{M_o l_o^3}{E J_o}} \quad (1)$$

where M_o , l_o and J_o are respectively the base mass length and moment of inertia, E the elastic modulus of the material and ξ a parameter which depends on the number of floors and columns as well as on the masses and stiffnesses distribution on the height.

In order to check the validity of the proposed formulations some studies on the argument have been carried out in the "Istituto di Tecnica delle Costruzioni" of the University of Naples.

Firstly plane structures with or without windbracing have been considered; secondly a dynamic analysis of three dimensional frames has been undertaken.

1) - Plane structures

For plane structures a sistematic theoretic study has been carried out by releasing all simplifying hypothesis formulated in the papers dealing with the argument. In fact either the possibility of joints to rotate and the inertial forces acting on each beam have been taken into account. The latter circumstance requires an iterative process if the elastic characteristics vary with the period of vibration.

If a value of the lowest frequency is fixed (in particular it has been assumed the value corresponding to infinitely rigid beams and weightless columns hypothesis) it is possible to calculate the functions rectifying the elastic characteristics of all rods. Next

a unit displacement is given to all the joints of the structure, one per time, and the structure is solved each time. Then the matrix of the reactions of fictitious supports is obtained.

As it is known the n eigenvalues are proportional to the n squares of natural vibration of the structure. Comparing the lowest of the eigen values with the one fixed, a new iteration process can be carried out assuming the new frequency as starting value.

The investigation has been extended to frames with a number of floors ranging from 2 and 24, and with a number of spans m between 1 and 14.

In a first stage frames with fixed joints and without windbracing have been considered; then the analysis for braced structures has been formulated. With regard to common frames the fundamental period of vibration depends obviously on the number of floors and spans as well as on the variation law of moments of inertia on the height of the frame, on the inertia of beams and on the mass of all rods. The analysis of design characteristics of several steel buildings has suggested some variation laws of the cross section of columns with the height and consequently of their masses. With regard to beams the variation of their moment of inertia with the height does not seem to seriously influence the value of the period of vibration.

Using the Computer it has been possible to calculate the frequencies of vibration of a large number of frames whose geometric characteristics range as stated before. Besides it has been tried to find a variation law of the unknown parameter as function of the data.

With regard to unbraced frames the following expression has been obtained for the period of vibration:

$$T = 2 \pi l_0^2 \sqrt{\frac{\mu_0}{E J_n}} T' \quad (2)$$

where l_0 is average height of columns, J_n the moment of inertia of the columns of the last floor, μ_0 the distributed mass of the beam.

The quantity T' given by graphs on fig. 1 and 2 for 1 and 14 spanned frames respectively, can be expressed by:

$$T' = 0,31 + f(\alpha) n - \frac{1,3 m^3}{10^m}$$

where n is the number of floors, m the number of spans and $f(\alpha)$ is related to the variation law of moments of inertia of columns with the height of the frame through the expression:

$$\frac{J_i}{J_n} = \alpha (n-i) + 1 \quad (3)$$

Obviously if the behaviour of the J_i/J_n is not linear a suitable value for α has to be chosen which is able to better approximate the exact curve. Function $f(\alpha)$ is shown in fig.3.

With regard to the variation laws of moments of inertia 3 and 4 in fig. 1 and 2 some comparison have been made with the formula sug

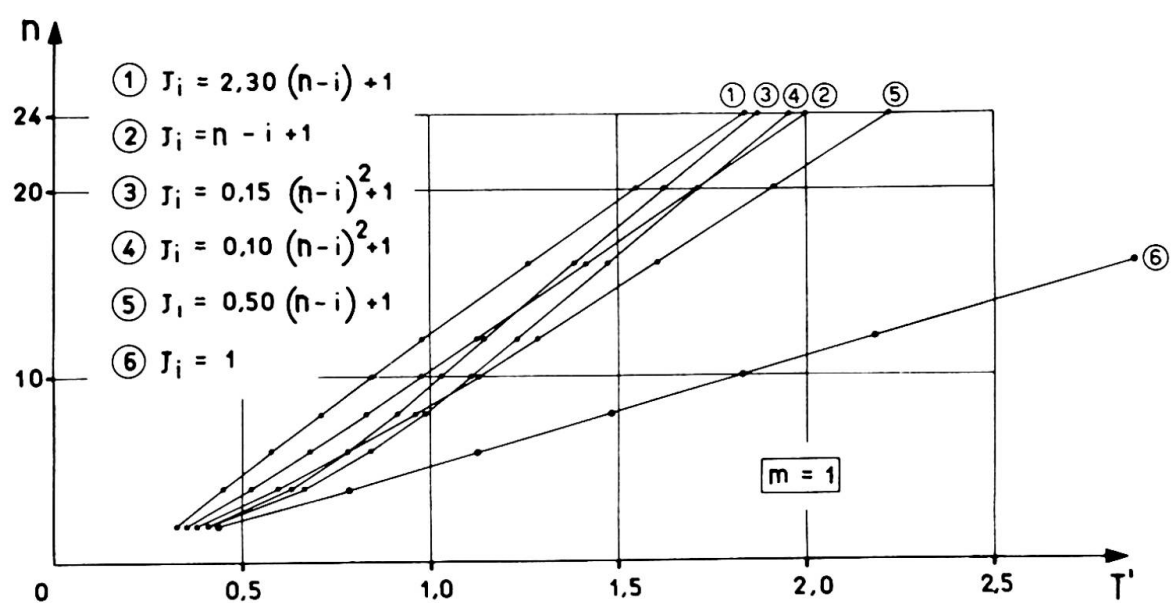


Fig. 1

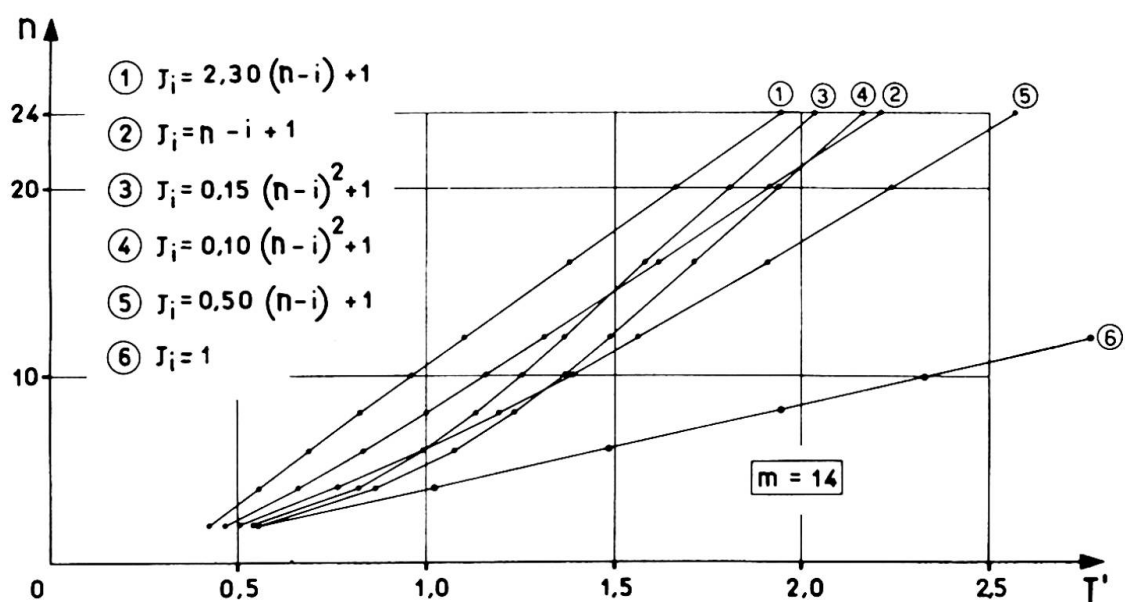


Fig. 2

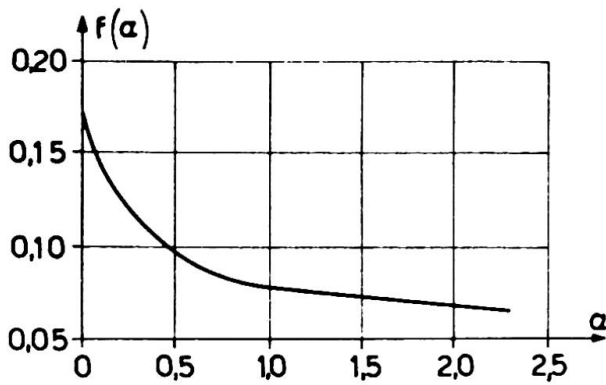


Fig. 3

gested by Housner and Brady:

$$T = 1,08 \sqrt{n} - 0,86$$

and with that one by Ibrim (1) previously mentioned (fig.4 and 5).

In the same graphs concerning 1 and 14 spanned frames, both the values obtained through calculations and those derived by using (2) are shown. Finally a qualitative graph shows what one might obtain if beams were infinitely rigid.

Later the investigation has been extended to braced frames with beams arranged according to "St. Andrew's Cross". It is assumed that beams are weightless and so slender that cannot absorb any thrust.

The procedure which has been followed is practically the same of that for ordinary frames. The difference consists in the fact that the matrix of stiffnesses of which are sought the eigenvalues is obtained as summation of two distinct matrices: the first one concerning the rods of structures and derived as before; the second one regarding the rods of bracing. The latter is tridiagonal because is independent on the rotation of joints and is invariant during calculations iterations. Such matrix can be immediately calculated and depends on the cross section area of rods as well as on the geometric dimensions of the mesh.

Introducing the equivalent moment of inertia:

$$J_e = \frac{A l^2 \sin^3 \phi}{12}$$

where:

A is the area of cross section of bracing rod;

l the width of the mesh;

ϕ the slope of bracing rods with respect to the horizontal, one has that the second stiffnesses matrix looks formally the same than that relative to frames with infinitely rigid beams.

Also in this stage several numerical examples have been carried out. Investigations have been performed on 1 to 14 spanned frames and with number of floors ranging from 2 to 24. Besides different variation laws of the moment of inertia on the height of the building and different stiffness ratios have been considered.

From the analysis of the results it seems still possible to apply the (2) if J_n is replaced by the fictitious moment of inertia

$$\bar{J}_n = J_n + \frac{\sum J_{e,n}}{m+1}$$

$\sum J_{e,n}$ is relative to the equivalent moments of inertia of all bracing rods of the last floor.

Similarly the parameter α will be still defined through the (3) where J_i and J_n must be replaced by \bar{J}_i and \bar{J}_n . In such a way the equivalent moment of inertia of bracing rods has been "distributed" to all the columns at each floor, making still valid the (2).

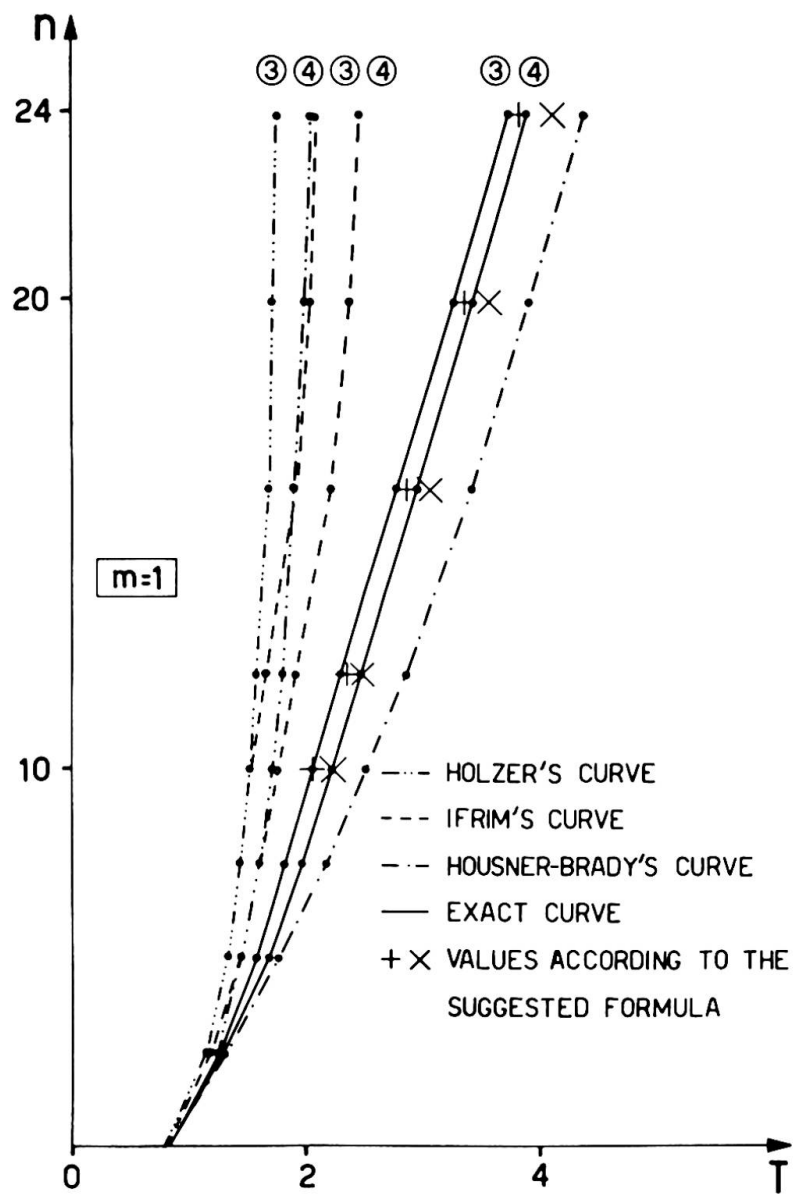


Fig. 4

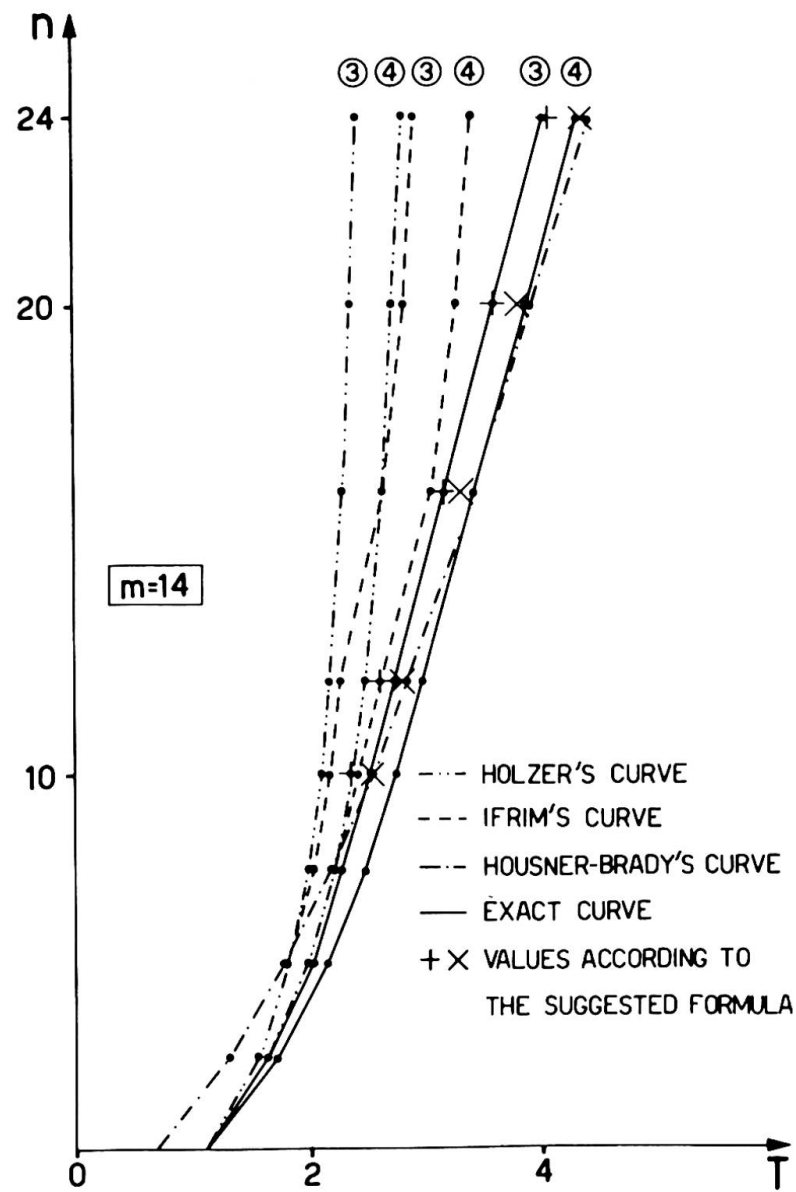


Fig. 5

Doing in this way it has been implicitly assumed that stiffness may change with joints rotation. Since this does not correspond to the real phenomenon it seems reasonable to introduce a reduction factor k . On the other hand since the ratio beams stiffness over columns stiffness increases with the number of spans, one may conclude that vibrations modes for multi-spanned frames usually exhibit smaller joints rotations. Therefore it can be predicted that factor k increases with the number of spans. Numerical results confirm this assumption giving values of k ranging from 0,65 and 1,00 for a number of spans between 1 and 14. The error is smaller than 20% also in limit cases.

In conclusion the following expression for the period of braced frames can be proposed:

$$T = 2 \pi l_0^2 \sqrt{\frac{\mu_0}{E J_n}} \sqrt{\frac{m+1}{\sum J_{m+1} + \frac{e_n}{J_n}}} \kappa T'$$

2) - Space Structures

The problem of dynamics of space frames has been set up and analyzed in a second stage of studies.

The following fundamental hypotheses have been assumed:

- a - linear elasticity of all members of structure;
- b - infinite rigidity of each horizontal structure with regard to the deformations in the plane;
- c - negligible torsional stiffness of resisting members of the structure.

Under these hypotheses for the generic space frame with n horizontal structures (such as the one shown in fig. 6) the dynamic deformed configuration is determined if the components:

$$u_i, v_i, \phi_i \quad (i = 1, 2, \dots, n)$$

for each horizontal structure are known. The u_i, v_i, ϕ_i correspond respectively to a rigid translation in the x direction, in the y direction and to a rigid rotation around the origin O of the i -th horizontal structure coinciding with its centroid.

The elastic response of the structure to a generic system of displacements and rotations given to each horizontal member can be represented therefore in the following form:

$$\begin{aligned} X_j &= \sum_{i=1}^n A_{xx,ij} u_i + \sum_{i=1}^n A_{xy,ij} v_i + \sum_{i=1}^n A_{x\phi,ij} \phi_i \\ Y_j &= \sum_{i=1}^n A_{yx,ij} u_i + \sum_{i=1}^n A_{yy,ij} v_i + \sum_{i=1}^n A_{y\phi,ij} \phi_i \\ M_j &= \sum_{i=1}^n A_{\phi x,ij} u_i + \sum_{i=1}^n A_{\phi y,ij} v_i + \sum_{i=1}^n A_{\phi\phi,ij} \phi_i \end{aligned} \quad (4)$$

where X_j , Y_j , M_j are respectively the elastic reactions in the x and y direction and the torsional reaction around 0 arising at the level of the j -th horizontal structure. The coefficients A_{ij} represent the influence coefficients of the structure, i.e. the elastic reactions at the j -th level due to displacements u_i , v_i , ϕ_i of the i -th level. They can be easily deduced if for each plane frame belonging to the space structure the reactions r_{ij} are known. Such reactions are due to the unit displacement of the generic i -th beam for all other beams prevented from translation.

In dynamics, if σ is the generic frequency of the structure in free vibrations, the displacements of the generic horizontal member turn out to be:

$$u_i = \bar{u}_i \sin \sigma t$$

$$v_i = \bar{v}_i \sin \sigma t$$

$$\phi_i = \bar{\phi}_i \sin \sigma t$$

Assumed that at each horizontal structure the mass is uniformly distributed, the inertial reactions in the x and y direction and the torsional reaction around 0 will be:

$$\begin{aligned}\bar{X}_j &= -m_j \frac{d^2 u_j}{dt^2} = m_j \sigma^2 \bar{u}_j \sin \sigma t \\ \bar{Y}_j &= -m_j \frac{d^2 v_j}{dt^2} = m_j \sigma^2 \bar{v}_j \sin \sigma t \\ \bar{M}_j &= -m_j \rho_j^2 \frac{d^2 \phi_j}{dt^2} = m_j \rho_j^2 \sigma^2 \bar{\phi}_j \sin \sigma t\end{aligned}\tag{5}$$

where m_j is the total mass of the horizontal structure and ρ_j is the polar radius of giration of its area around 0.

If columns masses are neglected, the equations of dynamic equilibrium are immediately obtained by equating (4) to (5). Setting the determinant of the coefficients of the system equal to zero one gets the algebraic equation of $3n$ degree in σ^2 whose roots $\sigma_1^2, \dots, \sigma_n^2$ allow the evaluation of the $3n$ free frequencies of the multi-story space structure.

It is obvious on the other hand that an iterative process is necessary if one wants to improve the values obtained by taking into account the mass of members. One should in fact recalculate the coefficients A_{ij} starting from the σ_i computed in the first cycle and taking into account the inertial forces of the beams and columns. Then the solution of the system of equations of dynamic equilibrium will lead to new values σ_i . The iteration process should be carried out as long as two consecutive solutions give almost the same value for the frequencies.

It should be born in mind, however, that in almost all cases the masses of horizontal structures are much larger than those ones of the columns. Consequently the values of σ_i given by the first iterative process are practically exact.

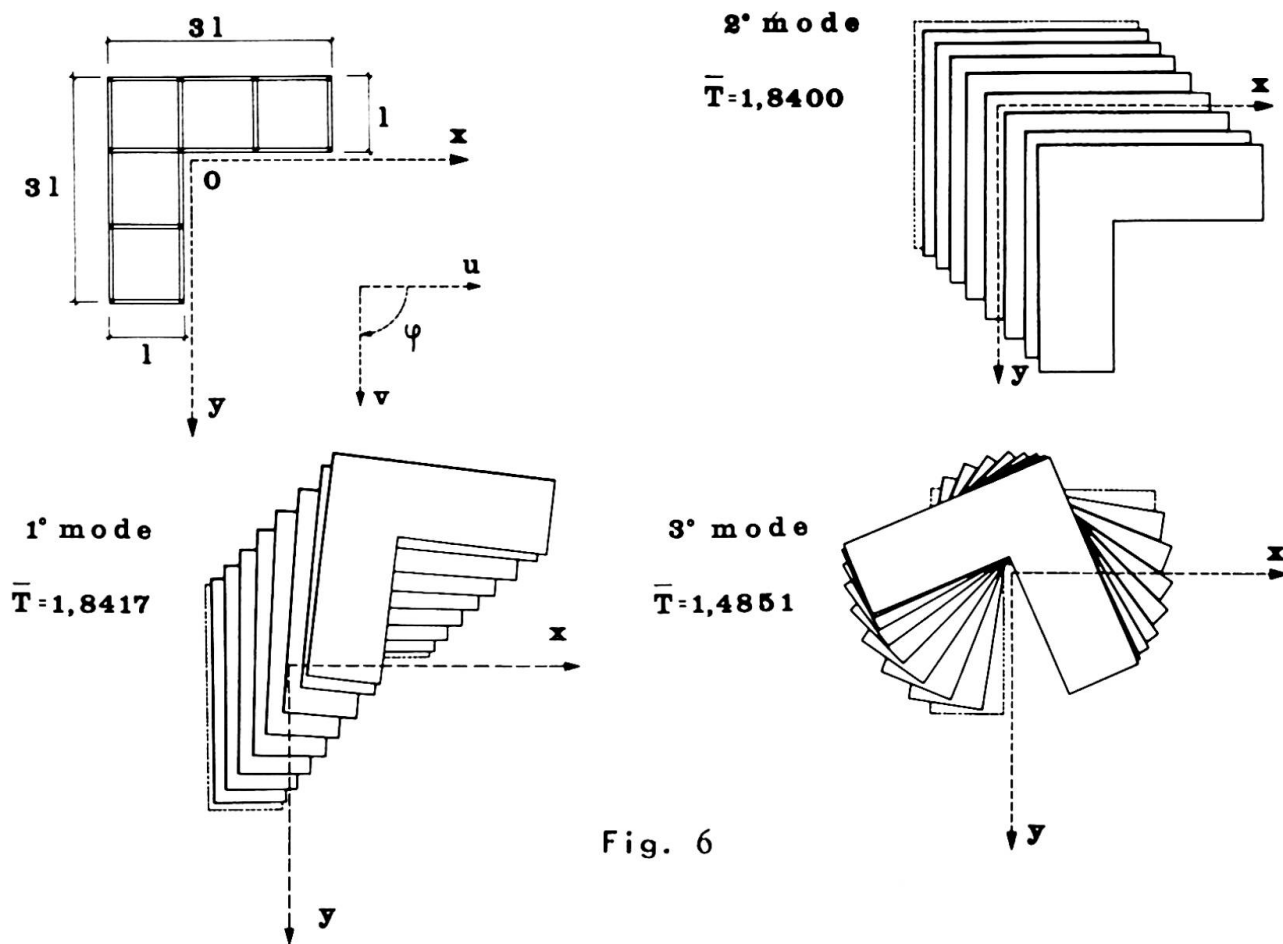


Fig. 6


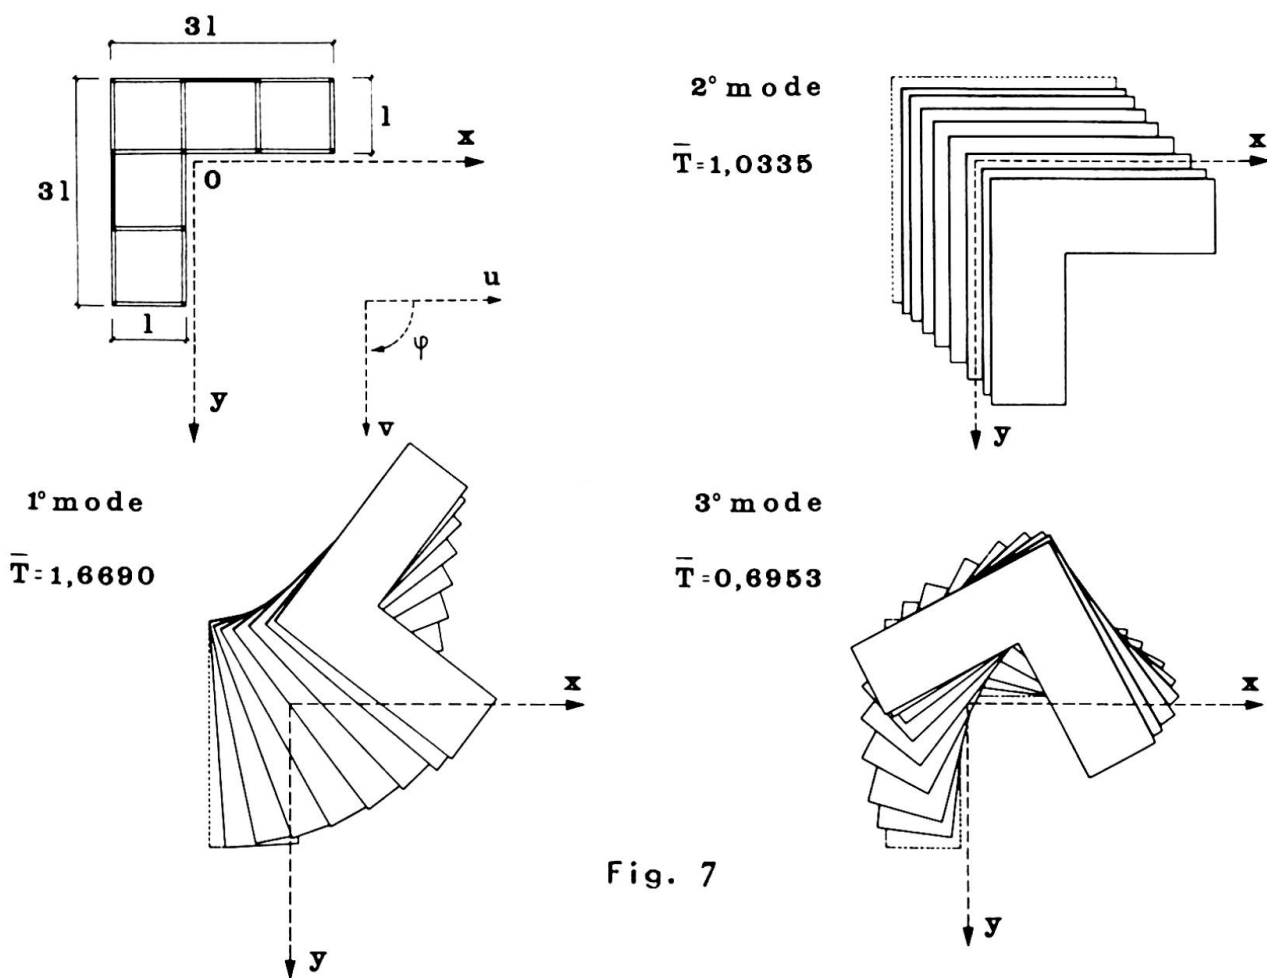


Fig. 7

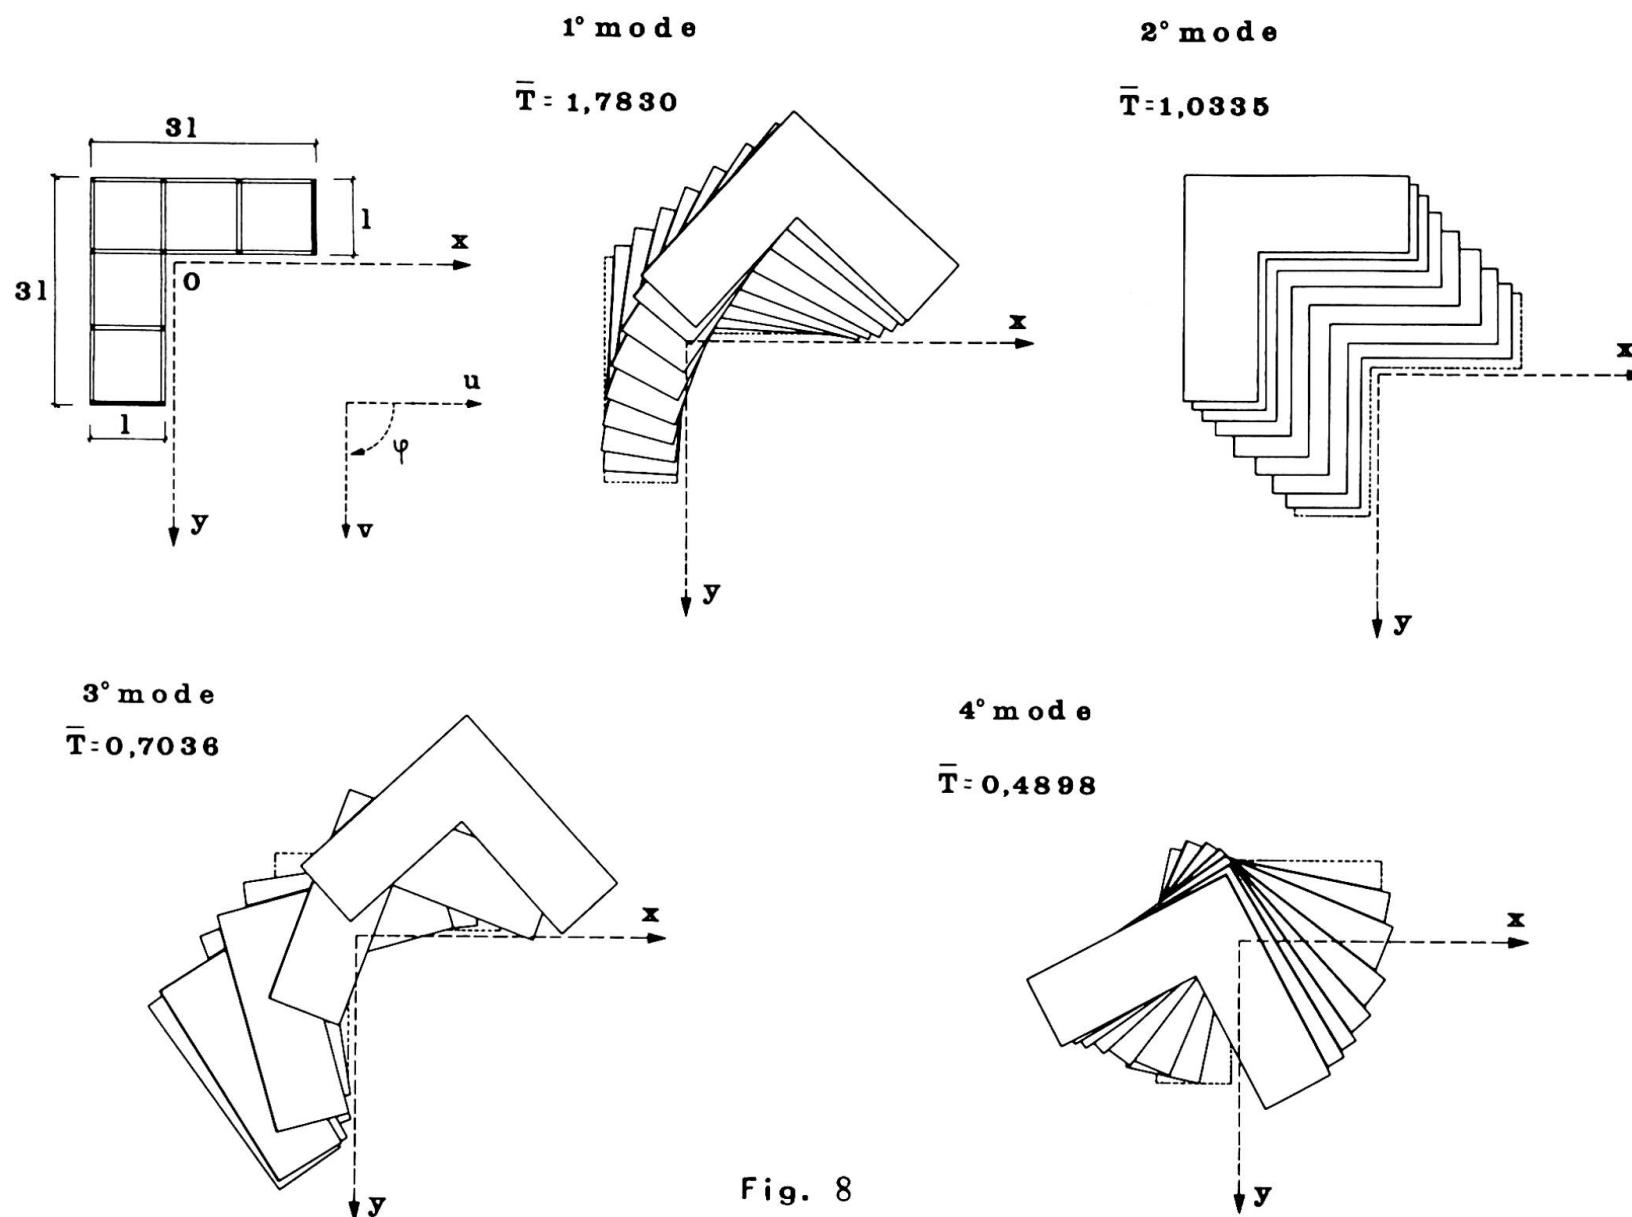

The foregoing procedure has been applied to a steel building with L plan and eight horizontal structures and with two orders of mutually orthogonal frames.

Three structural schemes of the building have been considered: the first one without windbracing (fig.6) and the other two with windbracing arranged as shown in figs. 7 and 8.

The dynamic analysis of the three space schemes has been carried out with the computer.

In the graphs previously mentioned have been represented the modes of vibration of \bar{T} related to the period T by:

$$\bar{T} = \frac{T}{\sqrt{\frac{M_o L_o^3}{E J_n}}}$$

A comparison has been made between the results obtained in this way and the other ones given by decomposing the space structure in plane frames.

It can be concluded that the period of vibration obtained in the hypotheses of plane behaviour is usually smaller than the real value.

SUMMARY

It is briefly reported on the works of the Commission XIII of the Convention of European Constructional Steelwork Associations concerning the recommendations for designing steel structures in seismic area. The results of a study on the dynamic behaviour of plane and space framed structures are also shown. Finally some simplified formulae obtained through a large numerical investigation are suggested.

RÉSUMÉ

L'article résume très brièvement les travaux de la Commission de la Convention Européenne des Associations de la Construction Métallique, concernant les recommandations pour le calcul des bâtiment dans les zones sismiques. On expose aussi les résultats d'une étude sur le comportement dynamique de structures en portique dans l'espace. On donne l'expression de formules simplifiées pour le calcul de la période de vibration.

ZUSAMMENFASSUNG

Es wird ein kurzer Abriss von der Arbeit der Kommission XIII der Europäischen Konvention der Stahlbauverbände gegeben bezüglich der Empfehlungen zur Bemessung von Stahlbauten in Erdbebengebieten. Ebenso wird eine Studie über das dynamische Verhalten ebener und räumlicher Rahmentragwerke aufgezeigt. Schliesslich werden einige vereinfachte, durch erweiterte numerische Nachforschungen erzielte Formeln für die Schwingungsdauer angegeben.

Leere Seite
Blank page
Page vide