

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 9 (1972)

**Artikel:** Cylindrical shells made of corrugated sheets

**Autor:** Abdel-Sayed, G. / El-Atrouzy, M.N.

**DOI:** <https://doi.org/10.5169/seals-9598>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 04.04.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Cylindrical Shells Made of Corrugated Sheets

Coques cylindriques en tôles nervurées

Zylinderschalen aus gerippten Blechen

G. ABDEL-SAYED

Associate Professor

M.N. EL-ATROUZY

Research Assistant

Department of Civil Engineering

University of Windsor

Windsor, Ontario, Canada

## INTRODUCTION

The advantages of using light gauge steel sheets in folded plate roofs has been established through studies and practical applications in both Canada and the U.S.A. It is also generally recognized that cylindrical shell roofs have better carrying characteristics, as they translate the applied loads into mainly membrane forces. Furthermore, corrugated sheets with cylindrical curvature are widely available and so far they are employed mainly in non-structural capacities.

This study is to establish methods of analysis and also economical applications of cylindrical shells made of corrugated sheets.

## GOVERNING DIFFERENTIAL EQUATIONS

The shells are considered as being made of elastic orthotropic material in which the mechanical properties are equal to the average properties of the corrugated sheets. For the arc-and tangent-type of corrugation, Fig. 1, these properties are [1,3]:

$$D_{\phi} = \frac{\ell}{c} t E \quad (1a)$$

$$D_x = \frac{E}{6(1-\mu^2)} \left(\frac{t}{f}\right)^2 t \quad (1b)$$

$$D_{x\phi} = \rho \frac{Et}{2(1+\mu)} \frac{c}{\ell} \quad (1c)$$

$$B_{\phi} = 0.522 E f^2 t \quad (1d)$$

$$B_x = \frac{c}{\ell} \frac{Et^3}{12(1-\mu^2)} \quad (1e)$$

$$B_{x\phi} = \frac{\ell}{c} \frac{Et^3}{12(1+\mu)} \quad (1f)$$

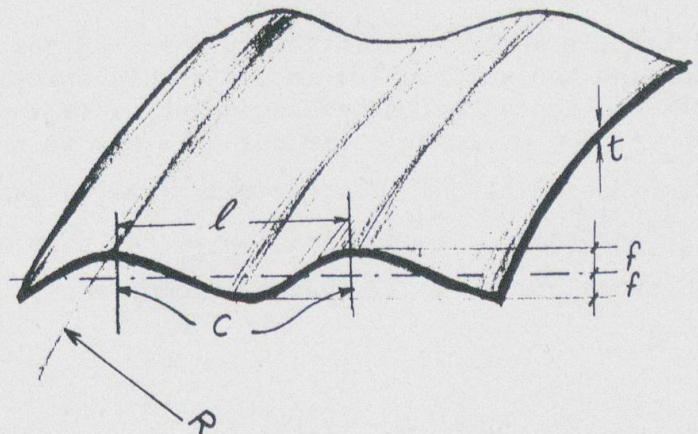


Fig. 1: Arc-and Tangent Corrugation

in which:  $D_x$  and  $D_{\phi}$  = axial rigidity

in the  $x$ - and  $\phi$  directions respectively;

$D_{x\phi}$  = shear rigidity in the  $x\phi$ -plane;  $B_x$  and  $B_{\phi}$  = bending rigidity in the  $xz$ - and  $\phi z$ -planes respectively;  $B_{x\phi}$  = torsional rigidity;  $t$  = average thickness of the sheet;

$c$  = corrugation pitch;  $\ell$  = developed length of corrugation per pitch;  $f$  = half depth of corrugation;  $E$  = modulus of elasticity of steel;  $\mu$  = Poisson's ratio; and  $\rho$  = a reduction factor to account for the effect of slip at sheet to sheet and sheet to frame connections [3].

The differential equations governing the behaviour of the shell are obtained by using the above mentioned properties together with the equilibrium conditions and geometric relationships of an infinitesimal element  $dx.Rd\phi$ . These equations are:

$$D_x \ddot{u} + \frac{B_x}{R} \ddot{w} + D_{x\phi} \left( \frac{\dot{u}}{R} + \frac{\dot{v}}{R} \right) + \frac{B_{x\phi}}{2R^3} \left( \frac{\dot{u}}{R} - \dot{w} \right) + p_x = 0 \quad (2a)$$

$$D_\phi (\ddot{v} - \dot{w}) + D_{x\phi} (R \dot{u}' + R^2 \ddot{v}) + \frac{3B_{x\phi}}{2} (\ddot{v} + \dot{w}') + p_\phi R^2 = 0 \quad (2b)$$

$$D_\phi (\dot{v} - w) - \frac{B_y}{R^2} (w + 2w + w) - (B_x R^2 \ddot{w} + B_x R \ddot{u}) - (2 B_{x\phi} \ddot{w} + B_{x\phi} \ddot{v}) - \frac{B_{x\phi}}{2R} \dot{u}' + \frac{B_{x\phi}}{2} \dot{v}' + p_z R^2 = 0 \quad (2c)$$

in which  $(\dot{\quad}) = \frac{\partial(\quad)}{\partial\phi}$ ,  $(\quad)' = \frac{\partial(\quad)}{\partial x}$ ;  $p_x$ ,  $p_\phi$  and  $p_z$  are the components of the surface (external) loading in the  $x$ -,  $\phi$ - and  $z$ - directions respectively.

The system of equations, Eqs. 2a, b, c, is derived without approximation. It encounters a number of terms which have insignificant effect on the results in shallow and/or short shells. These terms may be neglected and the system of equations is simplified as follows:

$$D_x \ddot{u} + D_{x\phi} \left( \frac{\dot{u}}{R} + \frac{\dot{v}}{R} \right) + p_x = 0 \quad (3a)$$

$$D_\phi (\ddot{v} - \dot{w}) + D_{x\phi} (R \dot{u}' + R^2 \ddot{v}) + p_\phi R^2 = 0 \quad (3b)$$

$$D_\phi (\dot{v} - w) - (B_x R^2 \ddot{w} + 2B_{x\phi} \ddot{w} + \frac{B_\phi}{R} \ddot{w}) + p_z R^2 = 0 \quad (3c)$$

#### METHOD OF SOLUTION

First, a membrane solution is obtained for the governing differential equations considering the surface loading. In this solution the boundary conditions are not satisfied. Thereafter a bending solution of the equations with no surface loading,  $p_x = p_\phi = p_z = 0$ , is superimposed in order to satisfy the boundary conditions.

A - Membrane Solution: The external load is analysed in its three components  $p_x$ ,  $p_\phi$  and  $p_z$ . As an example, a snow loading in the form of a sine wave, with maximum intensity  $p$  at the crown of the shell, has the components:

$$p_x = 0 \quad (4a)$$

$$p_\phi = \frac{-4p}{n\pi} \cos(\phi_e - \phi) \sin(\phi_e - \phi) \cos \frac{\lambda x}{R} \quad (4b)$$

$$p_z = \frac{4p}{n\pi} \cos^2(\phi_e - \phi) \cos \frac{\lambda x}{R} \quad (4c)$$

in which  $\lambda = \frac{\pi R}{L}$ ;  $L$  and  $R$  = the length and radius of curvature of the shell respectively;  $\phi_e$  = half the central angle.

The membrane solution corresponding to the given snow loading is:

$$N_x = -\frac{12p}{R\pi k^2} \cos 2(\phi_e - \phi) \cos kx \tag{5a}$$

$$N_\phi = -\frac{4pR}{\pi} \cos^2(\phi_e - \phi) \cos kx \tag{5b}$$

$$N_{x\phi} = \frac{6pL}{\pi^2} \sin 2(\phi_e - \phi) \sin kx \tag{5c}$$

$$w = \frac{12p}{\pi} \left[ \frac{1}{D_{x\phi} k^2} + \frac{4}{R^2 k^4 D_x} \right] \cos 2(\phi_e - \phi) \cos kx \tag{5d}$$

$$v = -\frac{6p}{\pi} \left[ \frac{1}{D_{x\phi} k^2} + \frac{4}{R^2 k^4 D_x} \right] \sin 2(\phi_e - \phi) \cos kx \tag{5e}$$

$$u = -\frac{12p}{Rk^3 \pi D_x} \cos 2(\phi_e - \phi) \sin kx \tag{5f}$$

in which  $k = \frac{\pi}{L}$ .

B - Bending Solution: The bending solution can be assumed as follows:

$$w = E^* e^{m\phi} \cos \frac{\lambda x}{R}, \quad u = F^* e^{m\phi} \sin \frac{\lambda x}{R}, \quad v = G^* e^{m\phi} \cos \frac{\lambda x}{R} \tag{6a,b,c}$$

in which  $E^*$ ,  $F^*$  and  $G^*$  are constants.

Eqs. 6a, b, c are substituted in the governing equations, Eqs. 2a, b, c, after replacing  $p_x$ ,  $p_\phi$  and  $p_z$  by zero. A non-trivial solution of the resulting homogeneous system of equations is governed by the following characteristic equation:

$$\begin{aligned} m^8 + m^6 \left[ 2 - \lambda^2 \left( \frac{D_x}{D_{x\phi}} + \frac{2B_{x\phi}}{B_\phi} \right) \right] + m^4 \left[ \lambda^4 \left( \frac{D_x}{D_\phi} + \frac{2D_x B_{x\phi}}{B_\phi D_{x\phi}} + \frac{B_x}{B_\phi} \right) - \lambda^2 \left( \frac{2D_x}{D_{x\phi}} + \frac{2D_\phi B_x}{D_{x\phi} B_\phi} \right) + 1 \right] \\ + m^2 \left[ -\lambda^6 \left( \frac{D_x B_x}{D_{x\phi} B_\phi} + \frac{2D_x B_{x\phi}}{D_\phi B_\phi} \right) + \lambda^4 \left( \frac{2D_x}{D_\phi} - \frac{2B_x}{B_\phi} + \frac{3D_x B_{x\phi}}{D_{x\phi} B_\phi} \right) - \lambda^2 \left( \frac{2B_{x\phi}}{B_\phi} + \frac{D_x}{D_{x\phi}} \right) \right] \\ + \left[ \lambda^8 \left( \frac{D_x B_x}{D_\phi B_\phi} \right) + \lambda^4 \left( \frac{D_x R^2}{B_\phi} + \frac{3D_x B_{x\phi}}{2D_{x\phi} B_\phi} + \frac{D_x}{D_\phi} \right) \right] = 0 \end{aligned} \tag{7}$$

A simplified characteristic equation can be obtained in a similar way by substituting Eqs. 6a, b, c in the simplified set of equations Eqs. 3a, b, c:

$$\begin{aligned} m^8 + m^6 \left[ -\lambda^2 \left( \frac{D_x}{D_{x\phi}} + \frac{2B_{x\phi}}{B_\phi} \right) \right] + m^4 \left[ \lambda^4 \left( \frac{D_x}{D_\phi} + \frac{2B_{x\phi} D_x}{B_\phi D_{x\phi}} + \frac{B_x}{B_\phi} \right) \right] \\ + m^2 \left[ -\lambda^6 \left( \frac{2B_{x\phi} D_x}{B_\phi D_\phi} + \frac{B_x D_x}{B_\phi D_{x\phi}} \right) \right] + \left[ \lambda^8 \left( \frac{D_x B_x}{D_\phi B_\phi} \right) + \lambda^4 \left( \frac{D_x R^2}{B_\phi} \right) \right] = 0 \end{aligned} \tag{8}$$

If isotropic properties are considered for the shell, Eq. 7 and Eq. 8 yield the well known characteristic equations of Flügge and Donnell respectively.

The roots of either Eq. 7 or Eq. 8 can be written as follows:

$$m = \pm \alpha_1 \pm i\beta_1 \quad \text{and} \quad m = \pm \alpha_2 \pm i\beta_2 \tag{9}$$

and the deflection, w:

$$w = \{ e^{\alpha_1 \phi} [A_n \cos \beta_1 \phi + B_n \sin \beta_1 \phi] + e^{-\alpha_1 \phi} [C_n \cos \beta_1 \phi + D_n \sin \beta_1 \phi] + e^{\alpha_2 \phi} [E_n \cos \beta_2 \phi + F_n \sin \beta_2 \phi] + e^{-\alpha_2 \phi} [G_n \cos \beta_2 \phi + H_n \sin \beta_2 \phi] \} \cos \frac{\pi}{L} x \quad (10)$$

The values of a set of roots, Eq. 9, are considered to be exact when calculated from Eq. 7 and approximate when calculated from the simplified Eq. 8. The deviations between these sets of roots increase with the increase of the ratios L/R. The average error in the 8-roots is taken as a base to determine the ratio L/R within which the simplified system of equations can be used with a reasonable degree of accuracy in the final results. Fig. 2 shows the percentage of the error versus L/R. It also shows a similar curve for the percentage of errors in the 8-roots when using the simplified equations for concrete shells (Donnell equations of isotropic shells).

The simplified Donnell equations are generally accepted for isotropic shells when  $L/R < 1.6$  [5]. Fig. 2 shows that for  $L/R < 3.9$ , the same degree of approximation is not exceeded by using the simplified equations, Eqs. 3a, b, c for shells made of corrugated sheets.

BOUNDARY CONDITIONS

Three practical types of shells are analysed:

I - shells with longitudinal stiffeners in the valleys only; II - shells with longitudinal stiffeners in valleys and crowns; III - half barrels supported along their four edges. Figs 3a, b, c show these three shells with the boundary conditions to each one of them.


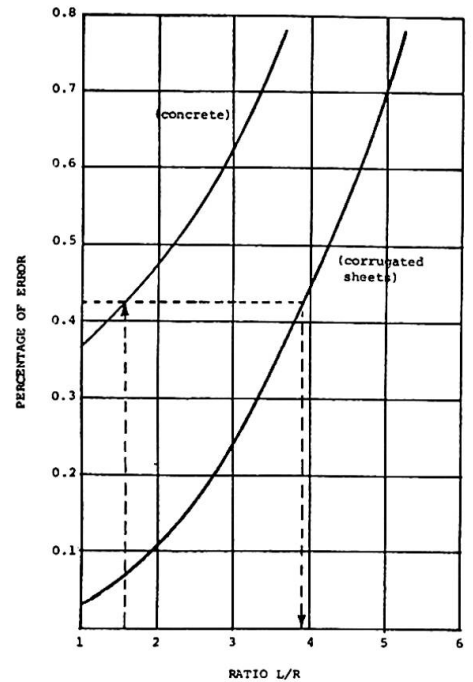


Fig. 2: Percentage of error in roots vs. the ratio L/R

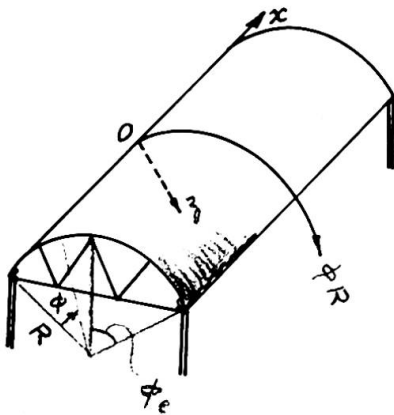

SHELL I


At  $\phi = 0$  and  $\phi = 2\phi_e$ ;

$M_\phi = 0$

$Q_\phi = 0$

$N_\phi = 0$

$\epsilon_{x,shell} = \epsilon_{x,stiffener}$

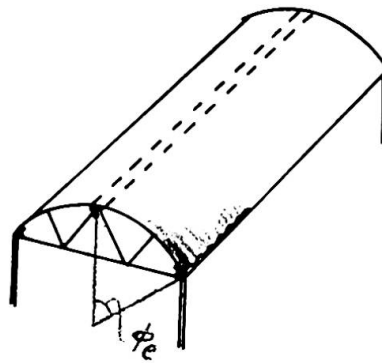

SHELL II

At  $\phi = 0$ , same as case I


At  $\phi = \phi_e$ ;

$Q_\phi = 0$

$\theta = 0$

$v = 0$

$\epsilon_{x,shell} = \epsilon_{x,stiffener}$

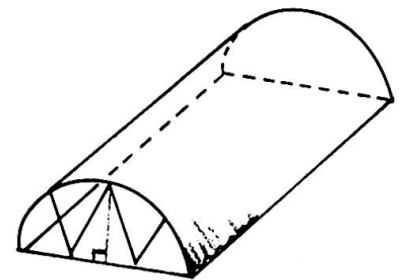

SHELL III

At  $\phi = 0$  and  $\phi = 2\phi_e$

$w = 0$

$M_\phi = 0$

$v = 0$

$\epsilon_x = 0$

Fig. 3: Types of Shells and Their Boundary Conditions

THEORETICAL RESULTS

The membrane and bending solutions are superimposed and the integration constants  $A_n, B_n, \dots$  of Eq. 10, are calculated for each type of shell satisfying the boundary conditions. In a similar way the displacements  $u$  and  $v$  are found and the components of internal forces are calculated and arranged in tables for practical use. These tables will be reported in reference [4].


COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL RESULTS

An experimental program was undertaken with full scale tests for the shells I and II, Fig. 3a, b. The experimental results show good agreement with those obtained theoretically. Fig. 4a, b, c are taken as a sample from the experimental program given in reference [4].


OBSERVATIONS AND CONCLUSIONS

1 - The theoretical analysis is verified experimentally. This proves that treating the corrugated sheets as orthotropic shells is a valid approach which adequately considers the main features of response of the shells.


2 - Design formulas and tables are prepared for practical use [4]. These formulas are based on the simplified governing equations, Eqs. 3a, b, c, which yield results with sufficient degrees of accuracy for shells with

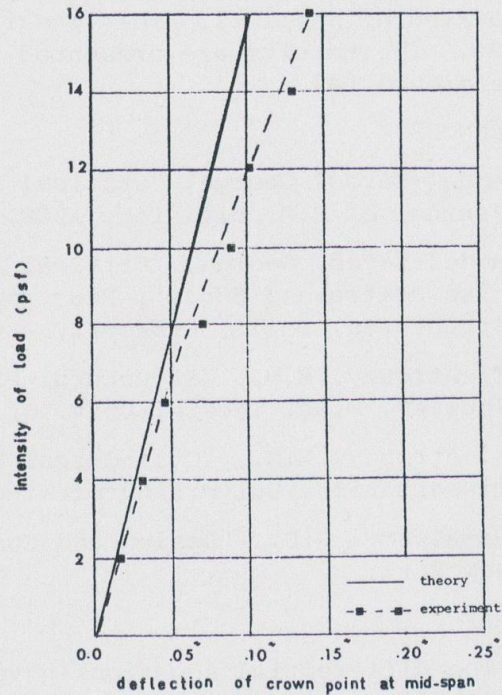

2 - COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL LOAD-DEFLECTION CURVES OF CROWN POINT AT MID-SPAN.

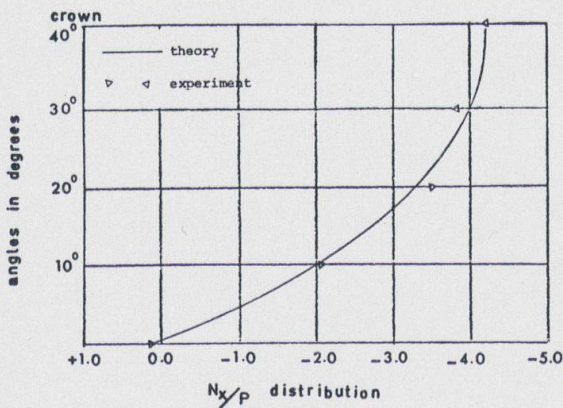

4a - COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL VALUES OF  $N_x$ -DISTRIBUTION AT MID-SPAN.

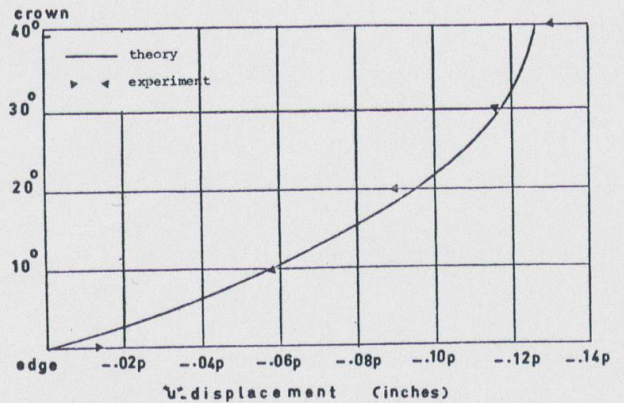

4b - COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL VALUES OF THE DISPLACEMENT  $u^*$  AT SUPPORT.

Fig. 4: Comparison Between Experimental and Theoretical Results

the ratio  $L/R \leq 3.9$ . Shells with higher  $L/R$  ratios are handled as follows: a - Shell I undergoes too large deflections and becomes of no practical use; b - Shell II can be analysed as a beam. This approach yields results that are reasonably in agreement with the present analysis when  $L/R \approx 3.5$ . Furthermore, the beam approach is expected to lead to better results for shells with higher ratios of  $L/R$ ; c - The analysis of Shell III with  $L/R > 3.9$  requires the use of the exact equations, Eq. 2a, b, c. This problem is

now under investigations.

3 - The local shear buckling is a prime factor in determining the ultimate load that can be carried by Shell II. This shear buckling was examined theoretically and experimentally [1, 2]. The results are presented in tables to supplement the design ones referred to in reference [4].

#### REFERENCES

1. Abdel-Sayed, George, "Critical Shear Loading of Curved Panels of Corrugated Sheets", Journal of E.M. Division, ASCE, Dec. 1970, pp. 895-912.
2. Abdel-Sayed, George, "Critical Shear Loading of Curved Panels of Corrugated Sheets With Restrained Edges", Proc. of the 1st Specialty Conference on Cold-Formed Steel Structures, Rolla, Missouri, Aug. 1971, pp. 167-172.
3. El-Atrouzy, M.N., "Structural Properties of Corrugated Sheets Used in Cylindrical Shells", M.Sc. Thesis, Univ. of Windsor, Windsor, Ontario, 1969.
4. El-Atrouzy, M.N., "Cylindrical Shell Roofs made of Corrugated Sheets", Ph.D. Dissertation, University of Windsor, (to be submitted in Sept. 1972).
5. Ramaswamy, G.S., "Design and Construction of Concrete Shell Roofs", McGraw-Hill, New York.

#### SUMMARY

The differential equations governing the behaviour of shells made of corrugated sheets are established in an exact as well as in a simplified form. The simplified equations yield acceptable results when the ratio of length to radius of the shell is less than 3.9. Membrane and bending solutions are superimposed to satisfy the governing equations as well as the boundary conditions.

An experimental program verified the theoretical results and showed that treating the corrugated sheets as orthotropic shells is an acceptable approach.