

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 9 (1972)

Artikel: Double-layer space frame shells

Autor: Di Tommaso, A. / La Tegola, A.

DOI: <https://doi.org/10.5169/seals-9599>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 05.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Double-Layer Space Frame Shells

Coupole à deux nappes et à treillis

Zweischichtige schalenförmige Rahmen

A. DI TOMMASO

A. LA TEGOLA

Istituto di Tecnica delle Costruzioni

Facoltà di Ingegneria

University of Naples, Italy

Introduction: The double-layer reticulated shells are being used with increasing frequency to span large areas because they are less sensitive than single-layer shells to the progressive instability. The interest in prefabricated units for these double-layer shells is growing constantly. In the first section of this paper we present some types of prefabricated units of standard size and shape for these structures. In the second section we suggest a simple procedure for evaluating the collapse-load taking into account plasticity and post-buckling behaviour for reticulated structures. This evaluation is the main requirement for a minimum-weight design.

1,1) Units of standard size for double-layer reticulated shells

Let us think a plate subdivided in elementar cubes whose edges are equal to the plate thickness t (fig. 1A). This elementar cube can be divided in five tetrahedra (this is possible in two different ways). One of these tetrahedra is regular its edges measuring $t\sqrt{2}$, (fig. 1B). Let us consider, now, as first step, instead of each cube its fundamental tetrahedron defined by the condition that two connected tetrahedra have the upper (or lower) edge perpendicular each other. As second step we substitute to the compact tetrahedron a reticulated one consisting of six bars laying along the tetrahedron edges. In this manner we have a reticulated plate structure formed by reticulated tetrahedra. Now we note that if we eliminate from the reticulated tetrahedron two bars (those corresponding to the diagonals of opposite faces in the elementar cube) we obtain four bars in the position shown in fig. 1B. This is the standard unit, with rigid joints, that we call: "standard farfalla". In the fig. 1C we show the assembling of four standard units, while in the foto 1 (top-left) it appears a specimen in which have been assembled several units.

This "standard farfalla", with some small variations, can be utilized for generating several double-curved reticulated shells. A first solution can be obtained assembling two types of farfallas

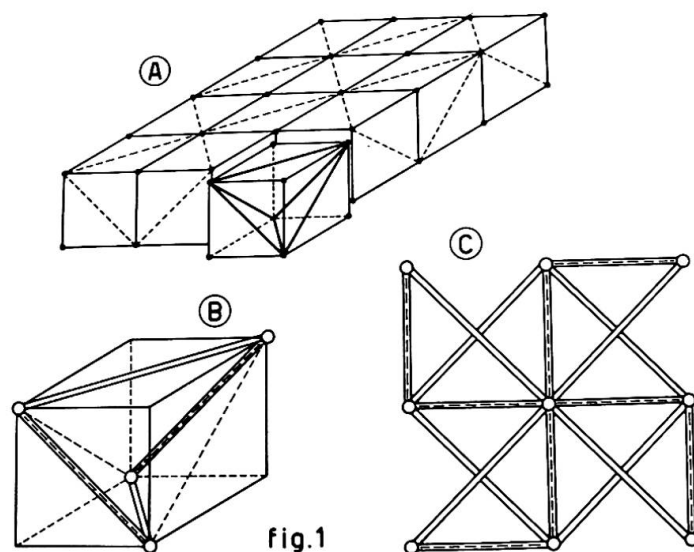


fig.1

one of which pass a bar shorter than the others, for generating double-layer cylindrical shells (foto 1 top-right).

The generation of a spherical double-curved shell starts from the truncated icosahedron inscript in a sphere (fig. 2a). This polihedron consists of 20 hexagons and 12 pentagons. Projecting the central points of these poligons on the spherical surface and connecting them with the vertexes of the corrispondent poligon, we obtain a triangulated net (fig. 2b) formed by 120+60 isosceles triangles of two types. Now we generate the double-layer spherical shell by four types of different farfallas (differents for side lenght), two of them having one side coincident with a side of two types of triangles. The other two are realized to complete the double-layer.



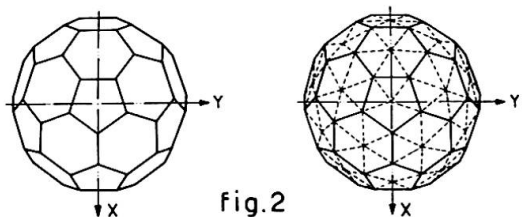


fig.2

A study for a connector of farfalla units is shown in foto 2.

II,1) Structural Analysis of reticulated structures

The main objective in the construction of reticulated structures is the employment of bars with equal section. The minimum-weight design requires the evaluation of the collapse load for a rational definition of the safety-factor. The procedures utilizing the limit-design teorems are unapplicable because these structures reach the collapse with bars in buckled configuration. Then the structural analysis must be conducted with "step by step" or "incremental" procedures. The relationship "axial force-elongation" $N-\epsilon$ (in tension and in compression) under the hypotesis of frictionless joints, represents tha basis for two approaches. The definition of this relationship is function of several parameters; this makes the practical application very arduous. For this reason it seems useful to define a simple $N-\epsilon$ law taking into account the plastic and unstable behaviour of bars.

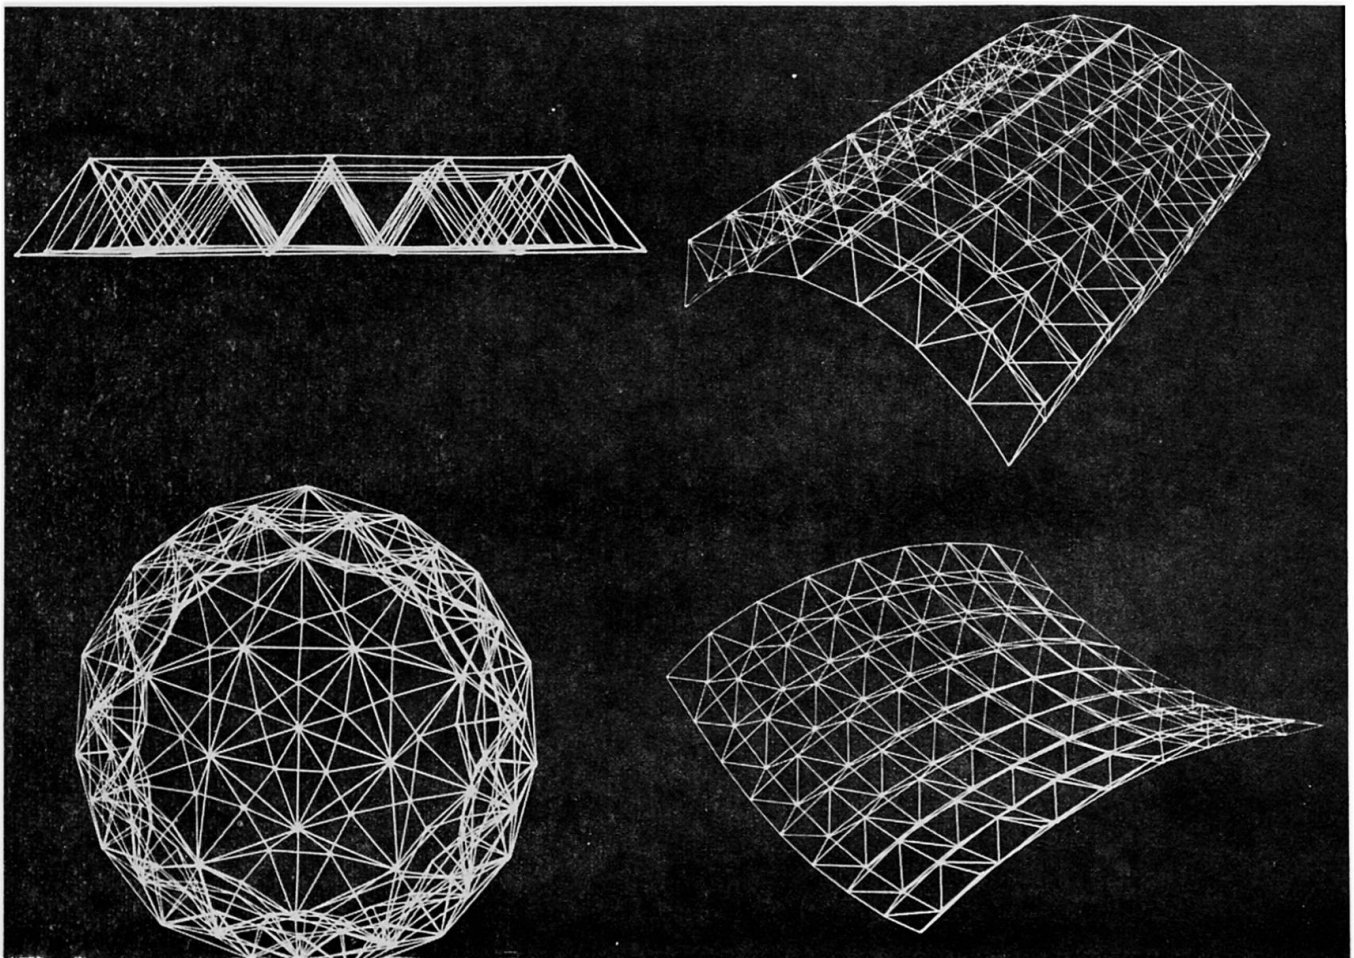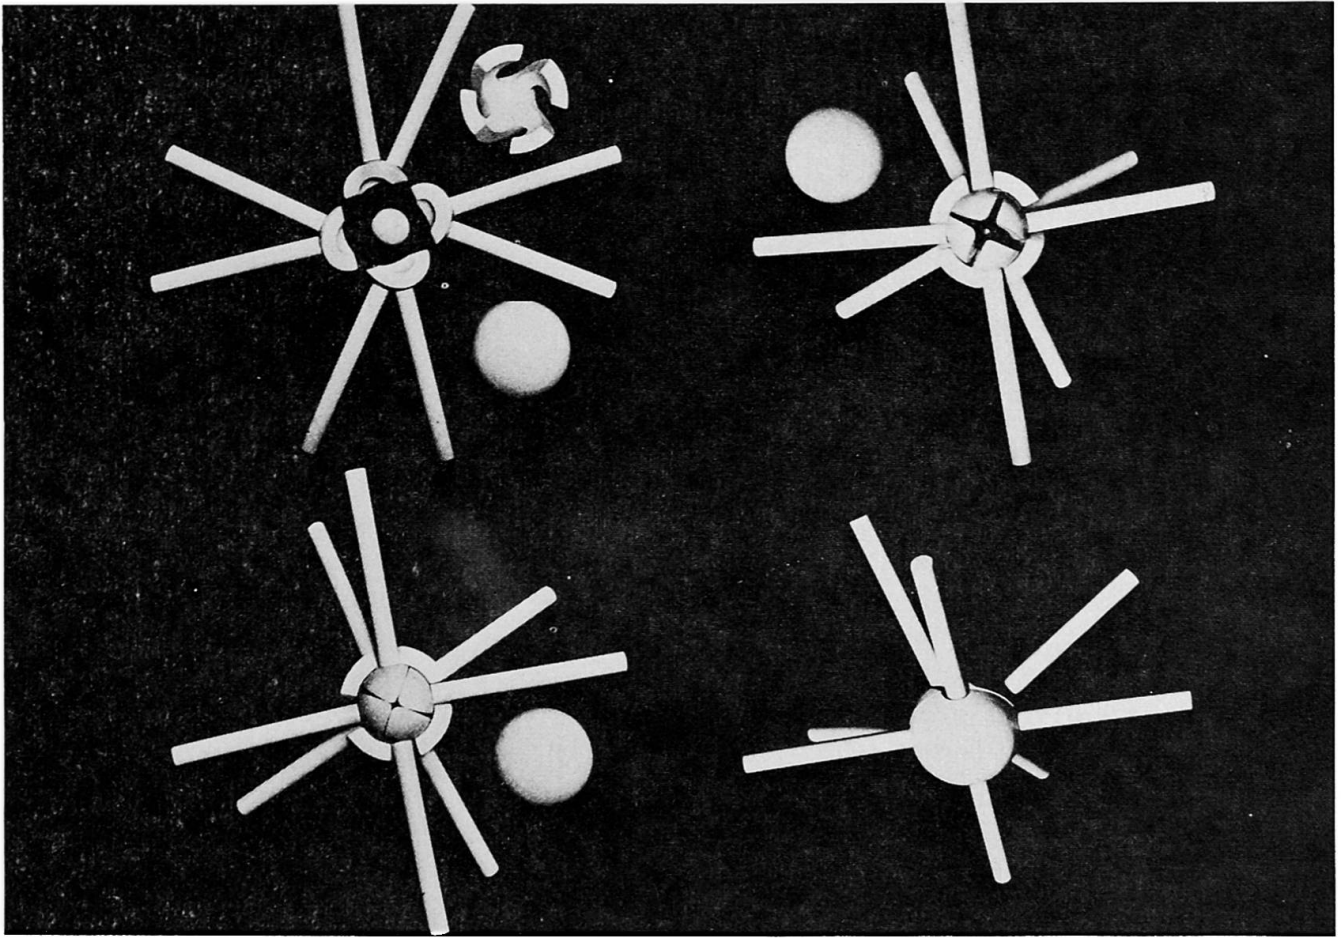

11,2) A simple N-ε relationship

Under the following hypotheses it is possible to define a simple N-ε relationship:

- a) elastic-perfectly plastic behaviour of material,
- b) bending moment-curvature with bilateral law,
- c) yield function linearized,
- d) deformability of bars localized in the middle section.

These hypotheses assure a prudent evaluation of the ultimate load. Indicating with N_0 the limit axial force in tension and with M_0 the limit bending moment, the linearized yield function is expressed by:

$$\Psi(M, N) = \pm \frac{N}{N_0} \pm \frac{M}{M_0} - 1 = 0 \tag{1}$$

For the bars in compression the buckling axial load occurs for $N = N_{cr}$ in the elastic range that is before the bar reaches the limit axial force in compression $N = -N_0$. With the position $k = N/N_0$ and $k_{cr} = N_{cr}/N_0$ we have $-1 \leq k_{cr} \leq 0$, (fig. 3). For perfectly straight bars the lateral deflection of the middle section f will be zero before k reaches the condition $k/k_{cr} = 1$. According to the linear theory of stability and


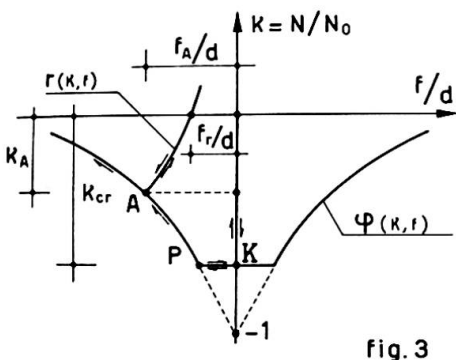


fig. 3

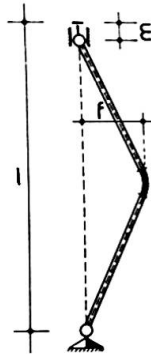

to elasto-plastic behaviour of material, the deflection f is indeterminate if $N = N_{cr}$ and $\Psi(M, N) = 0$. When $\Psi(M, N) = 0$ the deflection f is univocally determinate by (1) where we can consider $M = N f$. By putting $d = M_0/N_0$ the (1) can be written:

$$\Psi(k, f) = -k(1 \pm f/d) - 1 = 0 \tag{2}$$

that in the $(k, f/d)$ plane represents

two branches of hyperbola (fig. 3).

Following the yield line $\Psi(k, f) = 0$, an increasing deflection f requires a reduction of $|N|$. Starting from a point A on the descending k - f/d branch, for a guided deflection, it is possible a decrease of the deflection's magnitude f ; the bar behaves elastically according to the law:

$$r(k, f) = \frac{k}{k_{cr}} + \left(1 - \frac{k_A}{k_{cr}}\right) \frac{f_A}{f} - 1 = 0 \tag{3}$$

where f_A/d and k_A are the coordinates of the point A from which started the unloading process. Considering $N = 0$ that is $k = 0$ in (3), we obtain a "residual deflection" $f_r = f_A (1 - k_A/k_{cr})$. The function $r(k, f)$ represents a set of equilateral hyperbolas depending upon point A parameters, whose asymptotes are $k = k_{cr}$ and $f/d = 0$. For $A \equiv P$ (fig. 3) the hyperbola degenerates in its asymptotes. The "total elongation" is composed by two parts, the first depending on the elastic axial deformation, the second ($\Delta l/l$) depending on the lateral deflection. The relationship $f - \Delta l$, under the previous hypotheses, is $\Delta l = 2 f^2/l^2$. In fig. 4 we show the diagrams and the equations of these relationships.

In the other case, if the (5) is unsatisfied the compressed bar will reach the point P before the tension bars reach the point S. The internal force in the compressed bar must have a reduction in absolute value, while in the tension bars the force can have an increment as far as the point S will be reached. The compatibility equation (4b) allows to joint the deformation of the three bars, by putting $\varepsilon^A = -2 \varepsilon_0$ we obtain the axial force in the bar A while in tension bars the force is equal to N_0 . The limit load is:

$$F_{\ell}'' = N_0 - (-2 \varepsilon_0) N^A \quad (6)$$

If the three bars have a tubular section whose diameter is D and tickness t , indicating with λ the slenderness, we have:

$$k_{cr} = - \frac{\pi^2}{\lambda^2} \frac{1}{\varepsilon_0} ; \quad \frac{\ell}{d} = \frac{\sqrt{2}}{4} \pi \lambda \quad (7)$$

being $\lambda = \ell/\rho = 2 \sqrt{2} \ell/D$. Assuming $\varepsilon_0 = 2 \times 10^{-3}$, $\lambda = 100$ we have:

$$F_k = 0,74 N_0 ; \quad F_{\ell}'' = 1,17 N_0 ; \quad F_{\ell}''/F_k \cong 1,59$$

where F_k is the external force corresponding to compressed member instability and F_{ℓ}'' is the collapse-load.

REFERENCES

- [1] CERADINI, G. Strutture reticolari iperstatiche
Costruzioni Metalliche n° 3, 1965
- [2] DE DONATO, O. Legami forze-elongazioni per aste compresse
in fase post-critica.
Rend. Ist. Lomb. Sci. Lett. vol. 99, 1965
- [3] MAIER, G. Behaviour of elastic plastic trusses with
unstable bars. - Journal of the Engineering
Mechanics Division - ASCE vol. 93, 1966
- [4] DE DONATO, O. Legami forze-elongazioni per aste elasto-
plastiche compresse ad elongazione ^{de}crescente.
Rend. Ist. Lomb. Sci. Lett. - vol. 100, 1966
- [5] MAIER, G. Elastic-plastic continua containing unstable
DRUCKER, D.C. elements obeying normality and convexity re-
lations. - Schweizerischen Bauzeitung -
vol. 84, n° 23, 1966

SUMMARY: In this paper we show a solution for the construction of double-layer space frame shells with simple prefabricated units of standard size and shape. Then a procedure is proposed for the evaluation of the actual safety-factor by means of the calculation of the collapse-load of these structures taking into account plasticity and local buckling of simple bars.