

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 9 (1972)

**Artikel:** Minimum weight design of frameworks

**Autor:** Rao, S. Venkateswara / Dayaratnam, P.

**DOI:** <https://doi.org/10.5169/seals-9632>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 28.12.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## VII

### Minimum Weight Design of Frameworks

Projet de minimalisation de poids de charpentes

Entwurf einer Gewichtsminimalisierung bei Fachwerken

S. VENKATESWARA RAO

Research Fellow

DR. P. DAYARATNAM

Professor

Department of Civil Engineering

Indian Institute of Technology

Kanpur, India

### 1. Introduction

Full stress design is commonly adopted for design of frameworks. For a given set of joint locations  $j$ , and a system of self equilibrating loads, a framework of most general topology can have a total number of members  $m = j(j-1)/2$ . This, in general will be statically indeterminate. A feasible full stress design may or may not exist for a statically indeterminate structure [1,2]. However, full stress design of an indeterminate framework is feasible through geometrically controlled prestress [3,4]. Any such fully stressed structure may have its weight less than some determinate forms but not necessarily lower than all the feasible determinate forms of the indeterminate framework [5,6].

Least weight design for a fixed load condition is known to be statically determinate [7,8,9,10,11]. Hence the problem of Minimum weight design of a framework reduces to the identification of the least weight statically determinate form, out of the several feasible determinate forms. Present methods [8,10,11] of identifying the least weight statically determinate form use, either special mathematical tools or certain theorems of plastic design. In the present work, a direct method using wellknown principles of structural analysis is proposed.

### 2. Full Stress Design With Prestress

An initial lack of fit in a statically indeterminate system will induce prestress in the system. The forces in a statically indeterminate framework are given by

$$\{F\} = \{F^0\} + [f] \{X\} \quad \dots \dots (1)$$

in which  $\{F\}$  = element force vector;  $\{F^0\}$  = element force vector of a determinate structure;  $[f]$  = influence coefficient matrix associated with redundant forces; and  $\{X\}$  = vector of redundant member forces.

If the members are to develop preassigned stresses at working load, the compatibility of deformations requires

$$\{f\}^T [L] \{\sigma\} + E \{\lambda\} = 0 \quad . . . . (2)$$

in which  $[L]$  = diagonal matrix of member lengths;  $\{\sigma\}$  = vector of member stresses;  $E$  = youngs modulus; and  $\{\lambda\}$  = vector of initial lack of fit in redundant members. Preassigned stresses at working load of a statically admissible force system, automatically fixes the sizes of the members of the framework. It is seen from Eq. (2) that for a given set of member stresses,  $\{\lambda\}$  is unique. Thus the member forces in no load condition (only prestress condition) are fixed and can be determined. The prestress in any member is given by

$$\sigma_{Pi} = \frac{F_{Pi}}{a_i} \quad . . . . (3)$$

in which  $\sigma_{Pi}$  = prestress in the  $i$ th member due to initial lack of fit;  $F_{Pi}$  = force in the  $i$ th member in prestress condition; and  $a_i$  = cross sectional area of the  $i$ th member.

The design will be an acceptable one, if the stresses under no load condition are also within the allowable limits i.e.

$$\sigma_{Pi} \leq \sigma_{ai} \quad (i = 1, 2, \dots, m) \quad . . . (4)$$

in which  $\sigma_{ai}$  = permissible stress in  $i$ th member.

### 3. Optimal Statically Determinate Form

Prestress changes the datum level of a member capacity and in the presence of prestress the effective capacity of the member is

$$F_{ei} = F_i - F_{Pi} \quad . . . . . (5)$$

in which  $F_{ei}$  = effective capacity of the  $i$ th member at working load; and  $F_i$  = capacity of the  $i$ th member at full stress. The effective capacity of a member is increased by the presence of a compensatory type of initial prestress. Therefore, the efficiency of a member in transferring the external loads to the supports may be represented by a nondimensional factor  $\rho_i$  given by

$$\rho_i = \frac{F_{ei}}{F_i} = 1 - \frac{F_{Pi}}{F_i} \quad . . . . . (6)$$

in which  $\rho_i$  is defined as efficiency factor for the  $i$ th member. The efficiency factor can be as high as 2 for equal permissible stresses in tension and compression. The position of the member in the framework and the loading system are reflected in the efficiency

factor. Therefore, the efficiency factor  $P$  is a direct indication of the effective utility of a member for the particular load condition. The optimal statically determinate form can be obtained by eliminating the required members of least efficiency. Application of this simple logic is illustrated through examples.

#### 4. Illustrative Examples

**Example 1:** It is required to find the optimal statically determinate form corresponding to an indeterminate framework shown in Fig. 1(a). The detailed calculations for member efficiency factors are given in Table 1. Fig. 1(b) shows the variation of the volume (or weight) of truss for full stress design, with respect to force in redundant member at working load. The choice of the redundant member has no effect on the nature of this curve. The dotted lines in Fig. 1(b) indicate that the prestress in some members exceed the allowable values. The Kink points correspond to statically determinate forms of the system. The optimal topology will not get affected by adopting different allowable stresses in tension and compression. The optimal statically determinate form (point b) is obtained by removing the least efficient member 4.

Table 1. - Computations of Example 1

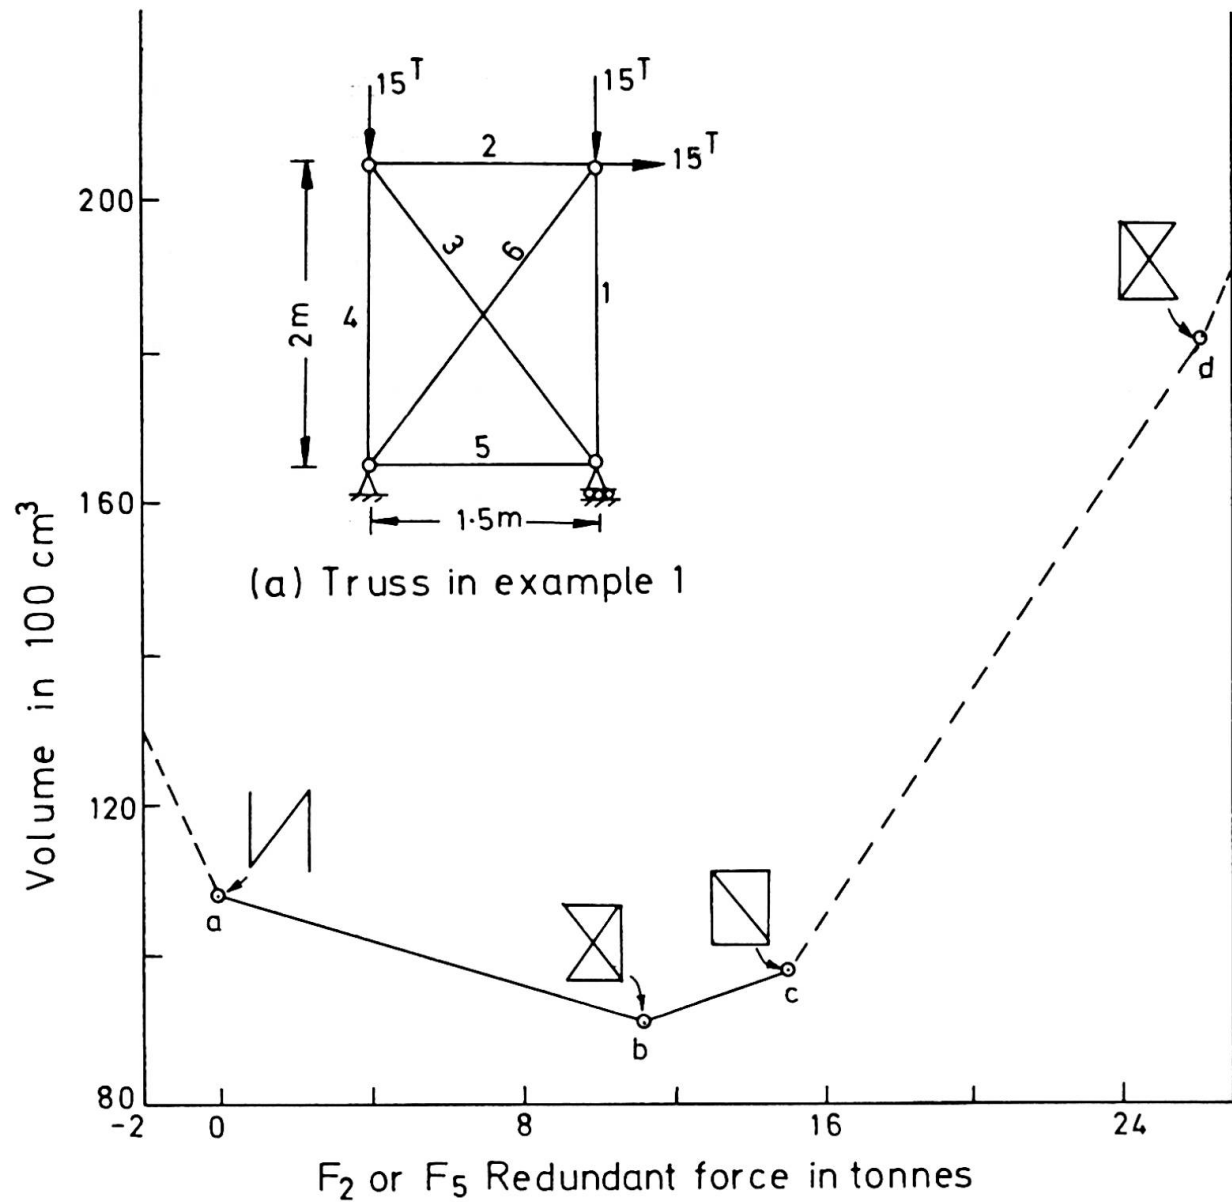
Member	$F_i^0$	$f_{ij}$	$F_i$	$a_i$	$F_{Pi}$	$\sigma_{Pi}$	$\sigma_{ai}$	$P_i$
1	2	3	4	5	6	7	8	9
1	-15.0	-0.80	-27.00	18.00	-1.354	-0.075	-1.50	0.950
2	15.0	-0.60	6.00	4.00	-1.016	-0.254	-1.50	1.169
3	-25.0	1.00	-10.00	6.67	1.693	0.254	1.50	1.169
4	5.0	-0.80	-7.00	4.67	-1.354	-0.290	-1.50	0.806*
5	15.0	-0.60	6.00	4.00	-1.016	-0.254	-1.50	1.169
6		1.00	15.00	10.00	1.693	0.169	1.50	0.887

$F_i^0$  = force in  $i$ th member due to external loading when the redundant members are removed;  $f_{ij}$  = force in  $i$ th member due to unit tensile force in the  $j$ th redundant member when the other redundant members and external loads are removed.

Units: Force in Tonnes; area in sq. cm.; and stress in Tonnes per sq. cm.

\* Least efficient member.

**Example 2:** It is required to find the optimum design of the space framework loaded as shown in Fig. 2. The calculations for the efficiency factors are listed in Table 2.



(b) Weight of truss Vs redundant force  
FIG.1 ILLUSTRATIVE EXAMPLE 1

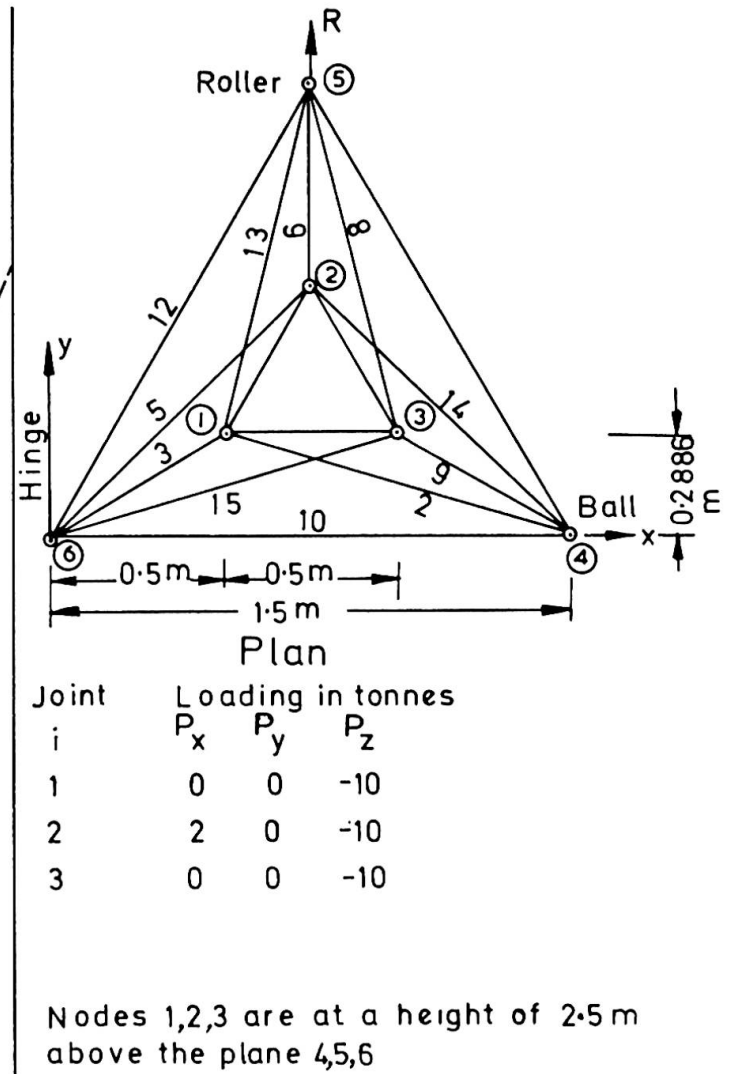


FIG.2 SPACE TRUSS-EXAMPLE-2

Table 2. - Computations of Example 2

Member	$F_i^o$	$F_i$	$a_i$	$F_{Pi}$	$\sigma_{Pi}$	$\sigma_{ai}$	$P_i$
1	2	3	4	5	6	7	8
1	-1.33	-0.22	0.150	0.063	0.419	1.50	1.279
2	0.00	-2.00	1.333	-0.114	-0.085	-1.50	0.943
3	-10.26	-4.58	3.052	0.222	0.072	1.50	1.048
4	-1.33	0.88	0.588	0.066	0.112	1.50	0.926*
5	3.61	-0.39	0.260	-0.118	-0.455	-1.50	0.696*
6	-13.68	-6.10	4.069	0.166	0.041	1.50	1.027
7	-3.33	-1.12	0.745	0.031	0.042	1.50	1.028
8	3.61	-0.39	0.259	-0.056	-0.217	-1.50	0.855*
9	-13.68	-8.00	5.333	0.161	0.030	1.50	1.020
10	1.78	2.15	1.432	0.021	0.015	1.50	0.990
11	1.78	2.52	1.677	0.010	0.006	1.50	0.996
12	2.44	3.18	2.122	0.022	0.010	1.50	0.993
13	..	-4.0	2.667	-0.118	-0.044	-1.50	0.970
14	..	-4.0	2.667	-0.056	-0.021	-1.50	0.986
15	..	-2.0	1.333	-0.114	-0.085	-1.50	0.943

Units: Force in Tonnes; area in sq. cm.; and stress in Tonnes per sq. cm.

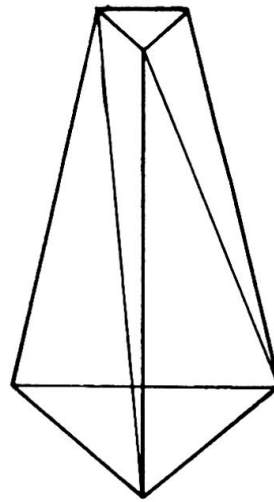
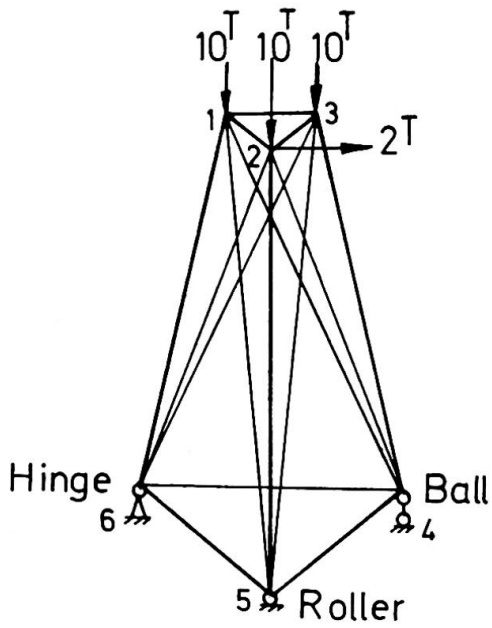
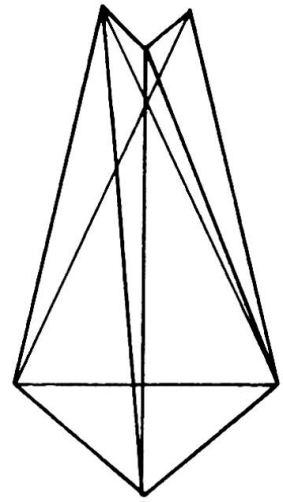
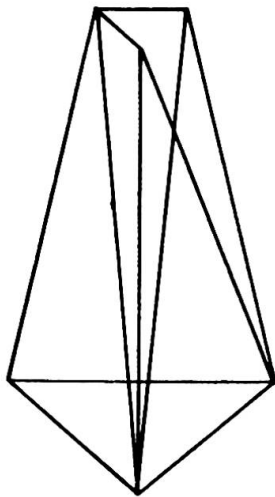
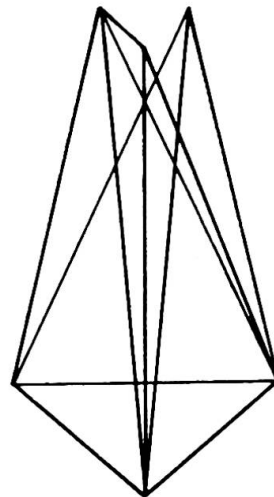
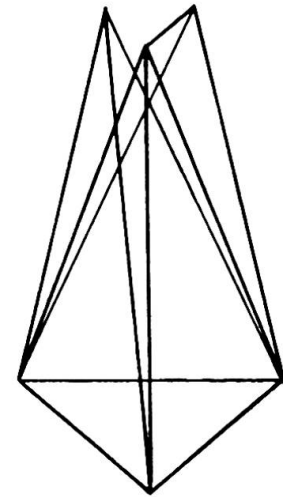
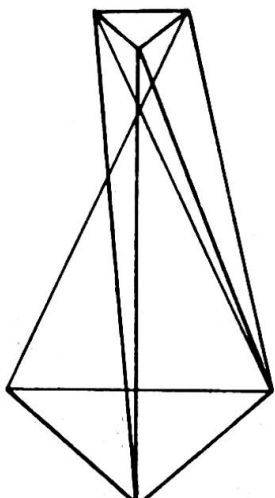
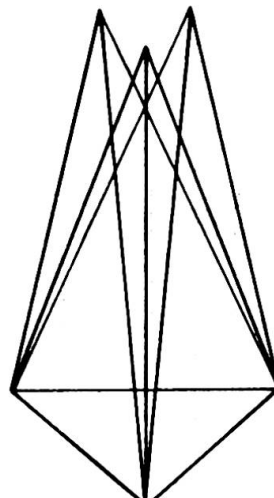
\* Least efficient members for elimination.

Removal of the least efficient members 5, 8 and 4 will result in a statically unstable situation. So only members 5 and 8 are omitted in the first instance. The method is repeated with the reduced framework having one order indeterminacy. The calculations for member efficiency factors are not listed here. The optimal statically determinate form obtained by removing the members 2 and 15 having the same lowest efficiency factor is shown in Fig. 3(a).

## 5. Conclusions

1. The optimal statically determinate form can be obtained using the following sequence of operations:

- If the order of indeterminacy of the framework is  $n$ , then  $n$  members having the lowest efficiency must be eliminated
- If two or more members have the same efficiency factor, they must be treated as a unit in the member elimination process. This may lead to the elimination of a joint.
- If the operation (a) leads to a statically unstable system, remove less than  $n$  members so that the resulting system is stable.
- As a consequence of (b) and (c) some times the reduced framework obtained will be indeterminate of reduced order;

a  
62.4b  
63.3c  
63.3d  
64.2e  
66.8f  
66.8g  
67.8

Note: Volume in 100 cm<sup>3</sup>  
is given under each fig

FIG.3 TYPICAL DETERMINATE  
FORMS OF THE TRUSS  
IN FIG.2

in which case the method is to be repeated starting with the reduced framework.

2. The process of eliminating members of least efficiency to get the optimal statically determinate form corresponding to an indeterminate framework was applied to several other examples successfully.

#### References

1. Dayaratnam, P., and Suryanarayan, P., "Feasibility of Full-stress Design", AIAA Journal, Vol. 7, No. 4, April 1969, pp. 773-774.
2. Suryanarayan, P., and Dayaratnam, P., "Behaviour and Design of Pin-connected Structures", International Journal for Numerical Methods in Engineering, Vol. 2, 1970, pp. 579-595.
3. Francis, A.J., "Direct Design of Elastic Statically Indeterminate Triangulated Frameworks for Single Systems of Loads", Australian Journal of Applied Science, Vol. 4, No. 2, June 1953, pp. 175-185.
4. Owen, J.B.B., The Analysis and Design of Light Structures, American Elsevier Publishing Co., Inc., N.Y., N.Y., 1965, pp. 32.
5. Venkateswara Rao, S., and Dayaratnam, P., "Full Stress Design of Prestressed Statically Indeterminate Frameworks", Presented at the Feb. 26-28, 1971, 23rd Annual General Meeting, Aeronautical Society of India, held at Indian Institute of Technology, Kanpur.
6. Venkateswara Rao, S., and Dayaratnam, P., Discussion on "Optimization of Redundant Prestressed Structures", Journal of Structural Division, ASCE, Vol. 97, No. ST9, Sept. 1971, pp. 2431-2434.
7. Cilley, F.H., "The Exact Design of Statically Indeterminate Frameworks: An Exposition of its possibility, But Futility", Trans. ASCE, Vol. 43, 1900, pp. 353-409.
8. Sved, G., "Minimum Weight of Certain Redundant Structures", Australian Journal of Applied Science, Vol. 5, No. 1, 1954, pp. 1-9.
9. Barta, J., "On the Minimum Weight of Certain Redundant Structures", Acta Technica, Vol. 18, Budapest, Hungary, 1957, pp. 67-76.
10. Dorn, W.S., Gomory, R.E., and Greenberg, H.J., "Automatic Design of Optimal Structures", Journal de Mechanique, Vol. 3, No. 1, March 1964.
11. Save, M.A., "Some Aspects of Minimum-Weight Design", Engineering Plasticity, Papers for Conference held in Cambridge,



March 1968, The Cambridge University Press, pp. 611-626.

#### Summary

The problem of finding the minimum weight topological form for a given loading from a general configuration which includes all possible member locations with respect to the given joint locations, is solved by using the concept of efficiency of a member. Relative efficiency factors of members are generated by introducing virtual prestress into the system. The optimal topology which is statically determinate is obtained by eliminating members with least efficiency.