

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 9 (1972)

**Artikel:** Czechoslovak research in the area of prestressed metallic structures

**Autor:** Tocháek, Miroslav / Rosenkranz, Bohuslav / Ferjenik, Pavel

**DOI:** <https://doi.org/10.5169/seals-9560>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 27.12.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Czechoslovak Research in the Area of Prestressed Metallic Structures

Recherches tchécoslovaques dans le domaine des constructions  
métalliques précontraintes

Tschechoslowakische Forschung auf dem Gebiete der vorgespannten  
Metallkonstruktionen

MILOSLAV TOCHÁČEK                      BOHUSLAV ROSENKRANZ  
Building Research Institute of the Czech Technical  
University, Prague, CSSR

PAVEL FERJENČÍK  
Civil Engineering College of the Slovak Technical  
University, Bratislava, CSSR

### 1. COORDINATED SCIENTIFIC AND RESEARCH ACTIVITIES

In the Czechoslovak Socialist Republic it is predominantly the Building Research Institute of the Czech Technical University in Prague (formerly a part of the Institute of Theoretical and Applied Mechanics of the Czechoslovak Academy of Sciences) and the Chair of Metal and Timber Structures of the Slovak Technical University in Bratislava that have been systematically engaged in the research of prestressed metallic structures (PMS). Since 1960 the state scientific and research programs for prestressed steel structures (PSS) have been regularly elaborated, each for the period of five years. The mentioned two institutions have mutually coordinated the scientific and research activities in the area of PSS in the state-wide scale.

The purpose of the first research period (1961-1965) especially was to prepare, in the cooperation with other working units, the Czechoslovak specification for the designs of PSS /7/. Hence, most activities were aimed towards that goal. Theoretical and experimental investigations pertained to the problems of designing, proportioning, constructing, economy, execution and verification of the actual behavior of the basic, most common types of web-plate structures and trusses /2,4,12,20,31,33-35,40,45-47,51,55,58/.

Rather rich outcomes of the first research period enabled Czechoslovakia not only to partake significantly in the success of the 1st International Conference on PSS, Dresden (German Democratic Republic) 1963 /12/, but even to organize the 2nd International Conference, Tale (Czechoslovakia) 1966 /13/, and to demonstrate there the Czechoslovakian achievements in the area of PMS until that time. Also the first Czechoslovakian monograph on PMS /4/ appeared, making the engineering public acquainted with the then state of knowledge in the area and providing a deeper exposition of the contents of the specification /7/.

The specification /7/ for designing PSS is one of the first codes in the world. It concerns mainly the structures prestressed by high-strength tendons and is based on the Limit States (Load

Factor) Concept /79,81/. The appropriate constructional materials are therein recommended, the principal organization -, transport -, and technological hints and data are provided. The attention is paid specifically to the construction and economical design of prestressed web-plate girders, queen post trusses and open-web trusses.

During the second research period (1966-1970), reflected mainly by the publications /63,65,66,68,70,72,74,75,82,84-86,89,91,94/, more involved problems were studied. They pertained, for instance, to the perfected economical proportioning of prestressed plate girders, and that also in the elasto-plastic state, composite girders, trussed beams, spatial roof-trusses, etc. Experimental investigations were performed to confirm theoretical results from the both periods. Some Czechoslovak achievements from the second research period were given publicity also at the 3rd International Conference on PMS, Leningrad (USSR) 1971 /15/. The second research period was concluded by the monograph /11/.

The objective of the third scientific and research period (1971-1975) is to deepen further the theory of PMS and, in addition to that, to solve also a number of technological problems. Consideration should be given, inter alia, to more complex systems prestressed by tendons; systems prestressed by other means; reconstructions and strengthening of structures through prestressing; dynamics and fatigue of PMS; modern design methods, especially those using the mathematical programming; special problems.

The specification /7/ for designing the basic types of PMS will be revised. Numerous remarkable findings have been acquired during the past research periods also in other fields than in that of web-plate structures and trusses - e.g., in the areas of prestressed suspended roofs /1,3,4,11-15,27,29,36,38,41,42,48,49,52,54,64,69,77,78,90/; suspended bridges /4,11-13,15,23,39,88/; guyed masts /4,5,11,30,44,73/; pressure vessels /4,19,24,37/; exploitation or removing of residual stresses /4,11,18,32,56,61/, etc. Nonetheless, no regulations for these disciplines will be incorporated in the revised specification /7/ as it is felt that these disciplines merit their own codes. They would certainly deserve a broader treatment in this paper, too. However, the shortage of space hinders that.

At present, a new specification is being prepared for the executions of PSS. A part of the scientific and research groundworks has been already accomplished /9,11/. During the first and second research periods, also many experimental investigations of the technological nature were performed, especially on the high-strength rods, strands and ropes, and on their anchorages /6,10,12-15,21,22,25,26,28,43,50,67,71,76,80,87,92,93/, with the aim to exploit the results for the specification. Among other things, the elasticity moduli both of virgin and prestretched elements, their actual bearing strength, as well as the state of strain of the zinc-poured sockets were observed.

At least a selection of some Czechoslovak findings is briefly dealt with in the sequel.

## 2. TRUSSES

Trusses prestressed by high-strength tendons are statically indeterminate systems even when supported in a statically determinate

manner. If their geometry is given or preselected, these structures can be economically designed by an inverse method /4,11,34,40,59, 63,70/:

The optimal total tendon forces are found, e.g., by the use of a linear programming technique, with the theoretical weight of the truss employed as the decision function. For these forces and the considered external loads, the truss members can be easily proportioned. After the sections have been picked up, the redundant forces in tendons are calculated, e.g. by the force method. The necessary prestressing forces are specified by the differences between the optimal total forces and the statically indeterminate forces in tendons. - In the reality, the design appears to be a little more involved, because of several intervening load combinations, differentiated prestress accuracy factors and some other coefficients not known in advance.

Much simpler is the design of those trusses, where the distinct tension members are prestressed independently, by the coaxial tendons. Each tendon influences only one member. The design of prestressed tension members is treated in /4,7,11,55/. The non-prestressed truss members are designed as in a structure without tendons.

The most complicated optimization problems are those where the system geometry is to be varied. In /60,68/, the variable parameters were: the amount of panels, the depth and the distance of plane roof trusses with parallel chords, the distance and the type of purlins, the type and the size of the used profiles, the configuration of the prestressing tendons and the magnitude of prestressing. The involved analytical expressions were solved numerically for the selected characteristic cases. In Fig.1, the theoretical steel consumption over the ground plan of 24m x 48m is correlated with the distance of the roof trusses which have the depth of 2,9m.

The results of the theoretical investigations were utilized in a typification study of the roof trusses /4,31/. A roofing using tubular  $\nabla$  - trusses, Fig.2a,b, proved to be very economical. Prestressing of trusses with the chords of constant cross-sections and the spans of 24; 30; 36m by two polygonal wire-ropes economizes 20 through 22% or 14 through 16% of steel, at the heavy cladding (240 kg/m<sup>2</sup>) or at the light cladding (60 kg/m<sup>2</sup>), respectively. The top truss web consist of purlins only, being connected for torsion with the concrete cladding slabs; during the erection, the crossed prestressed strands are employed as the temporary diagonals.

Prestressed open-web structures of a special character are the transmission and television masts /4,5,11,30,44,73/.

### 3. WEB-PLATE STRUCTURES

A good deal of attention has been paid to the economical design of a plate girder prestressed by a straight high-strength tendon near the tension flange /4,7,8,11,33,46,47,51,62,65,66,72, 75,82,89,91,94/. The highest economy can be achieved in a girder with the optimal asymmetry when the both girder flanges in the critical sections and the tendon along the entire length are fully stressed. Problems of the optimum design were solved for the case of a tendon of the optimum length as well as of the length equal-



ing the girder span; for various positions of the tendon with respect to the tension flange; for equal or differentiated design stresses of the flanges; for flanges with limited or unlimited cross-section areas. Four distinct decision functions were considered, the simplest being that of preselected tension flange parameter  $\varphi_2$ , Fig.3, or that of maximum bearing capacity at the constant volume. In a research program, conducted by one of the authors during his stay abroad, also the optimum design of a prestressed composite (steel - concrete) girder was studied, besides other topics /82/. In the case of the prestressed steel resp. composite girder, numerous intervening expressions and variables were replaced, through the analytical manipulations, by one resp. two equations only, for two resp. three unknowns, governed by one decision function. Because of their complexity, the expressions were solved numerically (by the use of a computer) for a representative selection of situations. The appropriate aids, as that one in Fig.3, can be worked out to facilitate the practical design.

The economical proportioning of prestressed steel plate girders was investigated both in elastic and elasto-plastic ranges, Fig.4 /65,75/. However, the buckling problems entangle the exploitation of the plastic reserve so far that not too much additional economy can be gained from the plastic design.

Another research topic was the prestressed deep trussed beam, i.e. a beam supported by posts and a polygonal tendon, Fig.5 /7,11, 74/. When the structure geometry is known, the design can be realized also by an inverse method similar to that for trusses. The optimum tendon force follows from the requirement that the critical sections of the beam should be fully stressed. The redundant tendon force can be readily calculated with the aid of the chart in Fig.5.

An inverse design technique combined with the linear programming was elaborated also for continuous beams prestressed by the enforced deformations of redundant constraints, e.g., by the intentional displacements of redundant supports /70,86/.

#### 4. CLOSURE

The endeavour of designers to economize maximally steel, without reducing the safety of structures, attracts the interest always more to PMS - as testified, e.g., by the themes of the contemporaneous international congresses (Leningrad 1971, Amsterdam 1972, Dresden 1974). The state of stress can be modified efficiently through prestressing structures in such a way that the internal effects are redistributed to the less utilized sections or section fibres, and the structural elements can be better and more evenly exploited.

It is our pleasure to conclude that Czechoslovakia belongs among the countries having recognized early the hopefulness and importance of PMS, so that the Czechoslovakian specialists have been able to contribute significantly to the scientific and engineering progress in this field.

#### 5. BIBLIOGRAPHY <sup>+</sup>

If not stated otherwise, references are in Czech or Slovak

<sup>+</sup> For the shortage of space, the bibliography by far cannot be complete. Just with a few exceptions, especially research reports and dissertations are not cited. For a more complete list see /16,17/.

- /1/ SOBOTKA, Z.: Suspended Roofs. Prague, SNITL 1962. Moscow, Stroiizdat 1964 (in Russian)
- /2/ SCHUN, J. - FERJENČÍK, P. - DUTKO, P.: Steel Structures II. Bratislava, SVTL 1963
- /3/ BIELEK, M.: Suspended Roof Structures. Bratislava, SVTL 1964
- /4/ FERJENČÍK, P. - TOCHÁČEK, M.: Prestressed Metal Structures. Bratislava SVTL 1966
- /5/ KOZÁK, J.: Steel Masts. Prague, SNITL 1966
- /6/ RABAS, E.: Catalog of Steel Strands and Wire Ropes. Prague, ŽD Bohumín 1966
- /7/ TOCHÁČEK, M. - FERJENČÍK, P. et al.: Branch Specification ON 73 1405 Instructions for Designs of Prestressed Steel Structures. Prague, ÚNM 1967
- /8/ FERJENČÍK, P. et al.: Metal Structures II. Bratislava, SVTL 1968
- /9/ VOVES, B.: Foundations for Branch Specification ON 73 14 .. Instructions for Executions of Prestressed Steel Structures in the Area of the Prestressing Technique. Prague, SvF ČVUT 1970. Research Report.
- /10/ SPAL, L.: Steel Strands and Wire Ropes in the Civil Engineering Structures. Prague, SNITL 1971
- /11/ FERJENČÍK, P. - TOCHÁČEK, M.: Vorgespannte Stahlkonstruktionen. (Working title, in German.) Bauingenieur-Praxis, Heft 38. Berlin, W. Ernst (submitted for press)

### Conference Proceedings

- /12/ Internationale Fachtagung "Vorgespannte Stahlkonstruktionen". Dresden 1963 (in German). = In: Wissenschaftliche Veröffentlichungen aus der Fakultät für Bauwesen der Technischen Universität Dresden 1964, B - Reihe, No 30
- /13/ International Conference on Prestressed Metal Structures, Tále 1966. Proceedings (in four languages). Prague, Building Research Institute 1966
- /14/ Seminar on Suspended Roof Structures. Reports. Bratislava 1970. Bratislava, Dom techniky 1971
- /15/ Third International Conference on Prestressed Metal Structures. Reports (in four languages). Leningrad 1971

### Bibliographical Booklets

- /16/ TOCHÁČEK, M. - FERJENČÍK, P.: Prestressed Metal Structures. Selected bibliography. With a supplement - Bibliographical leaflet No 13, coauthor ROSENKRANZ, B.. Prague STK 1965 and 1966
- /17/ FERJENČÍK, P.: Prestressed Metal Structures. Bibliographical compendium ... Bratislava, SVŠT 1971

### Papers, Chapters

- /18/ PUCHNER, O.: Schwellfestigkeit geschweisster Knotenblechanschlüsse und ihre Erhöhung durch örtliche Glühung (in German) = "Schweisstechnik 1956/4
- /19/ VALENTA, J.: Strip-Wound Vessels. = Rozpravy ČSAV" 1957/4
- /20/ KRCHOV, J.: Steel Structures with Prestressing. = In: Súčasný stav predpätého betonu v ČSR. Bratislava, N SAV 1957
- /21/ HEJDA, O.: Prestressing of Reinforcements by Electroheating. = "Stavivo" 1960/3
- /22/ RABAS, E.: Steel Wire Ropes in Civil Engineering Structures. = "Inženýrské Stavby" 1960/10

- /23/ TESÁR, A.: Suspended Pipeline Bridges. = In: Sborník vědeckých prací SvF SVŠT. Bratislava. SVTL 1961
- /24/ VALENTA, J.: The Elasto-Plastic State of Multilayer Vessels (in English). = "Rev. Mécan. Appl., Bucarest" 1961/3
- /25/ RABAS, E.: Possibilities and Ways of Fixing the Wire Rope Ends. = "Inž. Stavby" 1962/ 10
- /26/ KAUCKÝ, Z.: Prestress Loss from Wire Slips in an Anchor. = "Inž. Stavby" 1963/5
- /27/ PIRNER, M.: Model Measurements of Deformations of Prestressed Suspended Roofs with Static and Dynamic Loadings. = "Inž. Stavby" 1963/9
- /28/ KOZÁK, J.: Safety of Wire Ropes in Civil Engineering Structures. = "Inž. Stavby" 1964/1
- /29/ BARTLOVÁ, A.: A Solution for a Prestressed Unloaded Wire Rope Network. = "Staveb. Čas." 1964/4. Also in: /14, 15/
- /30/ VOŘÍŠEK, V.: Actual Behavior of Prestressed Guyed Masts for an Extra-High Voltage Transmission Line. = "Inž. Stavby" 1964/7
- /31/ TOCHÁČEK, M. - ROSENKRANZ, B.: Spatial Tubular Roof Trusses Prestressed by Wire Ropes. = "Inž. Stavby" 1964/11
- /32/ DUTKO, P.: Effect of Residual Stresses on the Instability of Centrally Compressed Struts with I-Sections and Possibilities of Increasing Their Load-Carrying Capacity. = In: Sborník vědeckých prací SvF SVŠT v Bratislavě. Bratislava, SVTL 1964
- /33/ FERJENČÍK, P.: Economies Reached in Some Types of Prestressed Metal Structures. = In: Sborník vědeckých prací SvF SVŠT v Bratislavě. Bratislava, SVTL 1964
- /34/ TOCHÁČEK, M.: Analysis of Prestressed Metal Structures According to the Limit States. = In: Teória výpočtov stavebných konštrukcií a základov podľa mezných stavov. Bratislava, V SAV 1964
- /35/ FERJENČÍK, P.: Einige Bemerkungen zu den vorgespannten Stahlkonstruktionen (in German). = In: /13/
- /36/ HORÁK, V.: Beitrag zur nichtlinearen Theorie der Hängedachkonstruktionen (in German). = In: /13/
- /37/ PANC, V.: Die Berechnung der kreiszylindrischen, durch elastische Ringe vorgespannten Druckbehälter (in German). = In: /13/
- /38/ PIRNER, M.: Dynamic Properties of Prestressed Cable Roofs (in English) = In: /13/
- /39/ TESÁR, A.: Berechnung und Ausführung einer vorgespannten Rohrleitungsbrücke in der ČSSR (in German). = In: /13/
- /40/ TOCHÁČEK, M.: Der Entwurf optimaler vorgespannter Fachwerke (in German). = In: /13/
- /41/ BŘEZINA, V.: Statical Analysis of Wire Rope Roofs. = "Staveb. Čas." 1965/3
- /42/ KOZÁK, J.: Statics of a One-Span / Continuous Wire Rope Subjected to a Vertical Load. = "Inž. Stavby" 1965/4, 8
- /43/ KRCHOV, J.: Fabrication Checks of Prestressing Force. = "Inž. Stavby"
- /44/ SPAL, L.: Utilization of a Computer for the Analysis of a Mast Guyed in Three Directions. = "Staveb. Čas." 1965/5
- /45/ TOCHÁČEK, M. - FERJENČÍK, P.: Prestressed Metal Structures in Czechoslovakia and Their Design. = "Staveb. Čas." 1965/6

- /46/ TOCHÁČEK, M.: A Web-Plate Girder Prestressed by a Straight Tendon. = In: *Práce ČVUT*, series I, 1965/7. Prague, SPN 1965
- /47/ HLAVÁČEK, V. - TOCHÁČEK, M.: Prestressed Steel Craneways. Ibid.
- /48/ FERJENČÍK, P. - TOCHÁČEK, M.: Cladding-Bearing Structure of Prestressed Wires. = "Inž.Stavby" 1965/9
- /49/ PIRNER, M.: Berechnung von vorgespannter Seilnetzen (in German). = *Bau-plan-Bautechn.* 1965/11
- /50/ VOVES, B.: A New Prestressing Reinforcement. = "Pozemní Stavby" 1965/11
- /51/ TOCHÁČEK, M. - FERJENČÍK, P.: Design of Prestressed Metal Structures (in Italian). = "Costruz.Metall." 1966/1
- /52/ BŘEZINA, V.: Theory of Lens-Shaped Cable Roof Anchored in a Plane Ring (in English). = "Rozpravy ČSAV, series TV" 1966/2
- /53/ FERJENČÍK, P. - TOCHÁČEK, M.: Anchorage, Prestressing and Force-Measurements in Tendons of Prestressed Metal Structures. = "Pozem.Stavby" 1966/3
- /54/ STUDNIČKA, J. - ZMRHAL, V.: Model Measurements of a Prestressed Suspended Roof Being Loaded Statically. = "Inž.Stavby" 1966/11
- /55/ FERJENČÍK, P.: Prestressed Metal Tension Members. = In: *Sborník vědeckých prací SvF SVŠT v Bratislavě*. Bratislava, SVTL 1966. Also in: /13/
- /56/ FALTUS, F.: Special Cases of Utilization of the Initial State of Stress in Metallic Structures (in English). = In: /13/
- /57/ FERJENČÍK, P.: Contributions of Czechoslovakia in the Area of Prestressed Metal Structures. = In: /13/
- /58/ LEDERER, F.: Metal Structures Prestressed by High-Strength Tendons (in English). = In: /13/
- /59/ PIRAS, Z. - TOCHÁČEK, M.: Introduction to the Econometrics of Prestressed Metal Structures (in English). = In: /13/
- /60/ ROSENKRANZ, B.: Optimum Heights of Prestressed Steel Parallel Chord Trusses (in English). = In: /13/
- /61/ TESÁR, A.: Special Cases of Utilization or Elimination of Initial Stresses in Metal Structures (in English). = In: /13/
- /62/ TOCHÁČEK, M.: Contributions of the Building Research Institute of the Czech Technical University to the Development of the Theory of Prestressed Metal Structures. - Prestressed Web-Plate Structures. - Prestressed Trusses. = In: /13/
- /63/ PIRAS, Z. - TOCHÁČEK, M.: Introduction to the Econometrics of Prestressed Metallic Structures (in English). = In: *Acta Polytechnica - Práce ČVUT v Praze*, series I. Prague, SPN 1967/1
- /64/ SOBOTKA, Z.: Statics of Annular Suspended Roofs with a Single Bearing System. = "Staveb.Čas." 1967/1
- /65/ TOCHÁČEK, M. - ROSENKRANZ, B.: Optimum Design of a Simply Supported Plate Girder Prestressed by a Straight Tendon, Within the Elasto-Plastic Range. = "Staveb.Čas." 1967/4-5
- /66/ FERJENČÍK, P.: On Some Problems of Prestressed Steel Plate Girders. = In: *Sborník vědeckých prací SvF SVŠT v Bratislavě*. Bratislava, SVTL 1967
- /67/ ROSENKRANZ, B. - FERJENČÍK, P. - TOCHÁČEK, M.: Tendons of Prestressed Metal Structures, Their Material and Protection. = "Pozem.Stavby" 1968/1



- /68/ ROSENKRANZ, B.: Contribution to the Weight-Optimization of Trusses (in Italian). "Costr.Metall." 1968/5. Also in: "Inž.Stavby" 1966/12
- /69/ KOLÁŘ, V.: Nichtlineare Gleichungssysteme der Seilnetze und ihre numerische Behandlung (in German). = "ZAMM" 1968/8
- /70/ PIRAS, Z. - TOCHÁČEK, M.: Use of Econometrics in Designs of Metal Structures. = "Staveb.Čas." 1968/8
- /71/ ROSENKRANZ, B. - SPAL, L.: On Problems of End Fittings of Steel Wire Ropes. = "Inž.Stavby" 1968/9
- /72/ VASILEKOV, F.V. et al.: Plate Girders Prestressed by a High-Strength Tendon. = In: Sborník vedeckých prác SvF SVŠT v Bratislave. Bratislava, Alfa 1968
- /73/ KOZÁK, J.: Einige Bemerkungen zur Projektierung verankerten Fernsehrohrmasten (in German). = "Stahlbau" 1969/6
- /74/ TOCHÁČEK, M. - FERJENČÍK, P.: Prestressed Trussed Beams (in Italian). = "Costruz.Metall." 1970/5. Also in: Zborník vedeckých prác SvF SVŠT v Bratislave. Bratislava, Alfa 1969
- /75/ ROSENKRANZ, B. - TOCHÁČEK, M.: Economy of Prestressed Steel Plate Girders in the Elasto-Plastic State. = "Pozem.Stavby" 1970/8
- /76/ SPAL, L.: Calculated Elasticity Moduli of Wire Ropes. = "Pozem.Stavby" 1970/8
- /77/ FERJENČÍK, P. et al.: Straight Prestressed Strings in Roof Structures. = In: /14/
- /78/ KADLČÁK, J.: Statical Analysis of Elastic Wire Rope Networks. = In: /14/
- /79/ TOCHÁČEK, M. - AMRHEIN, F.G.: Which Design Concept for Prestressed Steel? (in English). = "Engng J., AISC" 1971/1
- /80/ SPAL, L.: Zinc-Poured Sockets for Wire Rope Structural Members. = "Pozem.Stavby" 1971/3,4
- /81/ TOCHÁČEK, M. - AMRHEIN, F.G.: Design of Prestressed Steel Structures According to the Limit States (in English). = In: Conference on Applications of Statistics & Probability to Soil & Structural Engineering, Proceedings. Hong Kong, University of Hong Kong 1971
- /82/ MEHTA, C.L. (advisor TOCHÁČEK, M.): Optimum Design of Prestressed Plate Girders and Prestressed Composite Girders. Stillwater (USA), Oklahoma State Univ. 1971. Ph.D. - Dissertation (in English)
- /83/ AGÓCS, Z.: Results of Investigations into the Theoretical and Actual Behaviour of Prestressed Wire Rope Systems (in Russian). = In: /15/
- /84/ FERJENČÍK, P.: On Optimal Parameters of Prestressed Steel Plate Girders with the Given Bottom Chord Area (in Russian). = In: /15/
- /85/ HORÁK, V.: Employment of Inverse Variational Principles of Mechanics in the Investigations into Prestressed Rigid Bodies (in Russian). = In: /15/
- /86/ PIRAS, Z.: Optimization of Prestressed Metal Structures with One/Several Critical Loads (in Russian). = In: /15/
- /87/ ROSENKRANZ, B.: Beitrag zum Elastizitätsmodul von Stahlseilen (in German). = In: /15/
- /88/ TESÁR, A.: Die Vorspannung von Balkenbrücken inbs. Schrägseilbrücken durch planmässige Abstützungsbewegung im Zuge der Montage (in German). = In: /15/
- /89/ TOCHÁČEK, M.: Economic Design of a Prestressed Plate Girder, under More General Conditions (in English). = In: /15/

/90/ AGÓCS, Z.: Some Characteristics of Wire Ropes Used in Suspended Load-Carrying Systems. = In: Zborník vedeckých prác SvF SVŠT v Bratislave. Bratislava, Alfa 1971

/91/ FERJENČÍK, P.: Optimal Parameters of a Prestressed Steel Plate Girder. Optimization within the Elastic State. Ibid.

/92/ ROSENKRANZ, B.: Elasticity Modulus of Strands with a Locked Construction. = "Pozem.Stavby" 1971/7,8. Also in: /14/

/93/ ROSENKRANZ, B.: Effect of Wire Rope Prestretching on the Magnitude of the Elasticity Modulus. Ibid, in press


/94/ TOCHÁČEK, M. - MEHTA, C.L.: Economical Design of a Prestressed Plate Girder (in English). = "J.Struct.Div.,ASCE", in press

## 6. SUMMARY

Since 1960, the Czechoslovakian research in the area of prestressed metallic structures has been organized and planned for five-year periods. Achievements from the two periods are described, when mainly the basic structural types have been investigated. The specification for the designs of prestressed steel structures has been published and the specification for the executions of prestressed steel structures is in preparation. To illustrate some results of the accomplished scientific and research activities, problems of the economical design of prestressed steel trusses and web-plate structures are briefly treated.

## 7. ILLUSTRATIONS

Fig. 1  
Weight of a steel roof  
as affected by truss  
distance

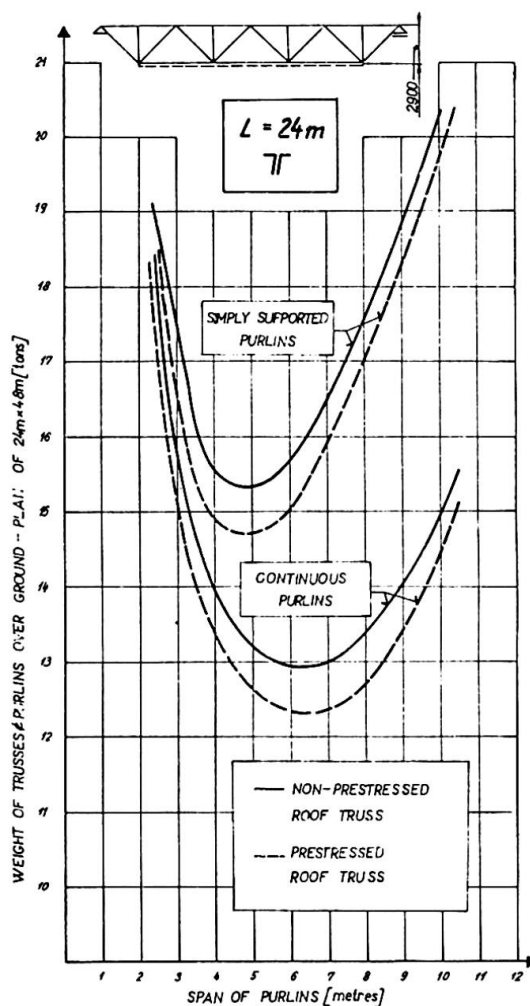

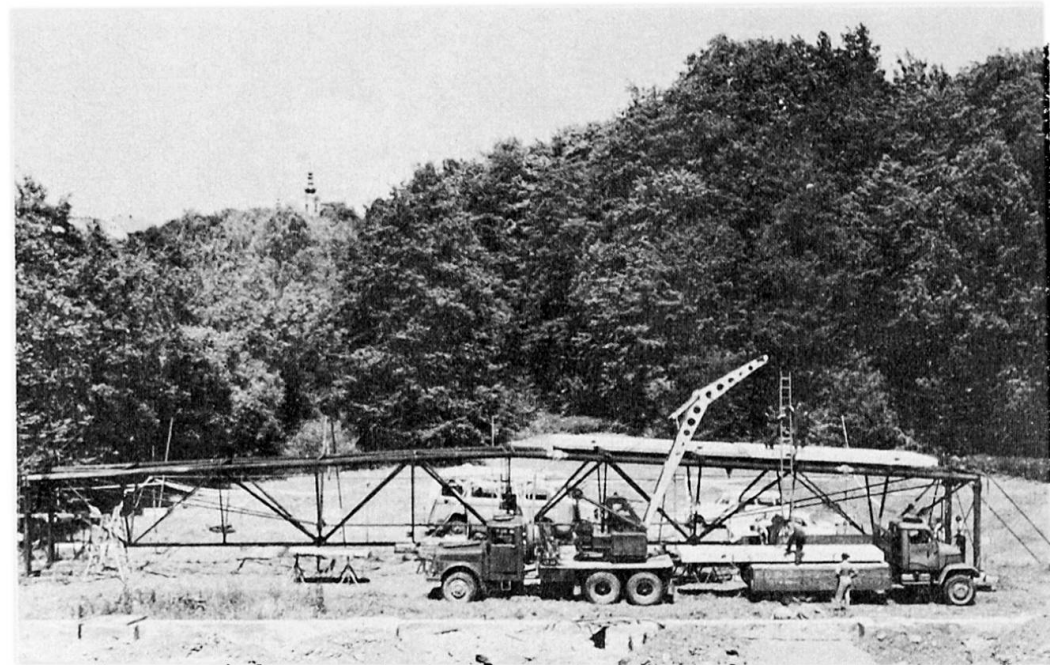
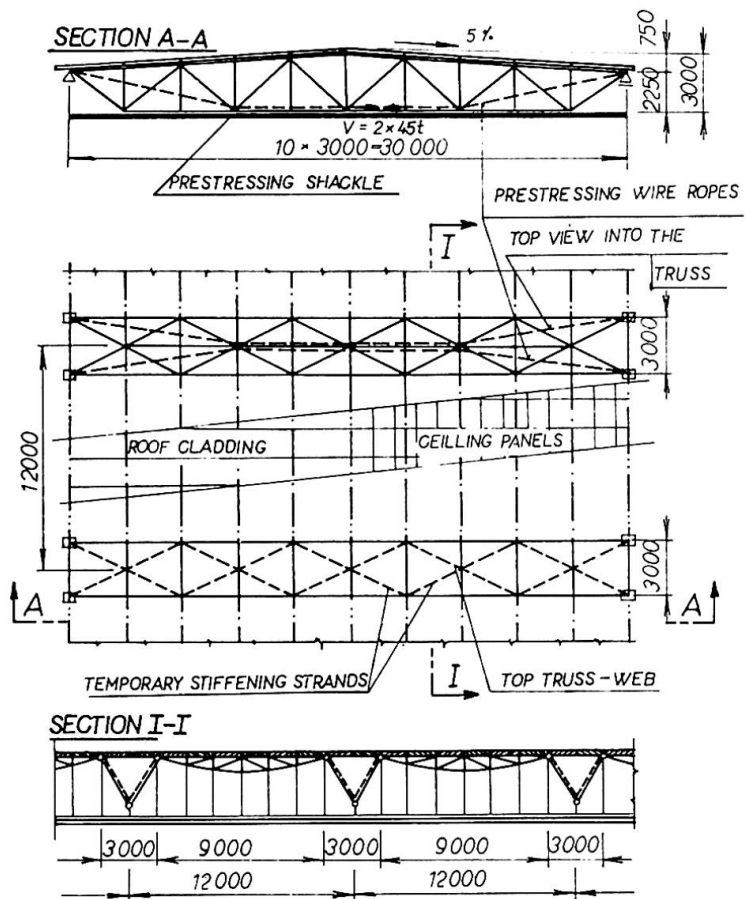


Fig. 2 Tubular roof truss prestressed by two polygonal tendons

(a) General layout

(b) Experimental investigations

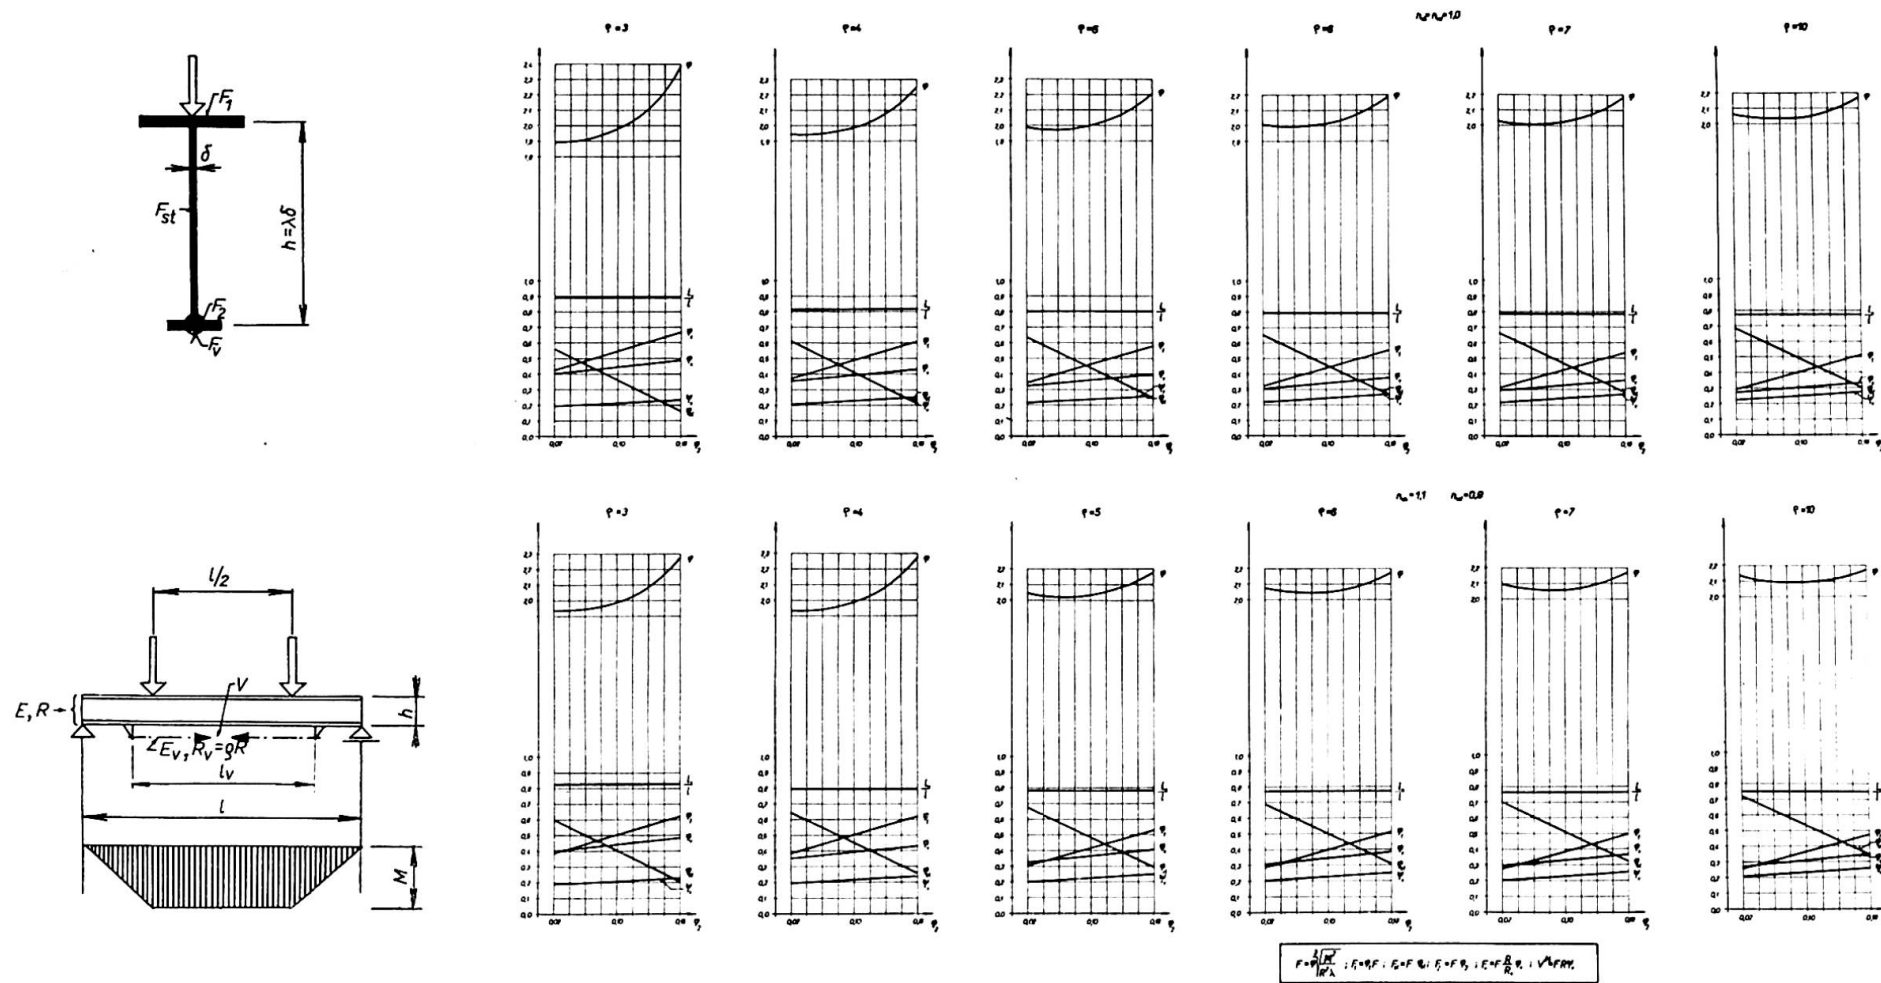


Fig. 3 Formulas and coefficients for a straightforward proportioning of a prestressed plate girder




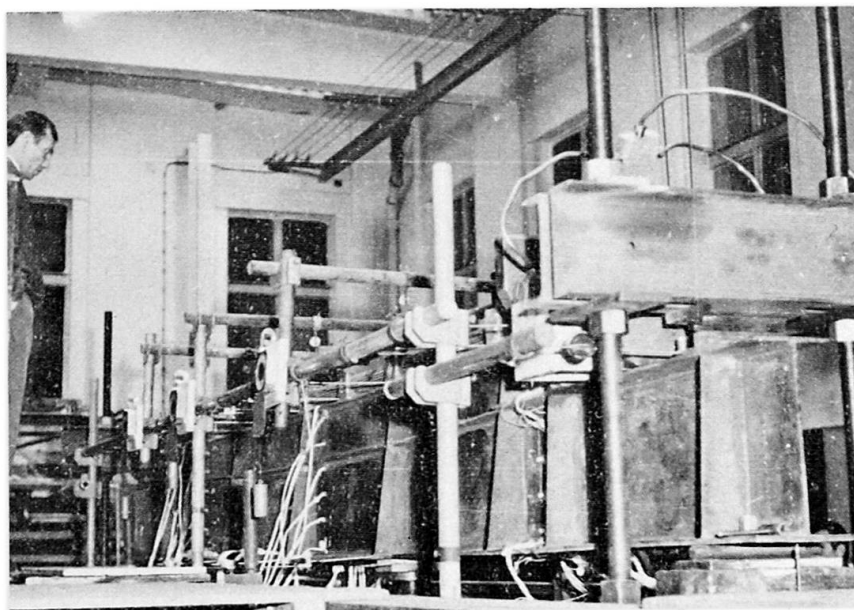


Fig. 4 Tests of plate girders in which prestressing exerted the elasto-plastic state

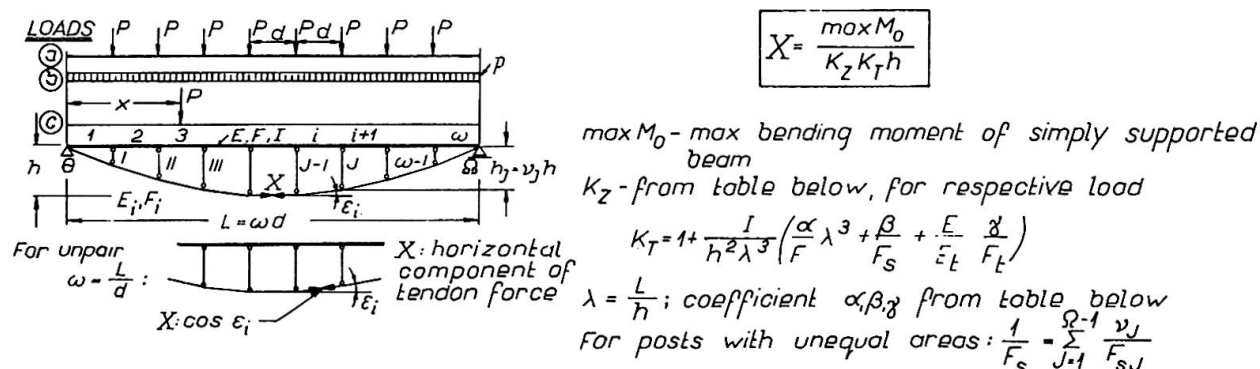

NO OF PANELS	LOAD			LOAD			COEFFICIENTS FOR CALCULATING SHAPE FACTOR $K_T$				RELATIVE LENGTHS OF POSTS			
	a	b	c	a	b	c								
	BENDING MOMENTS			LOAD										
	$\omega$	$\max$		COEFFICIENTS $K_z$			$\alpha$	$\beta$	$\gamma$	$\delta$	I	II	III	
	$M_0/PL$	$M_0/pL^2$	$M_0/pL^2$									$\Omega-1$	$\Omega-2$	$\Omega-3$
2	0,25	0,125	1	1	0,8	$\frac{x(L-x)}{\delta L^2 \sin \frac{\pi x}{L}}$	3	48	$3(\lambda^2+4)^{1,5}$	0,25	1			
3	0,333				1,023		1,8	32,4	$12[(\lambda^2+9)^{1,5}+0,5\lambda^3]$	0,19	1			
4	0,5				0,9485		2,087	20,87	$10,43[(\lambda^2+9)^{1,5}+(\lambda^2+1)^{1,5}]$	0,21	0,75	1		
5	0,6				1,007		18,49	17,12	$0,7397[(\lambda^2+11,11)^{1,5}+(\lambda^2+2,777)^{1,5}+0,5\lambda^3]$	0,19	0,66	1		
6	0,75				0,977		19,65	13,58	$0,6550[(\lambda^2+11,11)^{1,5}+(\lambda^2+4)^{1,5}+(\lambda^2+0,444)^{1,5}]$	0,20	0,55	0,88	1	
7	0,8571				1,004		18,62	11,83	$0,5320[(\lambda^2+12,25)^{1,5}+(\lambda^2+5,444)^{1,5}+(\lambda^2+1,361)^{1,5}+0,5\lambda^3]$	0,19	0,5	0,83	1	
8	1				0,987		19,25	10,11	$0,4812[(\lambda^2+12,25)^{1,5}+(\lambda^2+6,25)^{1,5}+(\lambda^2+2,25)^{1,5}+(\lambda^2+0,25)^{1,5}]$	0,20	0,437	0,75	0,937	
9	1,111				1,002		18,67	9,075	$0,4140[(\lambda^2+12,98)^{1,5}+(\lambda^2+7,29)^{1,5}+(\lambda^2+3,24)^{1,5}+(\lambda^2+0,81)^{1,5}+0,5\lambda^3]$	0,20	0,4	0,7	0,9	
10 & more	$0,125 \frac{\omega^2}{\omega}$							1	$\frac{x(L-x)}{\delta L^2 \sin \frac{\pi x}{L}}$	18,75	$120 \frac{(\omega^2)}{(\omega^2)^2}$	$18,75(\lambda^3+8\lambda+19,2\lambda^{-1})$	0,20	$\mu_J$
General formulas for coefficients							$\alpha = \frac{6\omega}{\sum_{j=1}^{n-1} v_j(v_{j-1}+4v_j+v_{j+1})}$ ; $\beta = \alpha \left( \frac{PL}{\max M_0^a} \right)^2 \frac{\sum_{j=1}^{n-1} v_j}{6\omega}$ ; $\gamma = \frac{\alpha}{\omega} \sum_{j=1}^{n-1} \sec^3 \epsilon_j$ ; $\mu_J = \frac{M_{0j}^a}{\max M_0^a}$ ; $\omega = \frac{L}{d}$ No. of panels Superscripts a,b,...-kind of loads $v_j = \frac{h_j}{h}$ ;							

Fig. 5 Formulas for the redundant force  $X$  in the tendon of a trussed beam