

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 9 (1972)

**Artikel:** Lateral buckling strength of girders with bracing systems

**Autor:** Fukumoto, Yuhshi / Kubo, Masahiro

**DOI:** <https://doi.org/10.5169/seals-9569>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 17.02.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

**Lateral Buckling Strength of Girders with Bracing Systems**

Résistance de voilement latéral de poutres raidies

Seitliche Beulsteifigkeit ausgesteifter Träger

**YUHSI FUKUMOTO**  
Associate Professor

Department of Civil Engineering  
Nagoya University  
Nagoya, Japan

**MASAHIRO KUBO**  
Research Assistant

**INTRODUCTION**

The girder-bracing structural systems which consist of two or more parallel main girders and lateral and/or sway bracings between them are commonly used in steel girder bridges. The characteristics required of the bracing systems are to counteract lateral buckling of the girders and to give adequate bracing in order to provide the required lateral support condition at the bracing points.

The load carrying capacity of braced beams and the bracing requirements for the plastically designed beams are investigated extensively at Lehigh University<sup>1), 2), 3)</sup>. Elastic lateral buckling of beams with lateral restraint at the intermediate supports are treated in Refs. 4)-8) as the bifurcation problem and in Refs. 9), 10), 11) including the initial imperfections. Diaphragm-braced columns and beams are studied extensively at Cornell University<sup>12), 13), 14)</sup> and their studies are cited by Professor Finzi in his Introductory Report<sup>15)</sup>.

In this paper the lateral buckling strength of two parallel girders with bracing system between them is solved in bending and the bracing effects on the buckling strength of main girders are discussed using stiffness parameters in the bracings. The optimum relative stiffnesses of the bracings which provide full bracing to girders are determined in which full bracing is defined to possess effectiveness to immovable supports in lateral and torsional at the bracing points. Lateral buckling strength of main girders is obtained in the inelastic range with assumed distributions of residual stresses while the bracing remains in elastic.

Tests are also conducted in this study. Total of eleven specimens are tested under uniform bending and the results of critical moments, buckled configurations, effective length, are compared with the theoretical ones. Bracing forces are also measured during test.

**THEORETICAL ANALYSIS**

Theoretical elastic and inelastic lateral buckling solutions are obtained by considering the total energy in the system as shown in Fig. 1. Girders with constant cross section are either simply supported or clamped at the both ends.

The total potential energy  $T$  in the system is

$$T = V + U + B \quad (1)$$

in which  $V$ =the internal strain energy stored in the main girders,  $U$ =the potential energy of the external loads, and  $B$ =the internal strain energy stored in the bracing system. In the lateral bracing as shown in Fig. 2 the strain energy  $B^{16})$  is

$$B = \frac{F_a}{2} \sum (\bar{u}_{Ai} - \bar{u}_{Bj})^2 + 2F_m \sum (\beta_{Ai}^2 + \beta_{Ai}\beta_{Bj}) \quad (2)$$

$$+ \beta_{Bj}^2) + 2F_m \sum (\bar{u}_{Ai}^{'2} + \bar{u}_{Ai}'\bar{u}_{Bj}' + \bar{u}_{Bj}^{'2})$$

in which  $F_a = E_b A_b \cos^2 \theta / L_b$ ,  $F_m = E_b I_b \xi \cos^2 \theta / L_b$ ,  $A_b$ =cross sectional area of one member,  $I_b \xi$ ,  $I_b \eta$ =moments of inertia of one member about  $\xi$  and  $\eta$  axes, respectively.  $\eta$ - $\xi$  plane is in the vertical plane including the member ends  $i$  and  $j$ .

Horizontal displacement  $\bar{u}_{Ai}$  at the bracing point is equated to the displacements  $u_{Ai}$  and  $\beta_{Ai}$  about the shear center as,

$$\bar{u}_{Ai} = u_{Ai} - \frac{kh}{2} \beta_{Ai}, \quad \bar{u}_{Bj} = u_{Bj} - \frac{kh}{2} \beta_{Bj} \quad (3)$$

In the sway bracing as shown in Fig. 3 the strain energy  $B$  is,

$$B = F_{ad} \sum \beta_i^2 + 12F_{ms} \sum \beta_i^2 + 12F_{\bar{ms}} \sum \bar{u}_i^{'2} \quad (4)$$

in which  $F_{ad} = E_b A_b h^2 \cos^2 \alpha / L_d$ ,  $F_{ms} = E_b I_b \xi / L_s$ ,  $F_{\bar{ms}} = E_b I_b \eta / L_s$ ,  $L_d$ =length of a strut, and  $L_s$ =length of a diagonal member.

The critical moment  $M_{cr}$  can be obtained by assuming the buckled configurations as trigonometric series which satisfy the boundary conditions at the both ends and solving the characteristic equations of the coefficients which extremize the total potential energy.

Fig. 4 shows the elastic and inelastic lateral buckling strength curves for three different residual stress patterns with the maximum compressive stress of  $\sigma_{rc} = 0.3\sigma_y^{17), 18)}$ . The curves for H-200×100×5.5×8mm beam represent the basic strength curves when unbraced. The following numerical examples are carried out for the same cross section having the residual stress pattern (1).

#### NUMERICAL EXAMPLES

The authors derived the relationships of the critical moment with the slenderness ratio and the stiffness parameters  $\delta$  and  $\gamma$  in the bracing system, where  $\delta$  and  $\gamma$  are defined as follows,

$$\delta = A_b / A_c, \quad \gamma_\xi = I_b \xi / I_c, \quad \gamma_\eta = I_b \eta / I_c \quad (5)$$

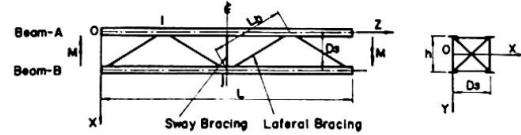


Fig. 1

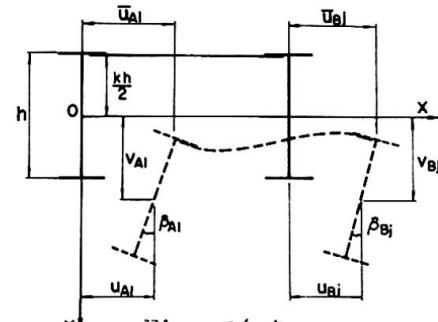


Fig. 2(a)

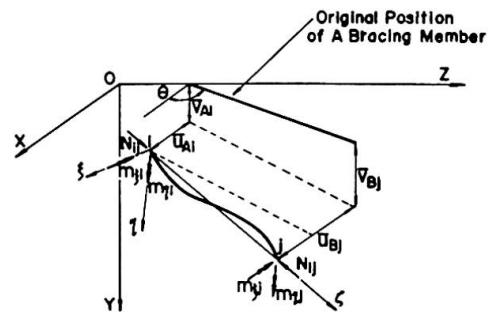


Fig. 2(b)

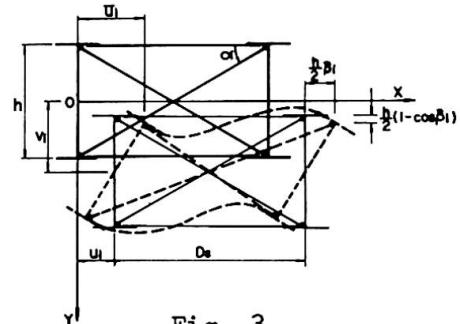


Fig. 3

in which  $A_b$  = area of one bracing member

$A_c = A_f + \frac{1}{6}A_w$  = area of a compression flange, and web of girder, respectively.  $I_c$  = moment of inertia of the compressive area  $A_c$ ,  $I_c \approx I_f = bt^3/12$ .

Lateral Bracing : Fig. 5 shows the buckling strength curves with lateral bracing along the compression flange for four different  $\delta$  and  $\gamma$  values. Bracing deformation is considered in the vertical plane, that is,  $\gamma = \gamma_\xi$ , and  $\gamma_\eta$ -effect on the buckling strength is almost negligible compared to  $\gamma_\xi$ -effect. Distance between two parallel girders in this case is  $D_s = 50\text{cm}$ . In this figure fully braced B-curve indicates the buckling strength when beam B is fully supported at the bracing points in order to meet  $u_i = \beta_i = 0$  and fully braced A-curve is for beam A. The fully braced B-curve is, in this case, practically important for the design purpose. Fig. 6 is another presentation of  $M_{cr}/L/r_y - \delta - \gamma$  curves. In this figure horizontal lines  $M_{cr}/M_y = 0.86, 0.76, 0.69$  and  $0.52$  represent the buckling strength for the fully braced B-curve with the specified  $L/r_y$  values, respectively. And  $\gamma$ -values which will be read at the intersections of the horizontal and curved lines give the optimum relative stiffness  $\gamma_{opt} = 0.07, 0.13, 0.23$  and  $0.28$ , respectively for the specified  $\delta = 0.01$ . Fig. 7 shows the relationship between the buckling strength and the braced point in the web height.  $k = 1, 0$ , and  $-1$  mean the beam braced at the tension flange, shear center (=centroid in this case) and compression flange, respectively. The bracing effect against the buckling strength is almost the same if the bracing points are in the compression zone of the main girders due to bending.

Sway Bracing : Fig. 8 shows the buckling strength curves with sway bracing at the span center. The curves are bounded by the unbraced and full bracing limits. Since the sway bracing possesses the effectiveness in rotation at the braced section, angle of rotation  $\beta_i = 0$  is only required to meet the full bracing condition.

Effective length : Fig. 9 shows the relations between the unbraced length  $\lambda L$  and the effective length  $\lambda_e L$  which delivers the same critical moment between the simply supported pinned ends. The curves are for full bracing strength in three different

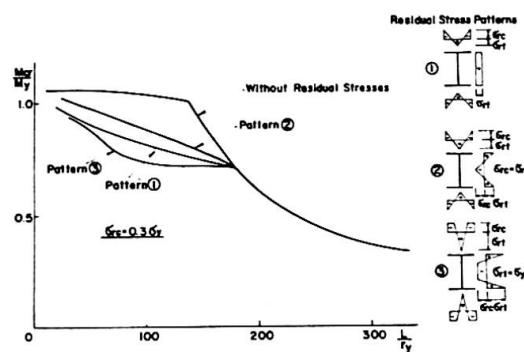


Fig. 4

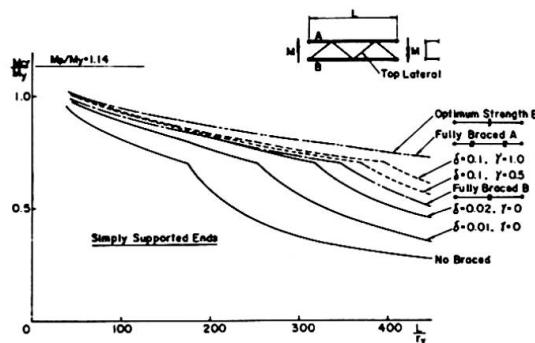


Fig. 5

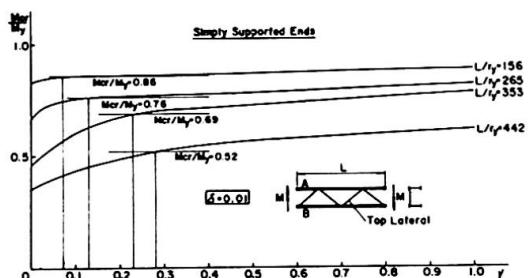


Fig. 6

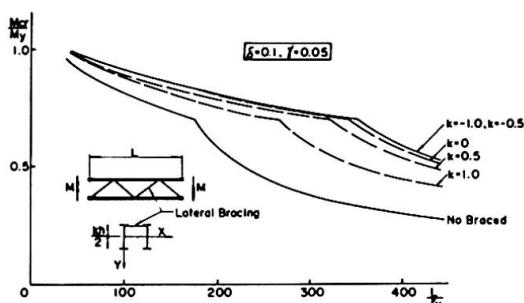


Fig. 7

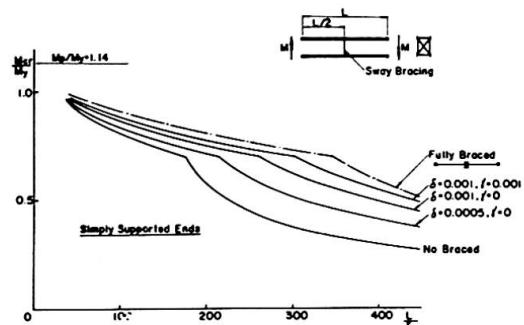


Fig. 8

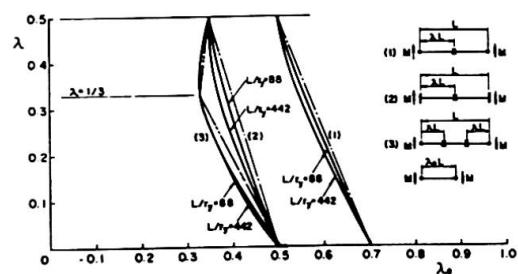


Fig. 9

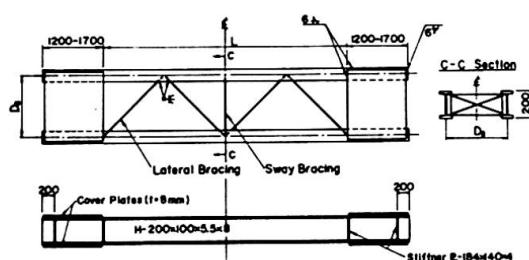


Fig. 10

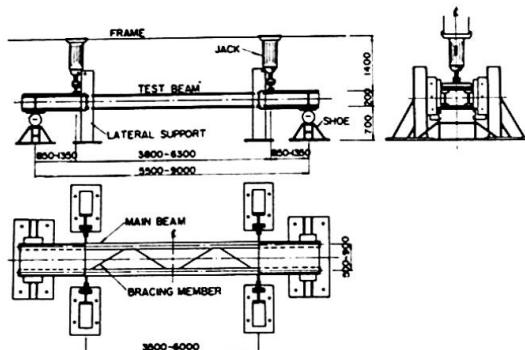


Fig. 11

cases. Theoretical solid lines for  $L/r_y = 88$  to 442 may be approximated with sufficient accuracy by chain lines in each case as,

$$\begin{aligned}
 (1) \quad \lambda_e &= -0.4 + 0.7 & \text{for } 0 \leq \lambda \leq 0.5 \\
 (2) \quad \lambda_e &= -0.3 + 0.5 & \text{for } 0 \leq \lambda \leq 0.5 \\
 (3) \quad \lambda_e &= -0.5 + 0.5 & \text{for } 0 \leq \lambda \leq 1/3 \\
 \lambda_e &= 0.1 + 0.3 & \text{for } 1/3 \leq \lambda \leq 0.5
 \end{aligned}$$

## TEST PROGRAM

Test Specimens and Test Setup : Total of eleven specimens are tested in bending under clamped end conditions against lateral buckling. Rolled beams of H-200×100×5.5 ×8mm section are used as main girders throughout and steel round bars are as bracing members. The detailed dimensions of the test specimens are given in Fig. 10 and Table 1, and the test setup is shown in Fig. 11 and Photo 1.

Load-Deformation Curves : A typical example of load-deformation curves is shown in Fig. 12 where  $M$  versus  $u$ ,  $v$  and  $\beta$  at span center are plotted for Type B11. From this figure it is observed that  $u_A$  and  $\beta_A$  remain unchanged during test and the full bracing condition is, thus, ensured at the bracing point.

Test Results : All of the test results are

Table 1

Specimens	Dimension of Test Beams	Bracing Systems
TYPE A1	H-200 × 100 × 5.5 × 8  $D_g = 50\text{cm}$ $L = 350\text{cm}$ $L/r_y = 158$	 <input type="checkbox"/> Not Braced
TYPE B11		 <input type="checkbox"/> Lateral(D=19 <sup>mm</sup> )
TYPE B12		 <input type="checkbox"/> Lateral(D= 9 <sup>mm</sup> )
TYPE C1		 <input type="checkbox"/> Sway(D= 9 <sup>mm</sup> )
TYPE D1		 <input type="checkbox"/> Lateral(D= 9 <sup>mm</sup> )  <input type="checkbox"/> Sway(D= 9 <sup>mm</sup> )
TYPE E1		 <input type="checkbox"/> Lateral(D= 9 <sup>mm</sup> )  <input type="checkbox"/> Sway(D= 9 <sup>mm</sup> )
TYPE F1		 <input type="checkbox"/> Strut(D=19 <sup>mm</sup> )
TYPE A2	H-200 × 100 × 5.5 × 8  $D_g = 90\text{cm}$ $L = 600\text{cm}$ $L/r_y = 270$	 <input type="checkbox"/> Not Braced
TYPE B2		 <input type="checkbox"/> Lateral(D=19 <sup>mm</sup> )
TYPE C2		 <input type="checkbox"/> Sway(D= 9 <sup>mm</sup> )
TYPE D2		 <input type="checkbox"/> Lateral(D= 9 <sup>mm</sup> )  <input type="checkbox"/> Sway(D= 9 <sup>mm</sup> )

D : Diameter of Steel bars used for bracing members

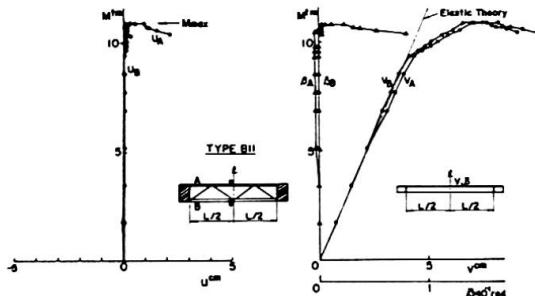


Fig. 12

Table 2

Specimens	L=350 <sup>cm</sup> (L/r <sub>y</sub> =158), D <sub>g</sub> =50 <sup>cm</sup>					Specimens	L=600 <sup>cm</sup> (L/r <sub>y</sub> =270), D <sub>g</sub> =90 <sup>cm</sup>				
	Test	M <sub>test</sub> (t-m)	Effect of Bracing	M <sub>theo.</sub> (t-m)	Theory		Test	M <sub>test</sub> (t-m)	Effect of Bracing	M <sub>theo.</sub> (t-m)	M <sub>test</sub> / M <sub>theo.</sub>
					M <sub>test</sub> / M <sub>theo.</sub>						
TYPE A1	4.95	1.00	4.83	1.00	1.02	TYPE A2	4.05	1.00	4.23	1.00	0.96
TYPE B11	5.40	1.09	5.27	1.09	1.02	TYPE B21	5.13	1.27	4.87	1.15	1.05
TYPE B12	5.35	1.08	5.26	1.09	1.02	TYPE B22	-	-	4.84	1.14	-
TYPE C1	5.25	1.06	5.06	1.05	1.04	TYPE C2	4.79	1.18	4.51	1.07	1.06
TYPE D1	5.55	1.12	5.27	1.09	1.05	TYPE D2	5.23	1.29	4.87	1.15	1.07
TYPE E1	5.50	1.11	5.27	1.09	1.05	TYPE E2	-	-	4.87	1.15	-
TYPE F1	5.23	1.06	5.06	1.05	1.03	TYPE F2	-	-	4.51	1.07	-

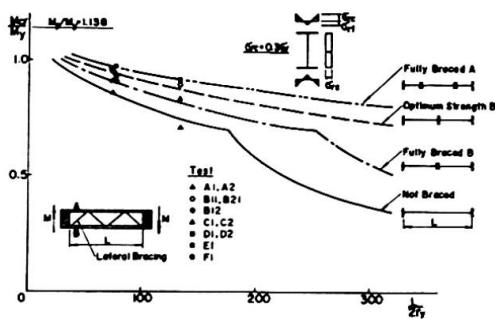


Fig. 13

plotted in Fig. 13 together with the theoretical buckling curves of unbraced and full bracing beams. Test points for the braced specimens B11-F1 are all above the fully braced B-curve.

A summary of test results is given in Table 2. The bracing effect which is defined by the strength ratio of each braced specimen to the unbraced beam is compared between theory and tests. Since all of the specimens are buckled in the inelastic range, the bracing effect may not be expected as it would be in the elastic range. Photo 2 illustrates several examples of specimens after test showing the buckled patterns of beams with full bracing.

Bracing Forces : Bracing forces such as axial force  $F_a$  and bending moments  $M_\xi$  and  $M_\eta$  are measured during test. Table 3 summarizes the measured bracing forces  $F$ 's and the resultant lateral forces  $P$ 's which are composed of  $F$ 's at the ultimate load. The maximum value of bracing force  $P$  is obtained as 2% of the compressive flange force  $P_f$ .

#### CONCLUDING REMARKS

Followings are the main subjects which are discussed in this paper.

- (1) Elastic and inelastic lateral buckling strength of beams with lateral and/or sway

Table 3

Specimens	F (kg)		F/F <sub>by</sub>	P (kg)		P/P <sub>f</sub>	Remarks
	1	2		1	2		
TYPE B11	1	-806	0.089	1	432	0.019	
	4	-819	0.091	2	417	0.018	
	2	-80	0.009	3	113	0.005	
	3	-142	0.016				
TYPE B12	1	-565	0.278	1	470	0.021	
	4	-598	0.294	2	296	0.013	
	2	-178	0.088	3	138	0.006	
	3	-74	0.036				
TYPE B21	1	-604	0.067	1	445	0.020	
	4	-666	0.074	2	445	0.020	
	2	-62	0.007	3	50	0.002	
	3	-80	0.009				

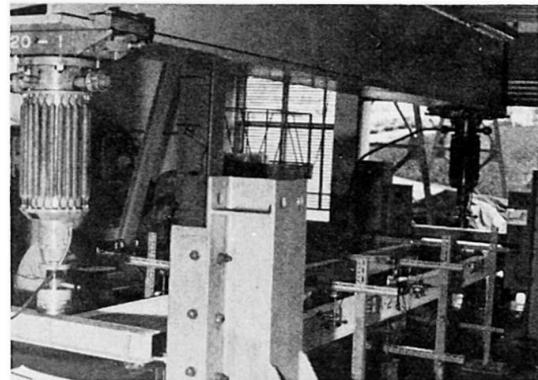


Photo 1

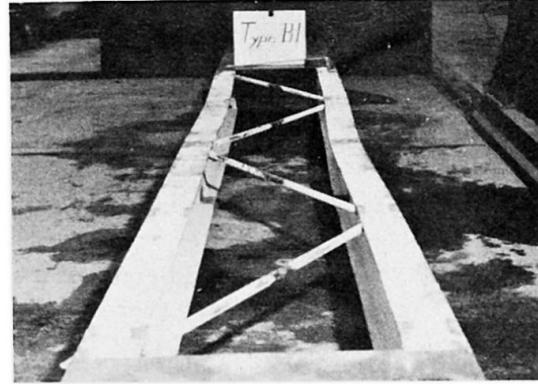


Photo 2(a)

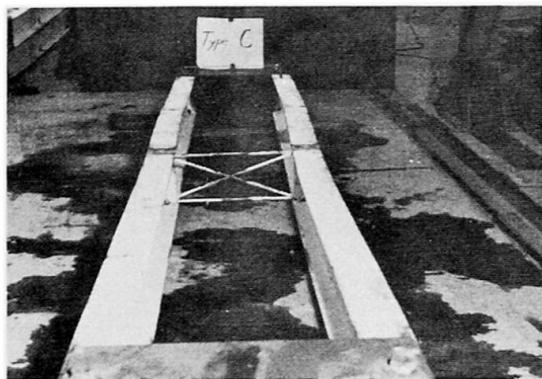


Photo 2(b)

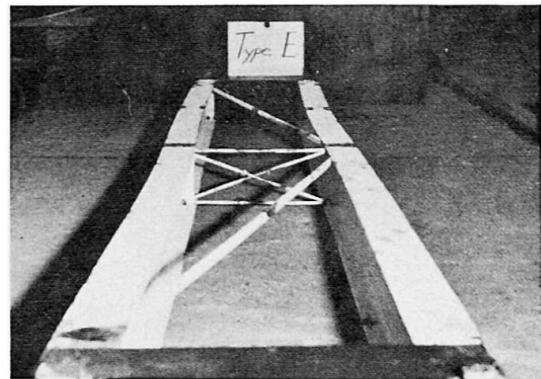


Photo 2(c)

bracings is determined theoretically including an arbitrary distributed residual stresses.

(2) Optimum relative stiffnesses  $\delta$  and  $\gamma$  in bracing members are defined and the bracing effect of bracing systems are discussed.

(3) Tests are conducted for eleven specimens with different bracing systems and bracing effects are compared with the theoretical results.

#### REFERENCES

- 1) Lay, M.G. and Galambos, T.V., Proc. ASCE, Vol. 92, No. ST 2, April, 1966.
- 2) Lee, G.C. and Galambos, T.V., Proc. ASCE, Vol. 88, No. EM 1, February, 1962.
- 3) Lee, G.C., Ferrara, A.T. and Galambos, T.V., Bulletin No. 99, Welding Research Council, New York, N.Y., September, 1964.
- 4) Hartmann, A.J., Proc. ASCE, Vol. 93, No. ST 4, August, 1967.
- 5) Hartmann, A.J., Proc. ASCE, Vol. 96, No. ST 7, July, 1970.
- 6) Klöppel, K. und Unger, B., Der Stahlbau, Heft 7, 1969.
- 7) Schmidt, L.C., Proc. ASCE, Vol. 91, No. EM 6, December, 1965.
- 8) Taylor, A.C. and Ojalvo, M., Proc. ASCE, Vol. 92, No. ST 2, April, 1966.
- 9) Massey, C., Proc. ASCE, Vol. 88, No. EM 6, December, 1962.
- 10) Winter, G., Proc. ASCE, Vol. 84, No. ST 2, March, 1958.
- 11) Zuk, W., Proc. ASCE, Vol. 82, No. EM 3, July, 1956.
- 12) Apparao, Errera and Fisher, Proc. ASCE, Vol. 95, No. ST 5, May, 1969.
- 13) Errera, S.J., Pincus, G. and Fisher, G.P., Proc. ASCE, Vol. 93, No. ST 1, February, 1967.
- 14) Pincus, G. and Fisher, G.P., Proc. ASCE, Vol. 92, No. ST 2, April, 1966.
- 15) Finzi, L., 9th IABSE Congress Introductory Report, Amsterdam, 1972.
- 16) Fukumoto, Y., Kubo, M., Proc. JSCE, No. 196, December, 1971.
- 17) Galambos, T.V., "Structural Members and Frames," Prentice-Hall, Inc., Englewood Cliffs, N.J. 1968.
- 18) Fukumoto, Y., Fujiwara, M. and Watanabe, N., Proc. JSCE, No. 189, May, 1971.

#### SUMMARY

Elastic and inelastic lateral buckling strength of two parallel girders with lateral and/or sway bracing systems between them is determined theoretically and the bracing effects on the buckling strength are discussed using stiffness parameters in the bracing. The optimum relative stiffnesses of the bracing which provide full bracing at the bracing points are obtained. Tests are also conducted in this study. Total of eleven specimens with different bracing systems are tested in bending, and the results of critical moments, buckled configurations and effective length are compared with the theoretical ones.