

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 10 (1976)

Artikel: Design of tall apartment buildings for fire resistance

Autor: Iizuka, Koji / Kodaira, Akio

DOI: <https://doi.org/10.5169/seals-10523>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 08.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Design of Tall Apartment Buildings for Fire Resistance

Conception de bâtiments d'habitation hauts en vue de leur résistance à l'incendie

Entwurf von hohen Wohnhäusern in bezug auf Brandeinwirkungen

KOJI IIZUKA

Chief Research Engineer

Technical Research Laboratory, Takenaka Komuten Co. Ltd.

AKIO KODAIRA

Research Engineer

Tokyo, Japan

The existing Japanese building codes for fireproof constructions prescribe the fire endurance of the individual structural elements, such as beams, columns, floors and so on, without concerning the fire properties and structural features of buildings. Buildings have been designed against fire according to these codes. However, researches on the fire properties in compartments and the behaviour of steel structures under fire have recently been carried out and made the design of fireproof constructions possible by engineering methods.

This paper discusses the method and the results of the fireproofing design of the Ashiyahama Housing Project currently under construction. The Ashiyahama Housing project consists of many multistoried buildings as shown in Photo 1 and the dwellings totaled 3384.

The fireproofing design system used on this project is illustrated in Fig.1, and the following procedure was applied:

- 1) Fire compartments were allocated as shown in Fig. 2.
- 2) Fire loads were estimated from the quantity and the quality of the combustible materials for individual fire compartments.
- 3) Using a monograph, the equivalent fire duration time of dwelling unit was obtained from the fire load, floor factor, temperature factor and others. The equivalent fire duration time of public floor was determined by taking into account the fire load and burning phenomenon in the open space.
- 4) If the fire was not to spread to the adjoining fire compartments, then advance to the next step.
- 5) Using a computer program, allowable temperature of the steel frame was calculated from dead load, live load, thermal expansion and deterioration of steel members at elevated temperature. Shown as example, Fig.3 represents the joint displacement according to only thermal expansion and Fig.4 shows the distribution of bending moment that is due to the ordinary design load and the thermal expansion.

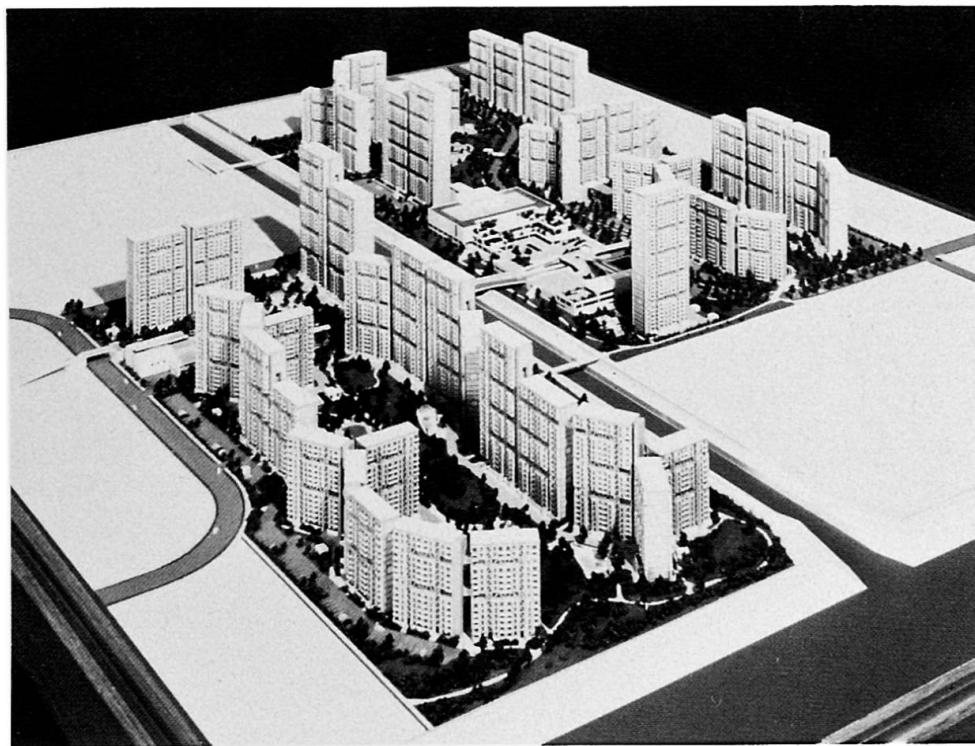


Photo 1: The bird's-eye view of the Ashiyahama Housing Project. (model)

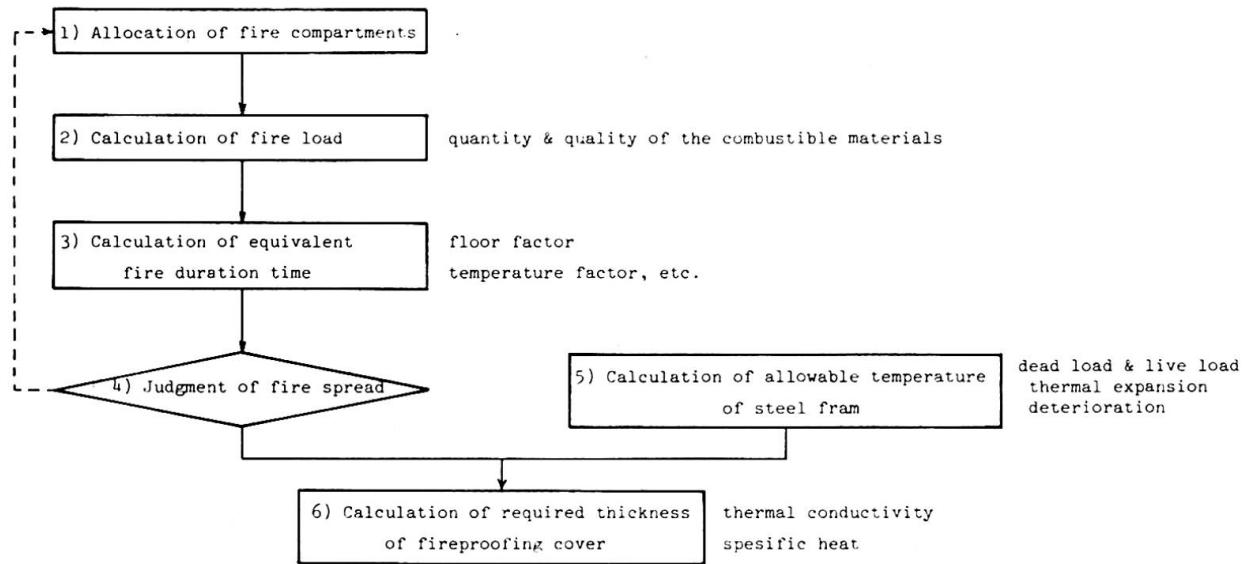


Fig. 1: The fire proofing design system

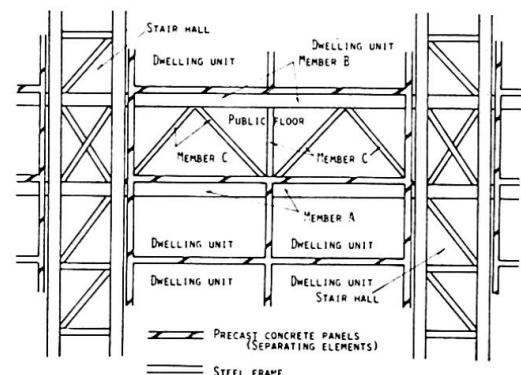


Fig. 2: The fire compartment and steel frame

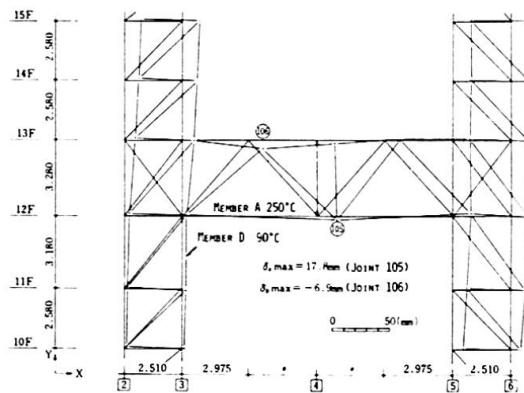


Fig. 3: Joint displacement according to only thermal expansion

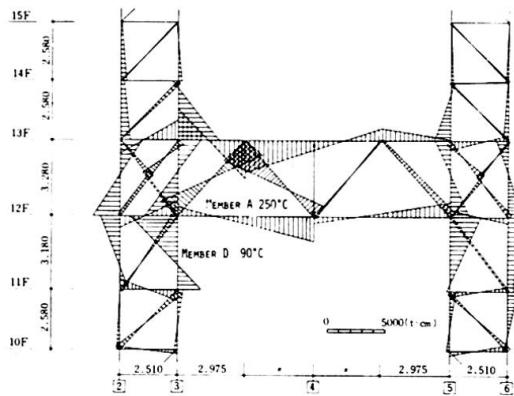


Fig. 4: Distribution of bending moment according to the ordinary design load

and the thermal expansion

Fire compartments	Fire load (Kg/m ²)	Equivalent fire duration time (min.)	steel members in compartment	allowable temperature of steel members (°C)	Required thickness of fireproofing cover* (mm)
Dwelling unit	60	90	A	250	45
Public floor	15	30	B	200	15
			C	100	15**
Stair hall	0		others		0

* Sprayed asbestos.

** This value was determined by taking into account the heating condition and burning phenomenon in the open space.

Table 1: Results of the fireproofing design

- 6) The need for some fireproofing cover was realized by which the temperature rise of steel member could be kept below the allowable temperature after heating for equivalent fire duration time along the standard time-temperature curve. The required thicknesses of the fireproofing cover for members named A, B and C were calculated. It was found that other members did not require fireproofing cover.

These results are tabulated in Table 1.

Adopting the fireproofing design in this project despite the current building codes, structural safety against fire was secured and economical design was established.

The fireproofing design system adopted in this project can be applied, without modification, to such design of other buildings.

References

1. Kawagoe, K., and Sekine, T., "Estimation of Fire Temperature-Time Curve in Rooms", Building Research Institute of Japan, Research Paper No.11, No.17, No.29
2. Saito, H., "Research on the Fire Resistance of Steel Beam", Building Research Institute of Japan, Research Paper No. 31, 1968
3. Kawagoe, K., "System Design for Fire Safety", Proceedings of the International Conference on Planning and Design of Tall Buildings, Vol.Ib, 1972
4. Kawagoe, K., and Saito, H., "Thermal Effects of Fire in Buildings", Introductory Report of Tenth Congress of IABSE, 1976

SUMMARY

This paper discusses the method and results of the fireproofing design for the Ashiyahama Housing Project currently under construction. By adopting the fireproofing design in this project, without restriction of the existing Japanese building codes for fireproofing construction, the structural safety against fire was secured and economical design was satisfied.

RESUME

Cette étude discute la méthode et les résultats du calcul et de la conception du quartier d'habitation d'Ashiyahama en vue de la résistance à l'incendie. L'adoption de cette méthode qui n'est pas en contradiction avec la réglementation actuelle japonaise en la matière a permis d'assurer la sécurité structurale contre l'incendie et de réaliser un projet économique.

ZUSAMMENFASSUNG

Dieser Artikel erörtert die Methoden und Ergebnisse des Entwurfs in bezug auf Brandeinwirkungen für das derzeitig im Bau stehende Ashiyahama Wohnbauprojekt. Die für dieses Projekt herangezogene Methode gewährleistet einen ausreichenden Brandschutz, ist zudem wirtschaftlich und entspricht in allen Punkten den bestehenden japanischen Vorschriften für brandsichere Bauten.