

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 10 (1976)

Artikel: Earthquake-resistant design of the tower and pier system of suspension
bridges

Autor: Yamada, Yoshikazu / Furukawa, Kohei

DOI: <https://doi.org/10.5169/seals-10424>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 29.12.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Earthquake-Resistant Design of the Tower and Pier System of Suspension Bridges

Dimensionnement contre les tremblements de terre du système de pylône et pile des ponts suspendus

Die Erdbebenbemessung des Systems von Pylon mit Sockel bei Hängebrücken

YOSHIKAZU YAMADA
Professor of Civil Engineering
Kyoto University
Kyoto, Japan

KOHEI FURUKAWA
Assistant of Civil Engineering
Kyoto University
Kyoto, Japan

1. INTRODUCTION

Economical applications of mathematical programming methods in structural optimization are limited to specific structures as mentioned in Introductory Report.¹⁾ In the case of structures with relatively simple and bulky dimensions, the mathematical programming method could be applied efficiently even if the structures are designed under relatively complicated design conditions. Dynamic loading problems are not treated in Introductory Report, and loading conditions appearing in optimal design have been mostly limited to the static ones.

Studies on aseismic design of long-span suspension bridges were carried out for many years in Japan, and the results of investigations were published as the official or individual reports. According to the studies on aseismic design of the suspension bridges, design of the tower and the pier is very important.²⁾ These parts of the bridge must be investigated as a system because of the interaction of these parts during the earthquake. The tower and pier system of suspension bridges involves rigid, massive, and large pier and relatively flexible and slender tower, so that the system has very complicated interaction.²⁾ The combination of the methods of mathematical programming and dynamic structural analysis is in fact well suited to the aseismic design of the tower and pier system of suspension bridges.

To formulate earthquake action for aseismic design, the method of response spectrum is employed in the design codes of the long-span suspension bridges in Japan. In this paper, the response spectrum method is mainly applied in the dynamic analysis and design of the system. Another approach based on more probabilistic concepts using power spectrum density of earthquake action and random vibration theory is possible using design constraints for reliability. Some approximation concepts³⁾ are used to save the computing time and to decrease the design variables in this paper.

2. THE STRUCTURAL SYSTEM

The system to be designed is the tower and pier system of the suspension

bridges as shown in Fig.1, height h_T of the tower and h_P of the pier are determined from the environmental attribute of the bridge, and width b_1 of the pier is determined from geometrical relation with the bridge width. The design variables in global sense are, therefore, the longitudinal width b_2 of the pier and the stiffness of the tower. The combination of these two variables induces very complicated dynamic properties of the system.²⁾

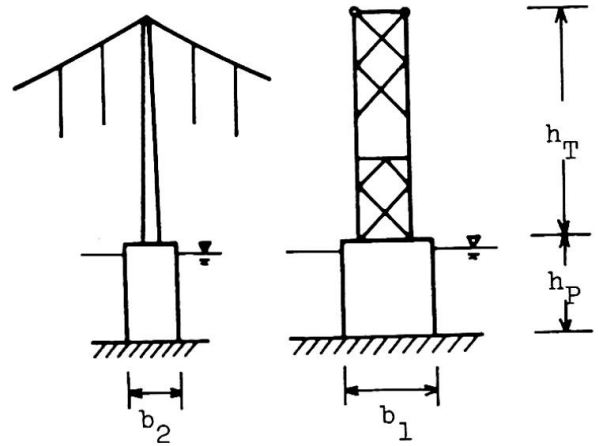


Fig.1 Structural System

3. DYNAMIC ANALYSIS OF THE SYSTEM

Analytical Model The analytical model of the tower and pier system of the suspension bridge treated in this paper is shown in Fig.2. The tower is assumed to be the lumped mass system, and the following assumptions are made:

- (1) The foundation has elastic property.
- (2) The reaction of the cable at the top of the tower is taken into account by applying the equivalent axial thrust and using an equivalent spring for the cable.⁴⁾
- (3) The pier is assumed to be perfectly rigid and to be a single-degree-of-freedom capable of rocking motion.

Model of Earthquake Excitation Earthquake excitation is represented by response acceleration spectrum. In this study, the standard spectrum as shown in Fig.3 is used which is authorized by Honshu-Shikoku Connection Bridge Authority of Japan. In this figure, the longitudinal axis refers to be response magnification factor β , and standard acceleration in this design is 180 gal.

Dynamic Response Analysis The equation of motion for this multi-degrees-of-freedom-system can be written as:

$$[M]\{\ddot{y}\} + [C]\{\dot{y}\} + [K]\{y\} = -[\bar{M}]\{\ddot{z}\}$$

where $[M]$ is a mass matrix, $[C]$ is a damping matrix, $[K]$ is a stiffness matrix, $\{y\}$ is a displacement vector, $\{\ddot{z}\}$ is an earthquake acceleration vector. With the aid of modal matrix $[\Phi]$ and the generalized displacement vector $\{q\}$, where $\{y\} = [\Phi]\{q\}$, then the equation of motion rewritten in the following form assuming proportional damping.

$$[I]\{\ddot{q}\} + [2h_i\omega_i]\{\dot{q}\} + [\omega_i^2]\{q\} = -\{P\}$$

where ω_i refers to natural frequency, and h_i is damping constant of i -th mode.

The maximum displacement of point j , $y_{\max}^{(j)}$, can be evaluated by root mean square method:

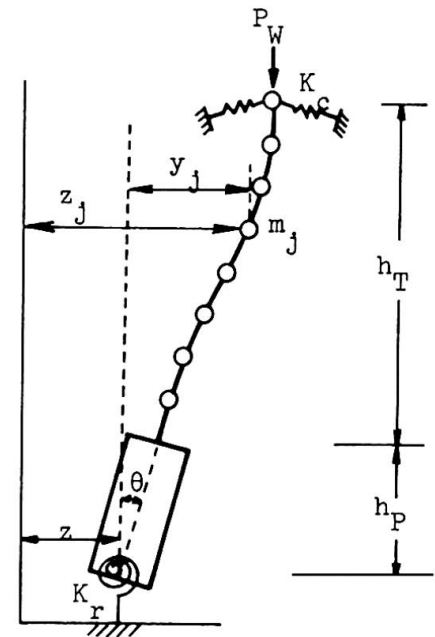


Fig.2 Analytical Model

$$y_{\max}^{(j)} = \sqrt{\sum (F_i \phi_i^{(j)} q_{i \max})^2}$$

where F_i refers to the participation factor of i -th mode, $\phi_i^{(j)}$ refers to the relative displacement of point j in i -th mode. $q_{i \max}$ is obtained from response spectrum given in Fig.3:

$$q_{i \max} = \beta_i \ddot{z}_{\max} / \omega_i^2$$

where \ddot{z}_{\max} is the maximum earthquake acceleration.

4. DESIGN MODEL

Approximation Concepts of the Tower To save calculation time and to improve reliability of solution, two design variables of the system are selected: One is the moment of inertia of the tower, the other is the longitudinal width of the pier. Other variables of the system are defined by approximation concepts.³⁾

Let I , A and Z refer to the moment of inertia, the cross sectional area and the section modulus respectively, the empirical relation such as following may hold:

$$A = 1.21 * I^{0.33}$$

$$Z = 0.55 * I^{0.75}$$

The moment of inertia of the tower can be varied along the height in two ways: One is linearly varied; the other is stepwise varied into two portions. These design models are shown in Fig.4.

Foundation Model The modulus of elasticity of the foundation is denoted by E . In the result of the past

studies,²⁾ complicated dynamic phenomena due to the foundation condition, width of the pier, and the rigidity of the tower were observed. In the cases where two of the natural frequencies are very close, the coupled vibration of the tower and pier occurs, and the structural systems of such cases should be avoided. In this study, the modulus of elasticity ranges from $10 * 10^4$ ton/m² to $150 * 10^4$ ton/m² taking into account wide variety of foundation conditions.

Damping Constant The damping constant is assumed to be 0.1 for the mode where the vibration of the pier is predominant, and to be 0.02 for the vibration of the tower. For the coupling modes 0.05 for both modes is assumed.

5. OPTIMIZATION

Objective Function The generalized cost, W , is selected to be the objective function:

$$W = W_T + k * W_P$$

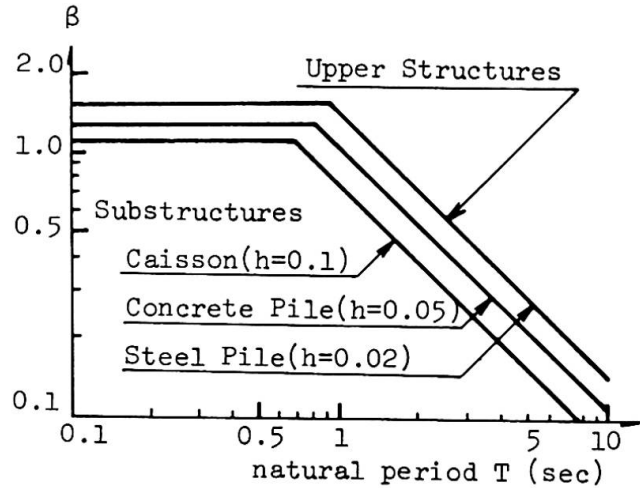


Fig.3 Earthquake Excitation Model

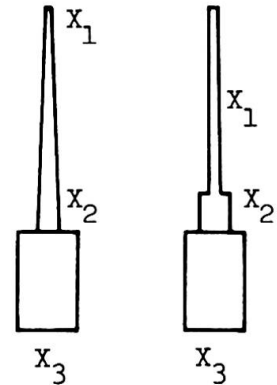


Fig.4 Design Model

where W_T represents the weight of the tower and W_P , of the pier, and k refers to the ratio of unit cost of the pier to that of the tower.

Constraints The following constraints are considered:

- (1) Stress of the tower shaft does not exceed the given allowable stress defined against earthquakes.
- (2) Displacement of the pier top does not exceed the given allowable value.
- (3) Tower shaft is safe against buckling.
- (4) Pier is safe against overturning.
- (5) Other geometric conditions.

Optimization Technique Objective function and constraints obtained in this way become non-linear and undifferential type, so SUMT by Powell's direct search method without differential is employed as optimization technique.

6. NUMERICAL EXAMPLE AND INVESTIGATIONS

As a numerical example, the tower and pier system shown in Fig.5 is considered, and the results of the computation are shown in Table 1,2. These computation were performed using the design model with stepwise varied cross section. In making Table 1, the following data was used:

cost ratio 0.2
 maximum acceleration 180 gal
 allowable value of pier top displacement 0.05 m
 allowable stress of steel 37700 ton/m²


From Table 1, the following investigations may be made:

- (1) When elastic modulus of foundation, E , is small, the design of the system is determined only by the displacement constraint at the pier top. When the value of E is large, it tend to be determined by overturning of the pier and buckling of the tower, and the pier width tends to decrease. It shows that the pier width is closely related with E .
- (2) The generalized cost is greatly affected by the modulus of elasticity of the foundation. Thus, the investigation of the foundation is very important.
- (3) When E is large, the effect of earthquake response tend to decrease, and stiffness of the tower becomes uniform along the height of the tower. From this, when E is large enough, it is not necessary to increase the cross section of the lower part of the tower.

The design is controlled severely by the constraint of the displacement of the pier top in the range of small E . When this constraint is relieved to 0.065 m, the results are shown in Table 2. From these Tables, the following remarks may be made:

- (1) In the range of small E , when the constraint of the pier top displacement is relieved slightly, the generalized cost decrease considerably. This result shows that the allowable value of the displacement of the pier top has a significant effect.
- (2) In the range of large E , the result is not so affected by the constraint on displacement.

7. CONCLUSION

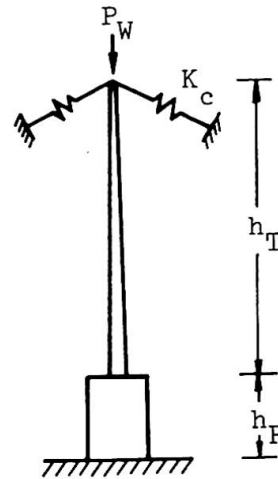

$P_W = 29743$ ton
 $K_c = 45650$ ton/m
 $h_T = 184.0$ m
 $h_P = 52.0$ m
 $b_1 = 50.0$ m

Fig.5 Tower and Pier System

Table 1

E (10 ⁴ ton/m ²)	I (m ⁴)		b ₂ (m)	W	Constraints					
	Upper	Lower			Pier		Tower			
					(1)	(2)	Top	(3)	Base	(4)
10	11.22	62.26	38.97	52146	X					
20	16.52	65.97	24.45	36077	X					
30	5.81	24.90	19.91	27865	X					
50	4.78	21.80	14.37	20896	X	X				X
70	4.75	4.77	14.35	20509		X				X
150	4.75	4.77	14.35	20509		X				X

(1): Displacement of the pier top (2): Overturning
 (3): Stress of the tower shaft (4): Buckling

Table 2

E (10 ⁴ ton/m ²)	I (m ⁴)		b ₂ (m)	W	Constraints					
	Upper	Lower			Pier		Tower			
					(1)	(2)	Top	(3)	Base	(4)
10	8.15	32.71	28.76	39081	X					
20	13.65	24.43	18.56	27053	X					
30	4.75	8.41	14.54	20842	X					X
50	4.77	4.78	14.35	20511		X				X
70	4.77	4.78	14.35	20511		X				X
150	4.75	4.77	14.35	20508		X				X

(1): Displacement of the pier top (2): Overturning
 (3): Stress of the tower shaft (4): Buckling

The optimal design of the tower and pier system on the elastic foundation subjected to earthquake excitation is studied by using response spectrum and modal analysis. Investigation in this study shows that necessity or importance of displacement condition of the pier top must be discussed more precisely from the point of safety of the structure in the range of small E, and that necessity of earthquake-resistant design must be discussed more precisely from the dynamic response of the structure in the range of large E.

PROBABILISTIC APPROACH

Probabilistic approach using power spectrum density for earthquake and based on random vibration theory can be formulated as follows.

Earthquake load is represented by power spectrum density function shown in Fig.6.⁵⁾ As earthquake is assumed to have zero mean and to be stationary probabilistic process, variances of the displacement and of the velocity can be evaluated based on the random vibration theory.

Failure probability can be com-

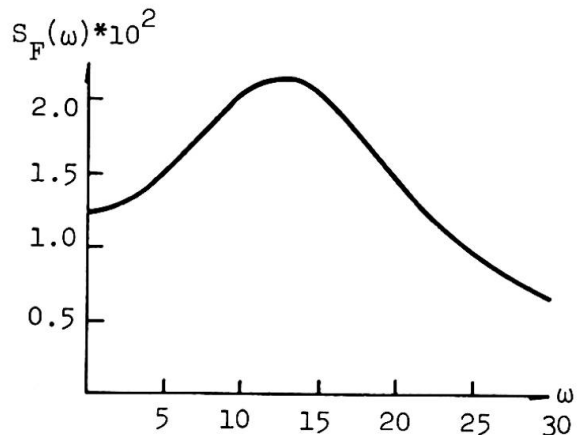


Fig.6 Power Spectrum Density

puted through dynamic reliability theory using displacement and velocity variances. Thus, it is possible to formulate optimization by probabilistic approach using failure probability as constraints.

REFERENCES

1. Gellatly, R. A. and Dupree, D. M., Examples of Computer-aided optimal Design of Structures, Introductory Report of Tenth Congress of IABSE, 1975.
2. Yamada, Y., Goto, Y. and Takemiya, H., Studies on the Earthquake-Resistant Design of Suspension Bridge Tower and Pier System, Proc. of V World Conference on Earthquake Engineering, 1974.
3. Templeman, A. B., Optimization Concepts and Techniques in Structural Design, Introductory Report of Tenth Congress of IABSE, 1975.
4. Konishi, I. and Yamada, Y., Earthquake Response and Earthquake Resistant Design of Long Span Suspension Bridges, Proc. of III World Conference on Earthquake Engineering, 1965.
5. Housner, G. W. and Jennings, P. C., Generation of Artificial Earthquakes, J. of EM Div. ASCE, Feb., 1964.

SUMMARY

Effective application of the structural optimization method is limited to some specific types of structures in civil engineering structures. In the case of structures with relatively simple and bulky dimensions, the mathematical programming method could be applied efficiently. In this paper, the authors carried out the optimal design of the tower and pier system of suspension bridges on the elastic foundation subjected to earthquake ground motion using response spectrum and dynamic analysis.

RESUME

Une application pratique de la méthode d'optimisation structurale est limitée à certaines structures du génie civil. Dans le cas de structures relativement simples et de grandes dimensions, la méthode de programmation mathématique peut être appliquée efficacement. Dans cet article les auteurs ont fait le calcul d'optimisation du système de pylône et pile des ponts suspendus sur fondation élastique subissant le tremblement de terre, à l'aide d'une analyse dynamique.

ZUSAMMENFASSUNG

Die Anwendung der Tragwerks-Optimierung ist auf einige spezielle Strukturarten im Bauingenieurwesen begrenzt. Bei Strukturen mit einfachen und massigen Abmessungen lässt sich das mathematische Programmierungsverfahren erfolgreich verwenden. In diesem Aufsatz wird eine Optimierung des Pylonsystems auf elastischem Untergrund unter Erdbebenlast entwickelt. Hierbei werden Verhaltensspektren und dynamische Analysen angewendet.