

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 10 (1976)

Artikel: Lateral buckling of welded beams and girders in HT 80 steel

Autor: Fukumoto, Yuhshi

DOI: <https://doi.org/10.5169/seals-10456>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 05.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Lateral Buckling of Welded Beams and Girders in HT 80 Steel

Déversement de poutres soudées en acier HT 80

Kippen von geschweißten Balken aus HT 80 Stahl

YUHSI FUKUMOTO
Professor of Civil Engineering
Nagoya University
Nagoya, Japan

1. INTRODUCTION

Lateral instability of compression flange has been one of the important limit state criteria for the determination of the ultimate bending strength of flexural members when the compression flange is not restrained enough against lateral deflection. The author has shown the results of the investigation on the ultimate strength of beams with lateral bracing at the intermediate points^{1,2)} and without any lateral supports in between^{3),4),5)} from theory and test.

This paper briefly describes the lateral buckling test³⁾ on welded beams and girders with steels of SM 50 and quenched and tempered HT 80 (nominal yield stresses $\sigma_y = 3200\text{kg/cm}^2$ and 7000kg/cm^2 , respectively), and the initial imperfections such as welding residual stresses and initial deformations are discussed with the test results. The comparisons are also made between theory and test.

2. THE TEST SPECIMEN

No lateral bracings are provided except at the both ends of the specimen where the loading beams with heavy box cross section are connected using high strength bolts. The end condition of the specimen is thus clamped laterally and torsionally at the both ends. The test setup is shown in Fig. 1.

The detailed nominal dimension of the beam-type specimens are given in Table 1(a). The beam types are of 25cm or 30cm in beam height with the span length ranging from 2.5m to 4.5m. Total number of beam specimens is thirty-six of which

SM 50 : twenty-one including nine annealed beams, and
HT 80 : fifteen including three annealed beams.

Table 1(b) shows for the plate girders of 80cm or 100cm in height with the span length ranging from 2.8m to 4.0m. Number of sub-panels in web is two for G-D and the others have three sub-panels.

The specimens are tested under uniform bending and under moment gradient with the end moment ratio of 0.5.

3. INITIAL IMPERFECTIONS

After the test specimen is set in the position for testing and just prior to loading, the initial imperfections are measured in flanges and web plates. Table 2 summarizes the maximum lateral deflections of the compression flange δ_u and tension flange δ_l at the span center. Effective length of the specimens against lateral buckling becomes $L_e = L/2$ (L =length of the specimen) under uniform bending since the clamped end condition is met at the connections of the specimens and the loading beams.

4. WELDING AND ANNEALING DATA

Welding data for HT 80 steel specimens are as follows ;

For beams : Manual welding with 5mmφ electrode (YAWATA L80). 180 - 230 amp. current and preheating at 120°C.

For girders : Manual welding with 4mmφ electrode (KAWASAKI KS116, B-1). 165 - 175 amp. current and preheating at 120°C.

Annealing conditions are set for relieving the welding residual stress as shown in Fig. 2.

5. THE TEST RESULTS

a) Tension Coupon Test

Test coupons with 20cm gage length for SM 50 and with 5cm gage length for HT 80 are cut out from the flange and web plates. The averaged values of static yield stress are listed below.

Beams { SM 50 : 3428 kg/cm²
 HT 80 : 7841 "

Girders { SM 50 : 3810 kg/cm² (8mm) and 3236 kg/cm² (10mm)
 HT 80 : 7850 " (10mm) and 6610 " (6mm)

b) Lateral Buckling Test

Figs 3a and 3b show the load-deflection curves of a beam and a girder in HT 80, respectively, in which β = angle of rotation of the compression flange, u_1 and u_2 = lateral deflection of lower and upper flanges and v = vertical deflection at the span center. At the early stage of loading, the lateral and torsional deformations of the girder flanges are observed together with the buckled patterns in each web panel. Lateral deflection of the compression flange at failure is influenced considerably by the direction of the buckled deformation of the web in bending.

A summary of test results with the reference loads is listed in Table 3.

Fig. 4 shows a presentation of the test points plotted on the σ_{cr} - $(r_x/r_y)(L/d)^3$ axes, in which r_x and r_y are the radii of gyration of cross section about x and y axes, respectively and d = the beam height. The test points for HT 80 indicate less scatter and the reduction of lateral buckling strength becomes less for HT 80 specimens compared with SM 50 specimens in the inelastic range.

Fig. 5 shows another presentation of the test points plotted for beam-type specimens on the $\sigma_{cr}/\sigma_y - (L/r_e)/(L/r_e)$ axes. Non-dimensionalized slenderness ratio λ is taken in the abscissa whereas (L/r_e) is the slenderness ratio at which the elastic lateral buckling stress reaches to the yield point, that is, $\sigma_u = \sigma_y$. The maximum experimental moments M_u are non-dimensionalized by the yield moment M_y . In order to clarify the effect of residual stress distributions on the lateral buckling strength of steel beams, the comparisons are made between the annealed beams and the as-weld beams having the same sizes. Twelve pairs of specimens are tested and by taking the strength ratios $M_{annealed}/M_{as-weld}$ for each pair, it is obtained that the average strength gains are of 11% for annealed beams compared to the as-weld beams for SM 50 and 6% for HT 80 steel. It may be concluded that the welding residual stress distributions may reduce the lateral buckling strength for about 11% average for SM 50 and 6% average for HT 80 against the beams without residual stresses. Experimental findings may prove that the residual stress effect upon the lateral buckling strength becomes less with the higher yield strength steel.

6. COMPARISONS OF THEORY AND TEST

a) Inelastic Lateral Buckling Strength

Inelastic lateral buckling strength under uniform moment is determined for the arbitrary residual stress patterns using the numerical iteration technique for computing the cross sectional properties.^{5), 7)} In Table 4 the calculated ideal critical elastic moment M_{cr} and inelastic moment M_{in} for the two different residual stress patterns (A) and (B) are given for girder-type specimens. Fig. 6 shows the theoretical results using the residual stress patterns 1 and 2 ($\sigma_{rc} = 0.3\sigma_y$ inset in Fig. 6) are compared with the test points for the as-weld and annealed A-type beams.³⁾

b) Ultimate Bending Strength

Since the inelastic lateral buckling resistance is furnished mostly by the compression flange, the lateral buckling strength becomes very close to that of a column whose effective cross section is composed of the compression flange and one-sixth of the web⁶⁾. In this analysis the ultimate bending strength of members with initial imperfections such as residual stresses and lateral deflection of the compression flange is determined by the beam-column concept using the numerical integration technique⁵⁾. The residual stress patterns used for this analysis is shown in Table 4 as patterns (C) and (D).

In Fig. 5 the ultimate bending strength curves obtained by the beam-column concept are given for the D-type and C-type beams with the initial lateral deflection $u_0 = L_e/1000$ and with and without residual stress pattern (C). Ultimate bending strength curves for the residual stress patterns (C) with, $\sigma_{rc} = 0.3\sigma_y$ and initial lateral deflection $u_0 = L_e/1000$ may explain the lower bound estimate against the plotted test results. In table 4 the numerical results by the beam-column approach are also given for the plate girders G-A~G-G.

Table 1 (a) Dimensions of test beams

Test Beams	Steel	d (mm)	b (mm)	w (mm)	t (mm)	L (mm)	Moment Ratios	Remarks
A-1-0	250 SMOA	100	6	8	3.000	1.0	as-welded	
A-1-1	250 SMOA	100	6	8	3.000	1.0	as-weld	
A-1-2	250 SMOA	100	6	8	3.000	0.5	as-weld	
A-2-0	250 SMOA	100	6	8	4.000	1.0	as-welded	
A-2-1	250 SMOA	100	6	8	4.000	0.5	as-weld	
A-2-2	250 SMOA	100	6	8	4.500	1.0	as-weld	
A-3-0	250 SMOA	100	6	8	4.500	1.0	as-welded	
A-3-1	250 SMOA	100	6	8	4.500	1.0	as-weld	
B-1-0	250 SMOA	120	6	8	3.000	1.0	as-welded	
B-1-1	250 SMOA	120	6	8	3.000	1.0	as-weld	
B-2-0	250 SMOA	120	6	8	4.000	1.0	as-welded	
B-2-1	250 SMOA	120	6	8	4.000	1.0	as-weld	
B-2-2	250 SMOA	120	6	8	4.500	1.0	as-welded	
C-1-0	300 SMOA	100	6	8	3.000	1.0	as-welded	
C-1-1	300 SMOA	100	6	8	3.000	1.0	as-weld	
C-2-0	300 SMOA	100	6	8	4.000	1.0	as-welded	
C-2-1	300 SMOA	100	6	8	4.000	1.0	as-weld	
C-3-0	300 SMOA	100	6	8	4.500	1.0	as-welded	
C-3-1	300 SMOA	100	6	8	4.500	1.0	as-weld	
D-1-0	250 HT80	100	7	10	2.500	1.0	as-welded	
D-1-1	250 HT80	100	7	10	2.500	1.0	as-weld	
D-1-2	250 HT80	100	7	10	2.500	0.5	as-weld	
D-2-0	250 HT80	100	7	10	3.000	1.0	as-welded	
D-2-1	250 HT80	100	7	10	3.000	0.5	as-weld	
D-3-0	250 HT80	100	7	10	3.500	1.0	as-welded	
D-3-1	250 HT80	100	7	10	3.500	1.0	as-weld	
D-3-2	250 HT80	100	7	10	3.500	0.5	as-weld	
E-1-0	250 HT80	120	7	10	2.500	1.0	as-weld	
E-1-1	250 HT80	120	7	10	3.000	1.0	as-weld	
E-2-0	250 HT80	120	7	10	3.000	1.0	as-weld	
K-1-0	300 HT80	120	7	10	3.500	1.0	as-weld	
F-1-0	300 HT80	100	7	10	2.500	1.0	as-weld	
F-2-0	300 HT80	100	7	10	3.000	1.0	as-weld	
F-3-0	300 HT80	100	7	10	3.500	1.0	as-weld	

d =beam height, δ_u =flange width, t =flange thickness.

w =web thickness, L =beam length.

Table 1 (b) Dimensions of test girders

Test Girders	Steel	d (mm)	b (mm)	w (mm)	t (mm)	L (mm)	Moment Ratios
G-A	SM50A	1000	120	6	10	4.100	1.0
G-B	SM50A	1000	120	6	8	4.100	1.0
G-C	HT80	800	110	6	10	3.300	1.0
G-D	HT80	800	110	6	10	2.800	1.0
G-E	HT80	800	130	6	10	3.300	1.0
G-F	HT80	800	130	6	10	2.800	1.0
G-G	HT80	800	110	6	10	3.300	1.0

Table 3 Summary of reference and experimental loads

Specimens	M_y (t-m)	M_p (t-m)	M_{max} (t-m)	σ_{max} (kg/cm ²)	M_{max}/M_y
A-1-0			7.69	3.218	0.94
A-1-1	8.18	9.45	7.00	2.929	0.96
A-1-2			9.70	4.059	1.19
A-2-0			7.94	3.322	0.97
A-2-1	8.18	9.45	6.61	2.766	0.81
A-2-2			8.42	3.523	1.03
A-3-0			6.33	2.649	0.77
A-3-1	8.18	9.45	5.75	2.406	0.70
A-3-2			8.54	3.573	1.04
B-1-0			9.40	3.406	0.99
B-1-1	9.47	10.78	8.00	2.899	0.84
B-2-0			8.60	3.116	0.91
B-2-1	8.47	10.78	8.76	3.174	0.93
B-3-0			9.28	3.362	0.98
B-3-1	9.47	10.78	7.10	2.572	0.75
C-1-0			7.58	2.493	0.73
C-1-1	10.41	12.16	9.20	3.026	0.88
C-2-0			8.04	2.645	0.77
C-2-1	10.41	12.16	6.88	2.263	0.66
C-3-0			7.48	2.461	0.72
C-3-1	10.41	12.16	6.89	2.266	0.66
D-1-0			21.15	7.073	0.94
D-1-1	22.53	26.06	20.89	7.279	0.93
D-1-2			27.90	9.721	1.24
D-2-0			20.68	7.206	0.92
D-2-1	22.53	26.06	18.54	6.450	0.92
D-2-2			23.10	8.049	1.03
D-3-0			19.21	6.693	0.85
D-3-1	22.53	26.06	16.24	5.659	0.72
D-3-2			21.84	7.610	0.97
E-1-0			26.14	29.84	0.91
E-2-0			26.14	29.84	0.93
E-3-0			26.14	22.79	0.87
F-1-0			28.68	33.50	0.92
F-2-0			28.68	33.50	0.78
F-3-0			28.68	33.50	0.73
G-A			71.68	106.32	0.61
G-B			72.31	93.74	0.57
G-C			113.90	128.81	0.57
G-D			113.90	128.81	0.73
G-E			126.15	140.23	0.75
G-F			126.15	140.23	0.83
G-G			113.90	128.81	0.58

M_y =Calculated Yield Moment

M_p =Calculated Plastic Moment

Table 2 Initial imperfections of flanges


Test Beams and Girders	Upper flange δ_u (mm)	Lower flange δ_l (mm)	δ_u/L	δ_l/L
A-1-0	0	0	0	0
A-1-1	1.5	0	1/1960	0
A-3-1	4.5	0	1/1000	0
B-1-0	3	8	1/990	1/370
B-2-0	0	2	0	1/1985
B-3-1	0	6	0	1/745
C-1-0	1.5	1.5	1/1970	1/1970
C-1-1	4.8	6.8	1/620	1/435
D-2-0	0	0	0	0
D-2-2	0	0	0	0
D-3-1	2.5	0	1/1400	0
D-3-2	1	0	1/3470	0
E-2-0	1	0	1/2960	0
E-3-0	2.5	0	1/1390	0
G-A	1	1.5	1/4100	1/2720
G-B	1	5	1/4100	1/820
G-C	1	2	1/3300	1/1650
G-D	3	3	1/940	1/940
G-E	0	0	0	0
G-F	2	0	1/1400	0
G-G	0	1	0	1/3300

Table 4 Comparison of theory and test for girders

Test Girders	δ_u (mm)	Theoretical				
		Lateral Buckling Strength		Ultimate Bending Strength		
		Residual Stress Patterns		Residual Stress Patterns		
		(A)	(B)	(C)	(D)	
G-A	43.6	87.55	56.63	1.30	49.82	1.14
G-B	41.0	33.32	31.22	2.13	44.90	1.13
G-C	64.4	69.13	68.75	1.07	68.23	1.06
G-D	63.4	96.06	83.60	1.00	73.87	0.91
G-E	94.8	114.16	93.83	0.99	81.35	0.94
G-F	105.1	137.99	99.31	0.93	82.40	0.78
G-G	65.5	67.60	67.10	1.02	64.62	1.02

* Upper line is for δ_u indicated in Table 2

** Lower line is for infinitesimal small u_0 as $u_0 = L_e/10,000$

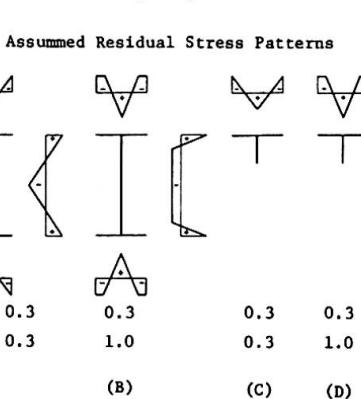

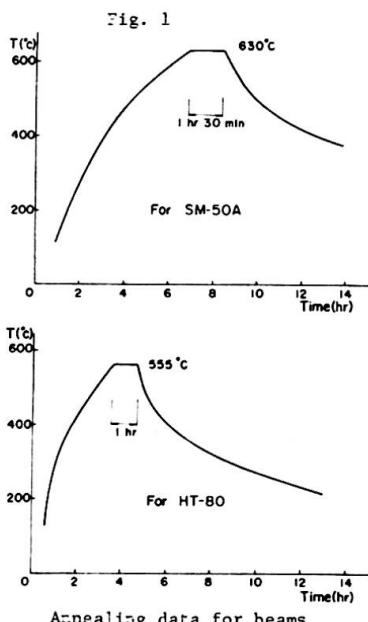
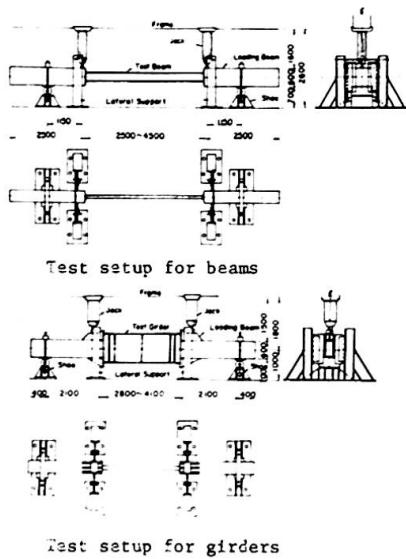


Fig. 2

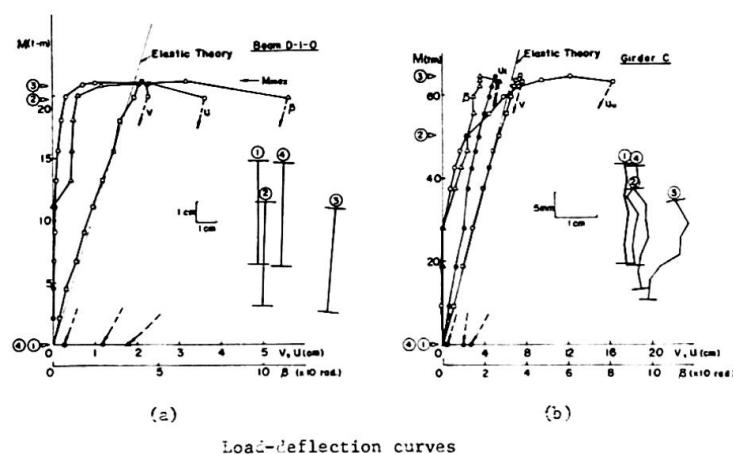


Fig. 3

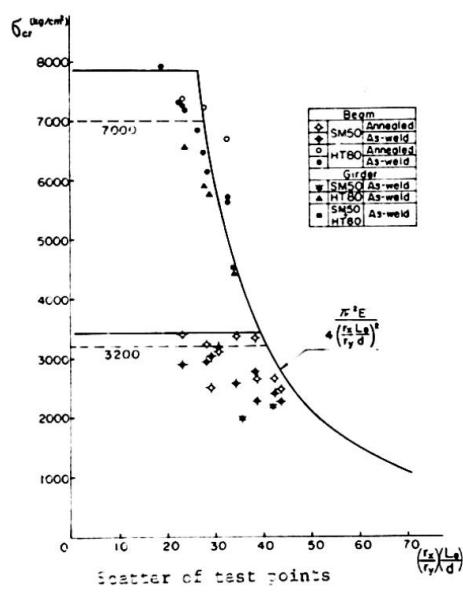


Fig. 4

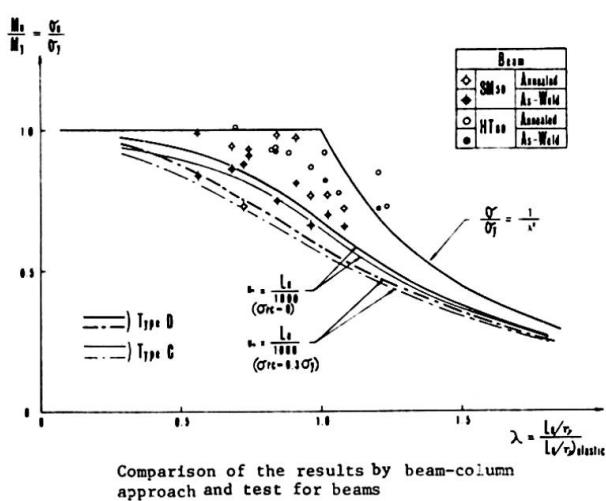


Fig. 5

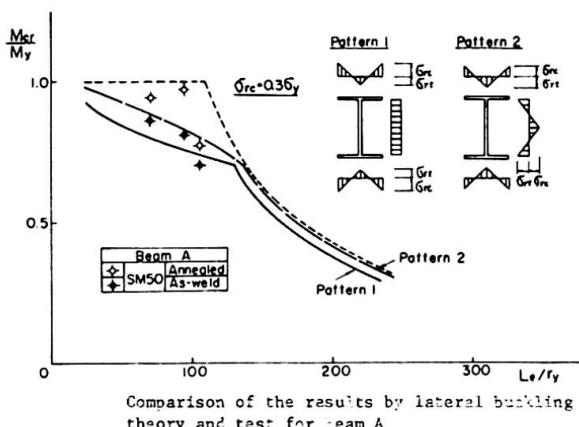


Fig. 6

REFERENCES

- 1) Fukumoto, Y. and Kubo, M., "Lateral Buckling Strength of Girders with Bracing Systems", Preliminary Report, 9th Congress IABSE, Amsterdam, 1972.
- 2) Fukumoto, Y. and Kubo, M., "Lateral Buckling of Braced Beams", Trans. of Architectural Institute of Japan, No. 206, April, 1973.
- 3) Fukumoto, Y., Fujiwara, M. and Watanabe, N., "Inelastic Lateral Buckling Tests on Welded Beams and Girders", Proc. of Japan Society of Civil Engineers, No. 189, May, 1971.
- 4) Fukumoto, Y., et al, "Research Works on Ultimate Strength of Plate Girders, and Japanese Provisions on Plate Girder Design, "Design of Plate and Box Girders for Ultimate Strength", IABSE Colloquium, Proc. Volume II, London, 1971.
- 5) Fukumoto, Y. and Kubo, M., "Ultimate Bending Strength of Plate Girders with Longitudinal Stiffeners failed by Lateral Instability", to be published from Der Stahlbau.
- 6) Basler, K. and Thürlmann, B., "Strength of Plate Girders in Bending", Journal of Structural Division, ASCE Vol. 87, No. ST 6, August, 1961.
- 7) Yoshida, H., "Lateral Buckling Strength of Plate Girders", Publications, IABSE Vol. 35-II, 1975.

SUMMARY

This report presents the results of an extensive experimental investigation into the behaviour and strength of flexural members with high strength steels which are failed by lateral buckling. A total thirty-six beam-type and seven girder-type members is tested under uniform moment and moment gradient. Test results of as-weld and annealed specimens are compared with the inelastic lateral buckling theory with the specified residual stress patterns and also with the beam-column approach to ultimate bending strength using the effective compressive section with initial imperfections.

RESUME

Ce rapport présente les résultats d'essais détaillés sur le comportement de la résistance d'éléments en acier à haute résistance soumis à la flexion, et qui ont été détruits par déversement. Les essais de spécimens soudés et recuits ont été comparés selon la théorie du déversement, en fonction des contraintes résiduelles, ainsi que selon l'approche "poutres-colonnes" pour le moment fléchissant de rupture, considérant la section effectivement comprimée avec des imperfections initiales.

ZUSAMMENFASSUNG

Dieser Bericht enthält die Resultate einer ausführlichen experimentellen Untersuchung über das Verhalten und die Tragfähigkeit von Biegeträgern aus hochfesten Stählen, die durch Kippen zerstört wurden. Eine Gesamtheit von 36 Trägertypen und 7 Balkenträgern wurden unter konstanten, linear verlaufenden Biegemomenten getestet. Testresultate von geschweißten und spannungsarm geglühten Proben wurden mit der unelastischen Kipptheorie und den bezeichnenden Eigenspannungsverteilungen und ebenso mit einer Näherungsuntersuchung als exzentrischem Knicken verglichen, indem die effektiv zusammendrückenden Abschnitte mit anfänglichen Imperfektionen verwendet werden.