

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 11 (1980)

**Artikel:** Optimum design of metal structures by Backtrack-programming

**Autor:** Farkas, Jozsef

**DOI:** <https://doi.org/10.5169/seals-11319>

#### Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 15.08.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## VII

### **Optimum Design of Metal Structures by Backtrack Programming**

Dimensionnement optimal de constructions métalliques au moyen de la méthode de programmation „backtrack”

Optimalbemessung von Metallkonstruktionen mittels der Backtrack-Programmierungsmethode

JOZSEF FARKAS

Prof., Dr. techn.

Technical University

Miskolc, Hungary

#### **SUMMARY**

The backtrack method solves the nonlinear constrained function minimization problems by a systematical search procedure. This combinatorial discrete programming method can be successfully applied to optimization problems if the number of unknowns is not too large. In the optimum design of welded beams a substantial search reduction may be achieved. A simple numerical example shows that this method is also advantageous for educational purposes.

#### **RESUME**

La méthode „backtrack” donne la solution des problèmes de minimisation de fonctions nonlinéaires conditionnelles par procédé de recherche systématique. Cette méthode combinatoire de la programmation discrète est bien applicable aux problèmes d'optimisation, si le nombre des inconnues n'est pas trop grand. Dans le cas de poutres soudées, il est possible de réduire considérablement les pas de la recherche. Un simple exemple numérique illustre les avantages que cette méthode offre pour l'enseignement.

#### **ZUSAMMENFASSUNG**

Die Backtrack-Methode löst die nichtlinearen bedingten Funktionsminimierungsprobleme mit Hilfe eines systematischen Suchverfahrens. Diese kombinatorische diskrete Programmierungsmethode ist auf Optimierungsprobleme gut anwendbar, wenn die Anzahl der Unbekannten nicht sehr gross ist. Im Falle von Schweißträgern kann man die Suchschritte wesentlich reduzieren. Ein einfaches Zahlenbeispiel zeigt, dass diese Methode auch für Unterrichtszwecke vorteilhaft ist.

## 1. THE BACKTRACK PROGRAMMING METHOD

The general exposition of backtrack was given among others by GOLOMB and BAUMERT [4]. This method was applied to welded girder design e.g. by ANNAMALAI, LEWIS and GOLDBERG [1]. SZABÓ [5] has used it for the minimum cost design of hybrid I-beams. The backtrack method solves the constrained function minimization problems by a systematical search procedure. A partial search is carried out for each variable and, if the possibilities are exhausted, then a backtrack and a new partial search is performed. In the optimum design of welded beams a substantial search reduction may be achieved by utilizing the fact that, in most cases, the cost function becomes maximum if the variables take their maximum values. Thus, the optimum solution can be found by decreasing the variables.

We should search for a vector of variables  $\underline{x} (x_1, x_2, \dots, x_n)$  for which the cost function will be minimal:  $C(\underline{x}) \rightarrow \min$  and which satisfies the design constraints:  $g_j(\underline{x}) \geq 0$  ( $j=1 \dots p$ ). The series of discrete values of variables are determined by  $x_{i\min}$ ,  $x_{i\max}$  and by the constant steps  $\Delta x_i$  between them. The flow diagram of backtrack for three variables is given in Fig.1. The main phases of the calculation are described as follows.

1/ With constant values of  $x_{2\max}$  and  $x_{3\max}$  the minimum  $x_{1m}$  value is searched which still satisfies the design constraints. For the sake of simplicity we use further on the notation  $x_{1m}=x_1$ . The search may be more efficient by using the interval halving procedure. First,  $x_{1\min}$  value is proved. If  $x_{1\min}$  dissatisfies the requirements, the interval  $x_{1\max}-x_{1\min}$  is halved. For the halving method it should be  $x_{i\max}-x_{i\min} = \Delta x_i \cdot 2^q$  where  $q$  is an integer.

2/ Similarly to the first phase, the minimum  $x_{2m}=x_2$  value is determined by means of halving process, which satisfies the design constraints.

3/ In order to obtain the next  $x_3$ -value, we do not use the interval halving method. In general,  $x_3$  may be easily expressed from the equation  $C(x_1, x_2, x_3) = C_0$ , so this will be the next  $x_3$ -value. Thus, for the series of  $x_3$ -values it is not necessary to prescribe the condition  $x_{3\max}-x_{3\min} = \Delta x_3 \cdot 2^q$ . Regarding the next  $x_3$ -value three cases may occur as follows.

3a/ If  $x_3 > x_{3\max}$ , we take  $x_3 = x_{3\max}$  and decrease it step-by-step till  $x_{3m}$  which satisfies the constraints or till  $x_{3\min}$ . Then the first partial search region is exhausted and we must backtrack to  $x_2$ . If  $x_2 < x_{2\max}$ , we continue the calculation with  $x_2 + \Delta x_2$ ; if  $x_2 = x_{2\max}$ , we backtrack to  $x_1$ .

3b/ If  $x_3 < x_{3\min}$ , we backtrack to  $x_1$ .

3c/ If  $x_{3\min} < x_3 < x_{3\max}$  and  $x_3$  dissatisfies the constraints, we backtrack to  $x_2$ . If the constraints are satisfied, we continue the calculation according to 3a.

The simplicity of the method enables us to apply it in the education as well. The following numerical example shows that the steps of the calculation can be easily followed by a pocket calculator.

## 2. NUMERICAL EXAMPLE

The cross section area of a welded I-section subjected to bending and compression should be minimized. The objective function is

$$C = A = ht_w + 2A_f \quad (1)$$

$h = x_1$  web height,  $t_w = x_2$  web thickness,  $A_f = x_3$  area of a flange. The constraint of maximum stress ( $g_1$ ) is

$$\sigma_M + \sigma_N \leq R_u \quad (2)$$

where  $\sigma_M = M/W_x$ ; the section modulus  $W_x \approx h(A_f + ht_w/6)$   $(3)$

and  $\sigma_N = N/A$   $(4)$

$M$  and  $N$  are the factored bending moment and compressive force, respectively,  $R_u$  is the limit stress (ultimate resistance).

The constraint of web buckling ( $g_2$ ) for steels of tensile strength 370 MPa may be expressed as [3]

$$\frac{h}{t_w} \leq 145 \sqrt{\frac{(1 + \sigma_N/\sigma_M)^2}{1 + 17(\sigma_N/\sigma_M)^2}} \quad (5)$$

Take  $M = 320$  kNm,  $N = 128$  kN,  $R_u = 200$  MPa. The lists of discrete values are as follows (cm, cm<sup>2</sup>):  $h_{\min} = 66$ ;  $h_{\max} = 74$ ;  $\Delta h = 2$ ;  $t_{w\min} = 0,5$ ;  $t_{w\max} = 0,9$ ;  $\Delta t_w = 0,1$ ;  $A_{f\min} = 14$ ;  $A_{f\max} = 22$ ;  $\Delta A_f = 1$ . Thus, the total number of combinations is  $5 \cdot 5 \cdot 9 = 225$ . The steps of the calculations are shown in Table 1. It can be seen that the backtrack method requires only 37 tests to obtain the following optimal values:  $h = 70$  cm;  $t_w = 0,6$  cm;  $A_f = 18$  cm<sup>2</sup>.

Note that a significant search reduction can be achieved by using



first a coarse scale of discrete values (larger  $\Delta x_i$ ) and then continuing with smaller  $\Delta x_i$  values in a smaller region near the optimum found in first phase.

### 3. APPLICATIONS

We have carried out calculations with a Fortran program of backtrack method for the following optimization problems.

- 1/ Optimum design of compressed columns of constant welded square box cross section by using the author's calculation method published in [2] (2 unknowns).
- 2/ Minimization of cross section area of welded I-sections subjected to bending and compression (4 unknowns). The application of these suboptimized I-sections to the elastic minimum weight design of frames was demonstrated by a numerical example in [3]. This numerical example was calculated as a problem with 8 unknowns as well.
- 3/ Minimum cost design of welded homogeneous and hybrid I-beams, simply supported and uniformly loaded (4 unknowns). In the objective function the costs of materials, welding and painting were taken into account. The lowering of flange thickness with a welded splice was also considered [3], [5].

### REFERENCES

1. ANNAMALAI,N.,LEWIS,A.D.M.,GOLDBERG,J.E.: Cost optimization of welded plate girders.- J.Struct.Div.Proc.ASCE 98 (1972) No.ST10, p.2235-2246
2. FARKAS,J.: Optimum design of compressed columns of constant welded square box cross section... Acta Techn.Hung. 84(1977)No.3-4. p.335-348
3. FARKAS,J.,SZABÓ.L.: Optimum design of beams and frames of welded I-section by means of backtrack programming.- Acta Techn.Hung. 91 (1981) (to be published)
4. GOLOMB,S.W.,BAUMERT,L.D.: Backtrack programming.- J.Assoc.Comput. Machinery 12 (1965) p.516-524
5. SZABÓ,L.: Optimum design of hybrid I-beams. Ph.D.Dissertation (in Hungarian). Techn.Univ. Miskolc, 1978

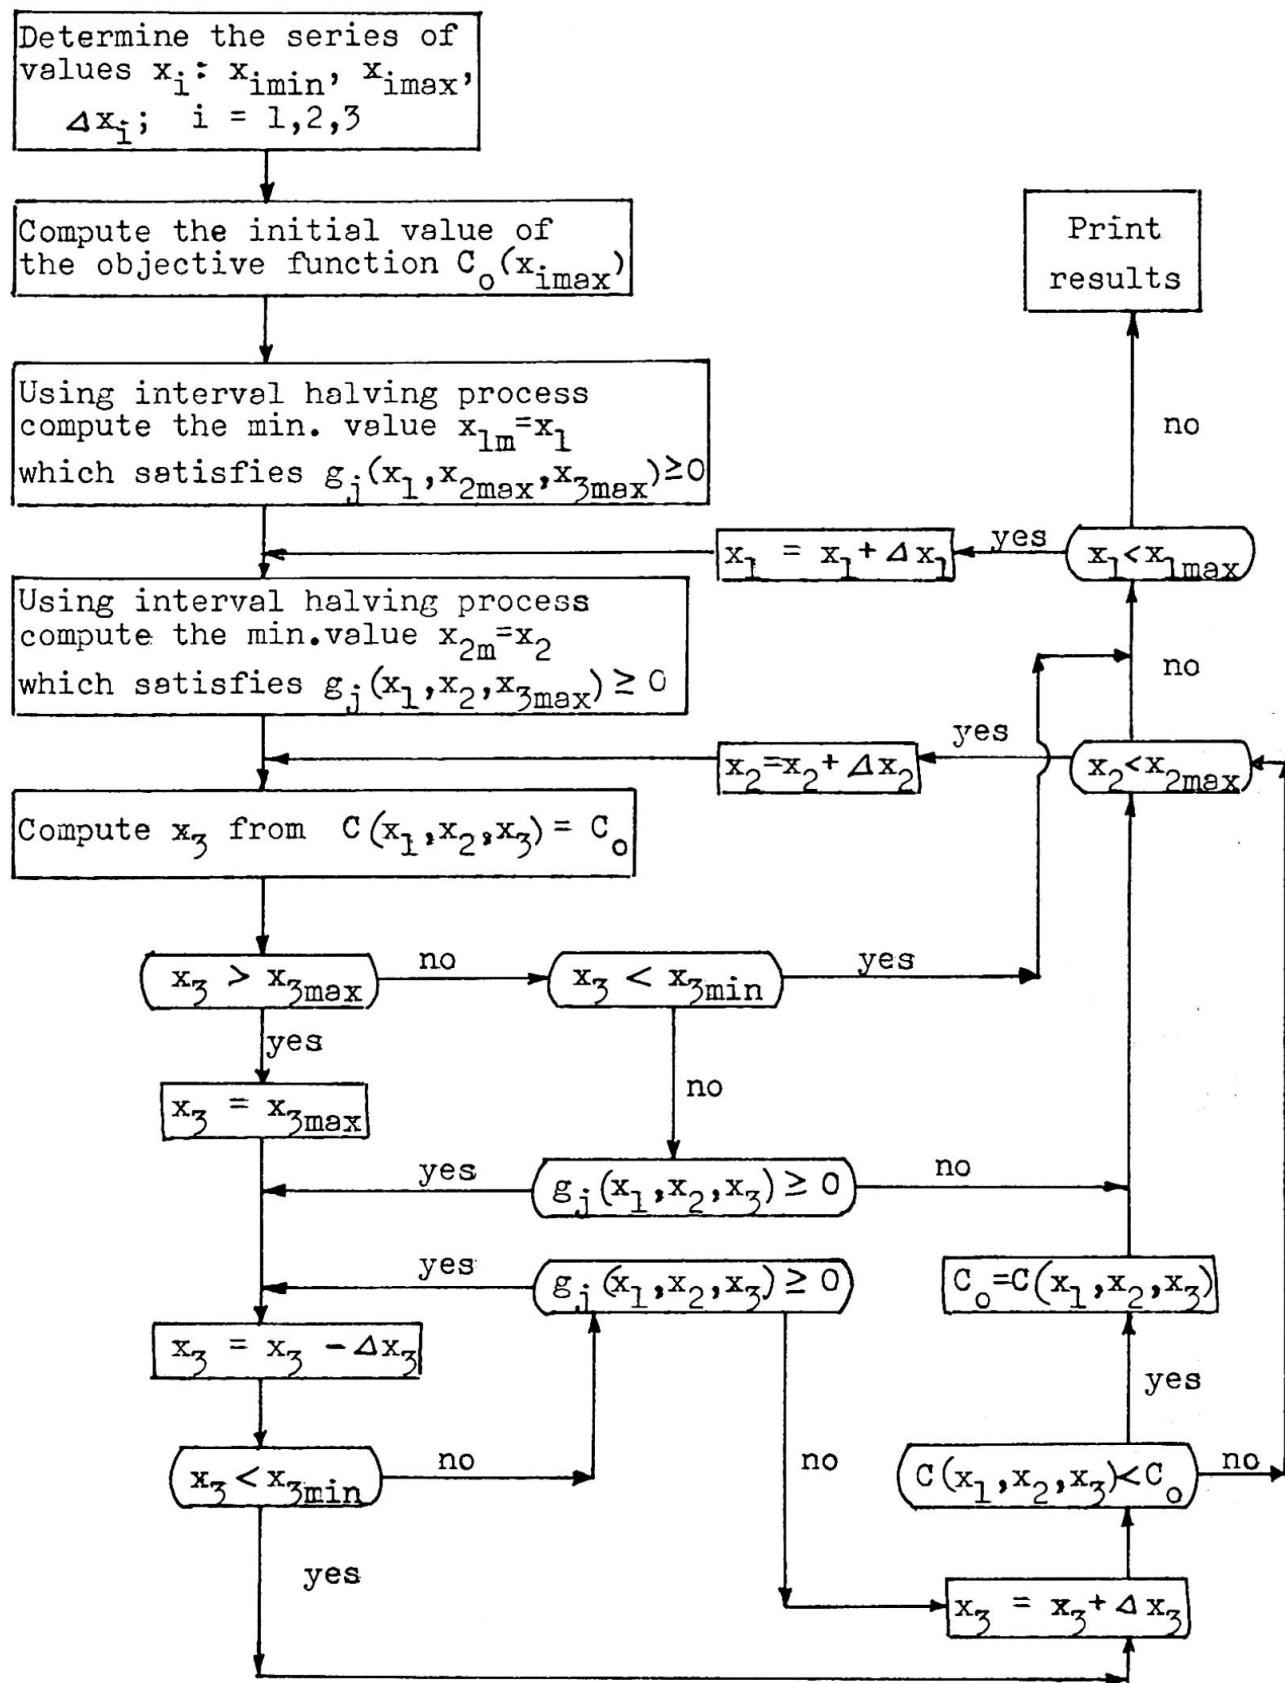


Fig.1 Flow chart for the backtrack programming

**Table 1.** Numerical example illustrating the steps of backtrack method in the case of three unknowns. Notation: + satisfies, - dissatisfaction

$x_1$ (cm)	$x_2$ (cm)	$x_3$ (cm <sup>2</sup> )	C (cm <sup>2</sup> )	$g_1$ Eq. (2)	$g_2$ Eq. (5)	Comments
74	0,9	22	110,6	+	+	$C_o = 110,6 \text{ cm}^2$
66	0,9	22	103,4	+	+	$x_{1\min}$ satisfies, it is not necessary to use the halving process for $x_1$ , only for $x_2$
66	0,5	22	77,0	+	-	
66	0,7	22	90,2	+	+	
66	0,6	22	83,6	+	+	
66	0,6	22	83,6	+	+	$x_3 = (110,6 - 66 \cdot 0,6) / 2 = 35,5 > x_{3\max}; C_o = 79,6$
66	0,6	21	81,6	+	+	
66	0,6	20	79,6	+	+	
66	0,6	19	77,6	-	+	backtrack with $x_2$
66	0,7	16	78,2	-	+	$x_3 = (79,6 - 66 \cdot 0,7) / 2 = 16,7$
66	0,8	13				$x_3 < x_{3\min}$ , backtrack with $x_1$
68	0,9	22	105,2	+	+	halving process for $x_2$
68	0,5	22	78,0	+	-	
68	0,7	22	91,6	+	+	
68	0,6	22	84,8	+	+	
68	0,6	19	78,8	+	+	$x_3 = (79,6 - 68 \cdot 0,6) / 2 = 19,4$
68	0,6	18	76,8	-	+	$C_o = 78,8$ ; backtrack with $x_2$
68	0,7	15	77,6	-	+	$x_3 = (78,8 - 68 \cdot 0,7) / 2 = 15,6$
68	0,8	12				$x_3 < x_{3\min}$ , backtrack with $x_1$
70	0,9	22	107,0	+	+	halving process for $x_2$
70	0,5	22	79,0	+	-	
70	0,7	22	93,0	+	+	
70	0,6	22	86,0	+	+	
70	0,6	18	78,0	+	+	$x_3 = (78,8 - 70 \cdot 0,6) / 2 = 18,4$
70	0,6	17	76,0	-	+	$C_o = 78,0$ ; backtrack with $x_2$
70	0,7	14	77,0	-	+	$x_3 = (78,0 - 70 \cdot 0,7) / 2 = 14,5$
70	0,8	11				$x_3 < x_{3\min}$ , backtrack with $x_1$
72	0,9	22	108,8	+	+	halving process for $x_2$
72	0,5	22	80,0	+	-	
72	0,7	22	94,4	+	+	
72	0,6	22	87,2	+	-	
72	0,7	13				$x_3 = (78,0 - 72 \cdot 0,7) / 2 = 13,8 < x_{3\min}$ , backtrack with $x_1$
74	0,9	22	110,6	+	+	halving process for $x_2$
74	0,5	22	81,0	+	-	
74	0,7	22	95,8	+	+	
74	0,6	22	88,4	+	-	
74	0,7	13				$x_3 = (78,0 - 74 \cdot 0,7) / 2 = 13,1 < x_{3\min}$ $x_1 = x_{1\max}$ ; results: $C_{omin} = 78,0$ $x_1 = 70$ ; $x_2 = 0,6$ ; $x_3 = 18$