

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 11 (1980)

Artikel: Inkeroinen Bridge

Autor: Järvenpää, Esko

DOI: <https://doi.org/10.5169/seals-11361>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 16.01.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

INKEROINEN BRIDGE

SUUNNITTELUKORTES OY

FINLAND

ROADS AND WATERWAYS ADMINISTRATION OF FINLAND

CLIENT

Roads and Waterways Administration, Helsinki, Finland

Chief of Bridge Construction Division, Jukka Rönkä, Chief eng.

Chief of Bridge Design Division Yrjö Punnonen, Chief eng.

Chief of Control Division Erkki Isokkala, Civ. eng.

CONTRACTOR

Zeato Oy

SUBCONTRACTORS

Steka Oy

Jännitetty Betoni Oy

DESIGNER

Suunnittelukortes Oy
Consulting Engineers
Pikisaarentie 13
90100 Oulu 10, Finland



The existing steel truss bridge
Spans: 70.0 + 10.4 + 10.4 + 10.4 + 10.4 m
Width: 5.2 + 5.2 + 5.2 + 5.2 + 5.2 m
Completed: 1925

REBUILDING OF THE INKEROINEN BRIDGE

To increase the capacity of the Inkeroinen bridge and improve the level of service Roads and Waterways Administration made a decision to renew it under a tight schedule.

Based on technical and economic studies and further on the central location of the bridge the following design criteria were achieved:

- the bridge was to be built in the same position as the old
- wherever possible the existing bridge foundations were to be used
- provision was to be made for the canalization of the Kymi river

Solution

The bridge is a continuous composite girder bridge (steel girdes and reinforced concrete deck).


Beams are of weathering steel with erosion factor of 0.5 mm on each surface. The steel structure is so designed that the side span can be cut and connected to an openable bridge when canalization occurs.

At the intermediate supports the web of the beams is 2400 mm high and 18 mm thick. Height-span ratio is 1/28.


The deck was casted without construction joints using retardants.

In existing pillars the old bearing seatings were removed and new heavily reinforced ones casted in their place.

Costs approx.	2170 Fmk/m
4.1 million Fmk	
Steel Structure	273000 kg 145 kg/m
Deck Concrete	585 m 0.31 m /m
Deck Reinforcement	136000 kg 230 kg/m
Foundation Concrete	188 m
Foundation Reinforcement	13600 kg

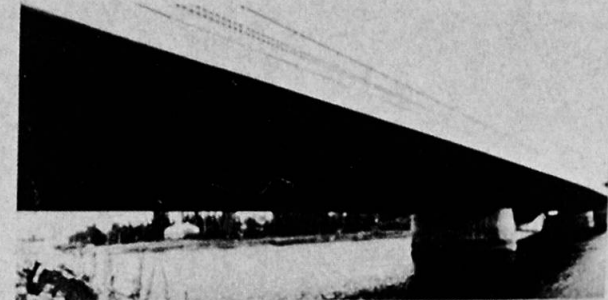


The New Bridge, a composite structure
Spans: 39 + 66.4 + 38 m
Width: 2.75 + 7.5 + 2.75 = 13.0 m

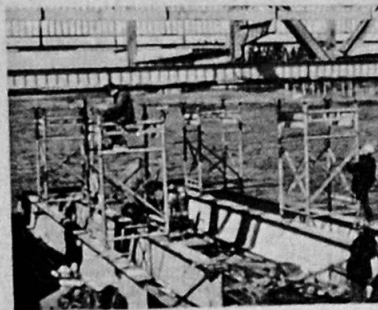


Demolishing of the old steel truss bridge in progress



Two of the old intermediate pillars were removed



Bearing seatings of remaining pillars were strengthened

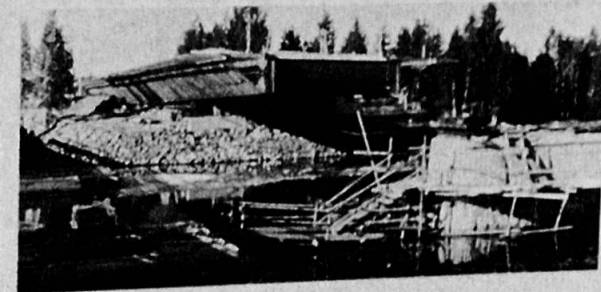

The steel structure was joined together on the river bank

BRIDGING CONDITIONS IN FINLAND


The most characteristic feature of Finnish geography is the multitude of shallow lakes and the natural beauty of the landscape. The area of our waters is 9.3 % of the whole surface of 337000 km².

An average of 200-300 bridges are built in Finland annually, of which 74 % are concrete bridges, 14 % steel bridges, 9 % wooden bridges and 4 % bridges of corrugated pipes.


The annual mean temperature of the country is +2 °C, the average day temperatures (July, January) varying from +22 °C to -18 °C.

The steel used in bridges must have high impact strength and the general requirement is 27 J at -30 °C.


Concrete is mainly carried out during the cold season.



Adjustment tensioning and grout injection in rock

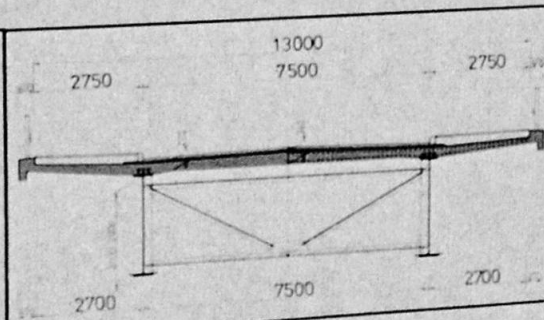

Superstructure cross-section

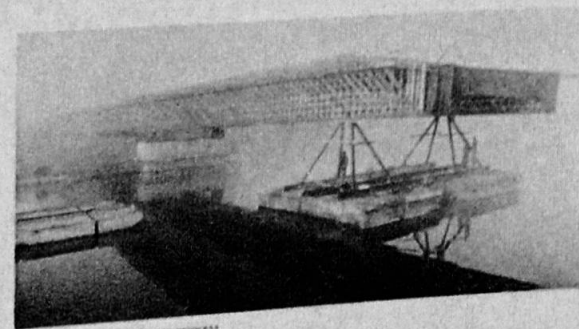

Bridge cantilever positioning in progress



INKEROINEN BRIDGE

Esko Järvenpää
M.Sc. in Struct.Eng.
Technical Manager
Suunnittelukortes Oy
Oulu, Finland

THE REBUILDING OF THE INKEROINEN BRIDGE

1. GENERAL

To increase the capacity of the Inkeroinen bridge and improve the level of service, RWA made the decision to renew it under a tight schedule. Based on technical and economic studies and further on the central location of the bridge the following design criterions were achieved.

- the bridge was to be built in the same position as the old,
- wherever possible the existing bridge foundations were to be used,
- provision was to be made for the canalization of the Kymi river.

2. SOLUTION

2.1 A Steel beam structure

The bridge is a continuous composite girder bridge (steel girders and reinforced concrete deck). The steel framework is formed of two parallel beams joined together by crossbeams at 6600 mm centres. Beams are of weathering steel with erosion factor of 0,5 mm on each surface. The steel structure is so designed that the side span can be cut when canalization occurs. At the intermediate supports the web of the beams is 2400 mm high and 18 mm thick. Height-span ratio is 1/28. The steel structure was jointed together on the river bank and pulled to its final position.

2.2 The Concrete Deck

Automatically welded bolts, ϕ 19 mm, serve to join the concrete to the steel. Thickness of deck slab between the beams is 210 - 340 mm. At the support in the negative moment area the amount of non-prestressed steel is over two percent of the deck cross-section because of crack-width limitations. The deck was casted without construction joints using retardants.

2.3 Foundations

The condition of the existing foundations was checked by core sampling. Two of the intermediate pillars were removed totally and in remaining pillars the old bearing seatings were removed and new heavily reinforced ones casted in their place. The abutments and the fixed bearing pillar were stressed with rock anchors to ensure a sufficient capacity. By using the existing foundations constructing in water was completely eliminated.

3. COSTS AND QUANTITIES

Costs of the project were approx. 4,1 Million Fmk.

Steel Structure	273000 kg	145 kg/m ²
Deck Concrete	585 m ³	0,31 m ³ /m ²
Deck Reinforcement	136000 kg	230 kg/m ³
Foundation Concrete	188 m ³	
Foundation Reinforcement	13600 kg	