

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 12 (1984)

Artikel: Thermal behaviour of multi-span viaduct in frame

Autor: Tanaka, Ryuichiro / Natsukawa, Kyosuke / Ohira, Takuya

DOI: <https://doi.org/10.5169/seals-12232>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 03.09.2025


ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Thermal Behaviour of Multi-Span Viaduct in Frame

Comportement thermique d'un viaduc en portique


Thermisches Verhalten eines statisch unbestimmten Rahmentragwerkes

Ryuichiro TANAKA
Senior Struct. Eng.
Chuo Fukken Consult.
Osaka, Japan

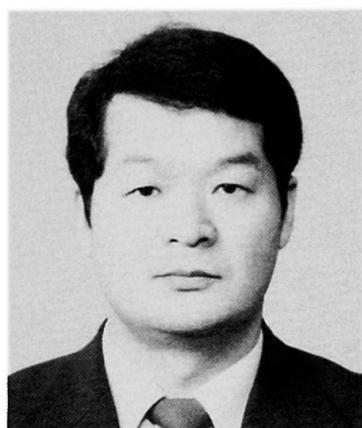

Ryuichiro Tanaka, born in 1948, graduated from Akashi National Technical College in 1969. He is now a Certified Consulting Engineer, working as a Senior Structural Engineer in the Railway Engineering Department.

Kyosuke NATSUKAWA
Division Chief
Chuo Fukken Consult.
Osaka, Japan

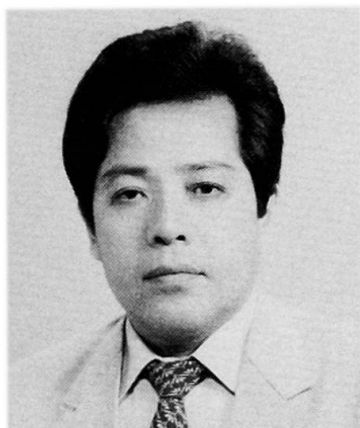

Kyosuke Natsukawa, born in 1943, got his degree of MSCE at Kanazawa University in 1968. He is now a Certified Consulting Engineer, working as a Division Chief in the Railway Engineering Department.

Takuya OHIRA
Managing Director
Nishimatsu Constr. Co.
Tokyo, Japan



Takuya Ohira, born in 1925, got his civil engineering degree in 1947. He worked for the Japanese National Railways and Japan Railway Construction Public Corporation for more than 30 years. He is now a Managing Director of Nishimatsu Construction Co.

SUMMARY

The authors designed an economical viaduct using a statically highly indeterminate frame with better moment distribution. The results of the in situ measurements on the structure over a period of one year show that the temperature expansion was successfully restrained and more material could be saved.

RESUME

Les auteurs ont réalisé, de façon économique, un viaduc en portique avec une haute hyperstaticité et une meilleure distribution du moment de flexion. Les résultats de mesures faites montrent que la dilatation causée par les changements de température est restée minime que de la matière aurait encore pu être économisée.

ZUSAMMENFASSUNG

Die Verfasser haben einen kostengünstigen Viadukt als statisch hochgradig unbestimmtes Rahmentragwerk mit einer günstigen Momentenverteilung entworfen. Die Messungen über ein Jahr haben ergeben, dass die Verformungen infolge der Temperaturschwankungen erfolgreich beschränkt werden konnten und noch mehr Materialersparnis hätte erreicht werden können.

1. INTRODUCTION

In Japan, reinforced concrete viaducts of frame are widely used for railway structures. The typical example is the viaduct for Shinkansen, the world famous bullet train line. Many concrete frame structures have been constructed because of their favorable moment distribution and lower cost.

The structures have normally expansion joints every 30-40m. To construct such structures economically, the authors designed a 400m-long viaduct based on the idea of a long continuous viaduct. See Fig. 1. and Photo 1.

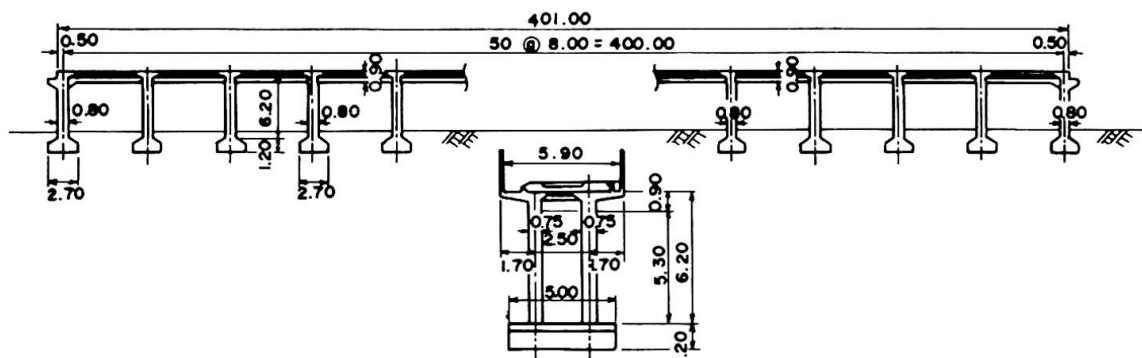


Fig. 1 General View



Photo 1. 50-span Concrete Viaduct

The basic concept of the long continuous viaduct comes from the following idea. It is well known that a long welded rail fixed on the track bed expands due to temperature change only in the end portions. Most of the expansion in the middle portion is restrained by the bed. See Fig. 2.

The application of the concept to the viaduct shows that an infinitely long viaduct could be constructed. The increased number of piers enhances the rigidity of the infrastructure, which results in the restraint of the superstructure expansion. The expansion of a viaduct longer than a certain length could be restrained to a constant value.

This paper reports on the long-term measurements of displacements and stresses of a reinforced concrete viaduct designed on the present concept and shows that the concept is applicable to the design of viaducts with possibly more economy.

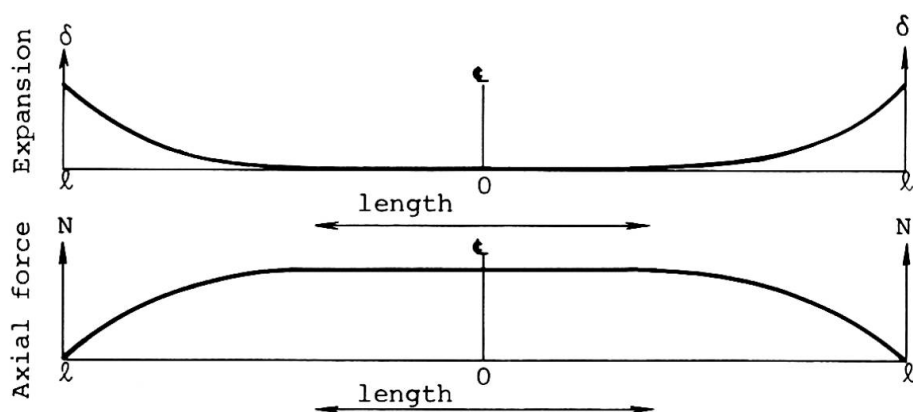


Fig. 2 Expansion, axial force and length of a long welded rail

2. DESIGN AND CONSTRUCTION

2.1 Fundamental tests

The tests of measurements necessary for the establishment of the design conditions were conducted on the following four items:

- (1) Temperature and displacement of the viaduct,
- (2) Model experiment and analysis of the designed viaduct,
- (3) Model experiment and analysis of the expansion transverse slit intervals for the expansion,
- (4) Horizontal load test applied to the foundation of an existing viaduct.

2.2 Design

The horizontal member of the viaduct is designed as a steel-reinforced concrete structure because of large horizontal forces.

The concrete strength of the columns in the end portions was made stronger by 20% to resist larger bending moment at the column ends.

The structure was analyzed elastically as a fifty-span frame taking axial deformation into account. The stress analysis was based on the allowable stress design method.

2.3 Construction

During the construction, the drying shrinkage of the concrete had to be reduced as less as possible. Using KOSAKA and MORITA'S theory, the authors estimated the amount of the shrinkage and determined that the concrete had to be placed sectionally over 3-4 spans and nine months later over the rest of the spans.

3. MEASUREMENT

3.1 Outline of measurement

The greatest difficulty in the design of the viaduct was how to deal with the large axial beam stress and column bending moment to restrain slab and beam expansion due to temperature change.

Since the main purpose of the measurement was to observe thermal behavior of the structure and identify factors preventing construction of a longer structure, the measurement was continued for one year after the construction completion and the results were studied in three periods. At the same time the crack measurement was also conducted. Table 1 shows the measured items.

Table 1 Measured Items

Surveyed items	Detail	Equipment
Weather observation	Atmospheric temperature	Thermocouple
Structural temp.	Concrete member temp.	Thermocouple
Structural displacement	Horizontal member displacement	Wire displacement meter
	Horizontal foundation displacement	Wire displacement meter
	Column displacement	Transit, plumb and cord
	Column rotation angle	Inclination meter
Stress	Reinforcement bar	Bar stress gauge
	Shape steel	Surface strain meter
	Concrete	Concrete non-stress meter
Structural soundness	Crack measurement	Crack scale
Concrete property	Compressive strength, Young's modulus	Dial gauge

3.2 Results of measurement

3.2.1 Atmospheric and member temperatures

Table 2 shows the atmospheric and structural member temperatures measured for one year. The measurement was conducted at 6:00 and 14:00. The member temperature means the average value of 12 measurements on the slabs and beams.

Some member temperatures exceeded the design limits of $\pm 10^{\circ}\text{C}$ from the average, but the measured values of stresses and expansions did not exceed the design limits, showing complicated relations between stresses, expansions and temperature change.

Table 2 Atmospheric and Member Temperature (Unit: $^{\circ}\text{C}$)

Measured time Item	Atmospheric tem.		Member tem.	
	6:00	14:00	6:00	14:00
Max. temperature	—	30.00	—	30.00
Min. temperature	-1.0	—	2.0	—
Temperature difference between max. and min.	31.0		28.0	
Annual average tem.	13.3	18.9	16.3	18.0
	16.1		17.2	
Difference between ave. and max.	13.6		12.8	
Difference between ave. and min.	17.1		15.2	

3.2.2 Relation between member temperature and expansion

Fig. 3 shows the relation between beam expansion and temperature expressed in terms of deviation from the annual average values, where the beam expansion is determined by the difference of displacements at the tops of two adjacent columns. Fig. 3a shows the relation in one of the end spans and Fig. 3b in the center span.

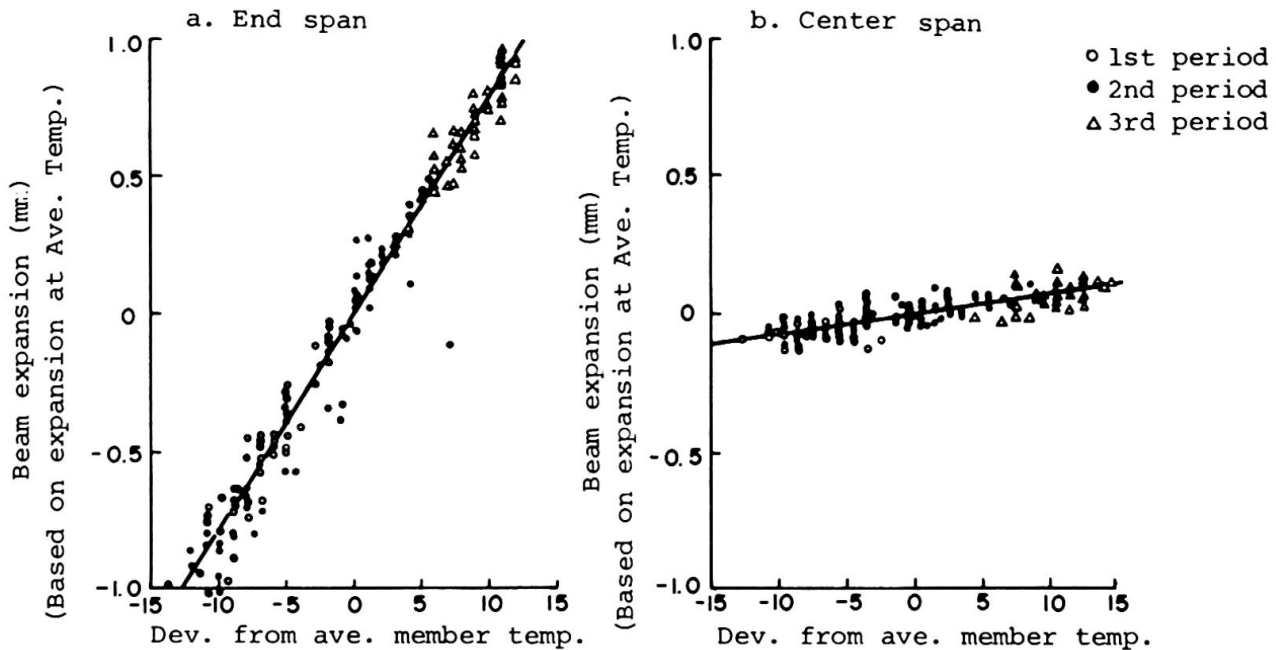


Fig. 3 Relation between beam expansion and member temperature

Fig. 3a and 3b clearly indicate the difference of expansion per unit temperature in the end span and center span, showing that the expansion in the center portion is very well restrained.

Fig. 4 illustrates the relation between the beam expansion at a temperature change of 10°C and the column position. The theoretical value based on the elastic theory is shown in the figure. The figure demonstrates accelerated restrain of the expansion towards the center of the structure. The measured values fall within the theoretical values. From the result it could be assumed that the columns in the end spans are supported elastically.

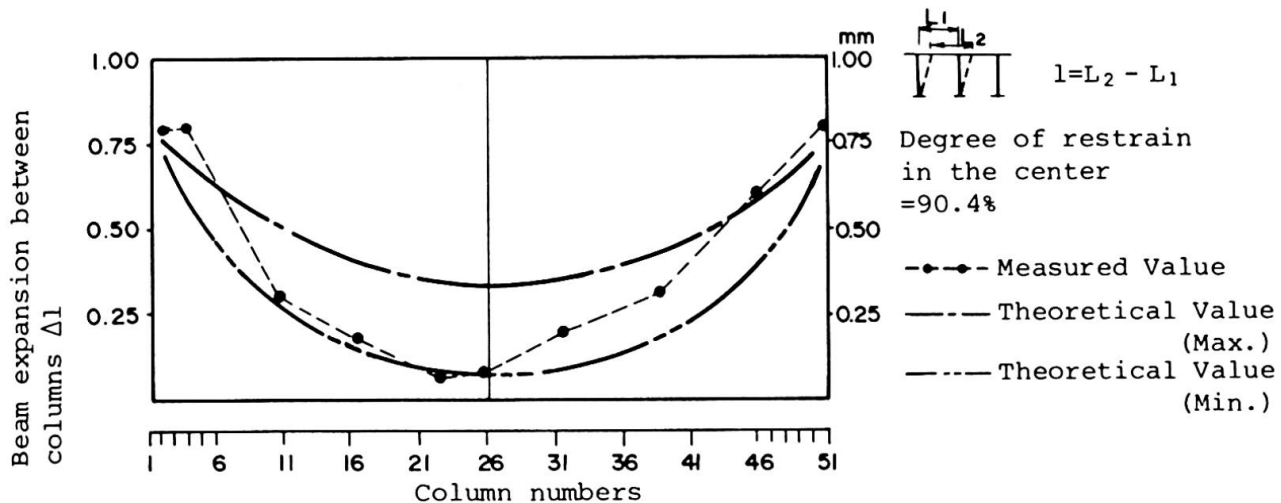


Fig. 4 Relation between beam displacement and column position ($t=10^{\circ}\text{C}$)

3.2.3. Force and moment

The axial force and the bending moment are calculated using the measured value. Fig. 5 and 6 show the measured values and the theoretical values(2) of the axial force and the column bending moment, falling within the theoretical limits.

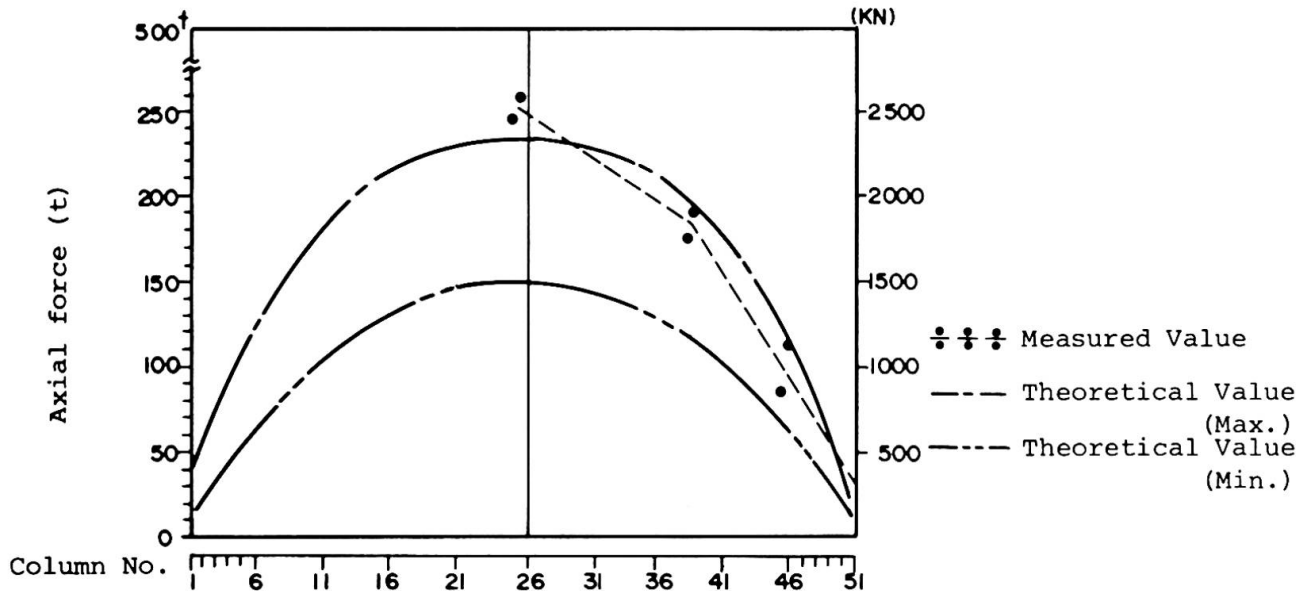


Fig. 5 Beam axial force (due to temp. difference 10°C)

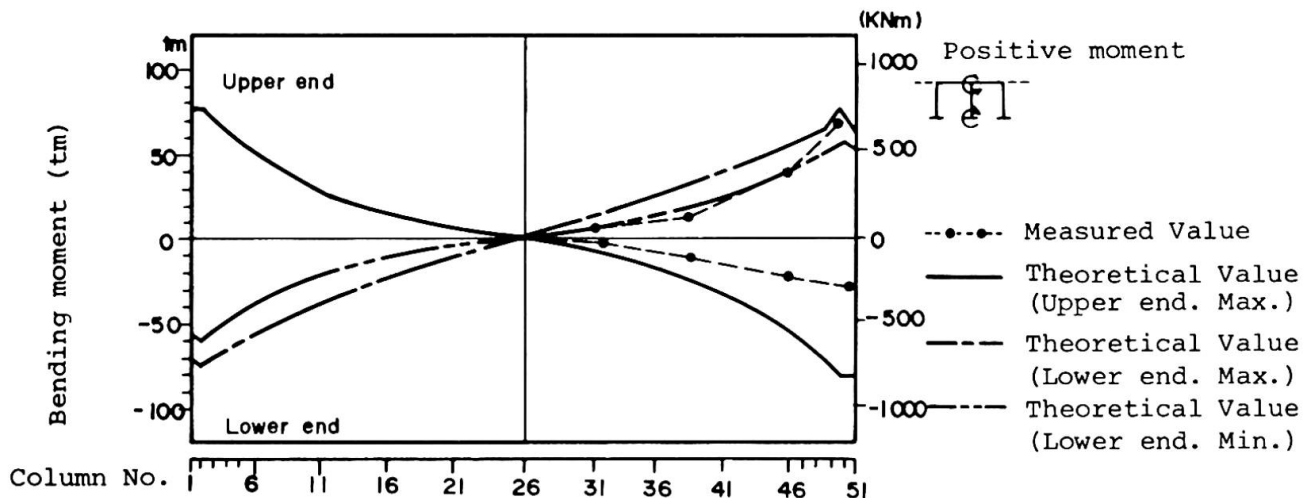


Fig. 6 Column bending moment (due to temp. difference 10°C)

3.2.4. Drying shrinkage

As explained in 2.3, concrete was partially placed nine months later. In the design, the shrinkage is assumed to finish 70% of the final value according to KOSAKA and MORITA'S theory(1) at the later concrete placement.

This assumption was verified by the stress measurement of steel bars conducted at the middle of the column height where the stress was not influenced by other factors.

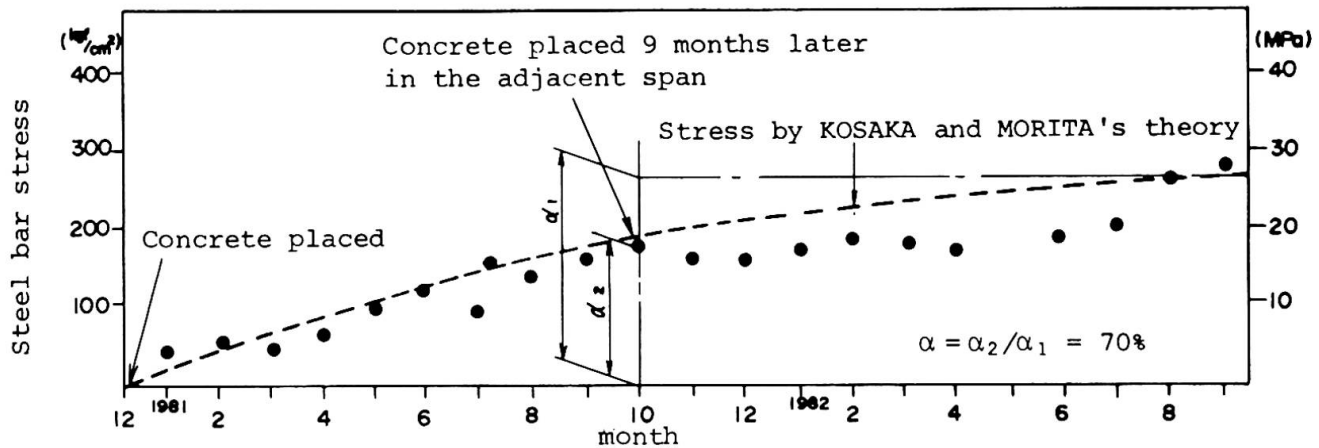


Fig. 7 Time variation of bar stress

3.2.5. Cracks

Fig. 8 shows crack development in the slabs and columns. These cracks developed mainly in winter because of the temperature shrinkage of the long and restrained structure. One year later, no further crack development was observed. More cracks developed in the center span which was restrained more strongly. The widths of the cracks were narrower than the 0.2mm cracks which were observed in the ordinary concrete viaduct and showed better durability of the structure.

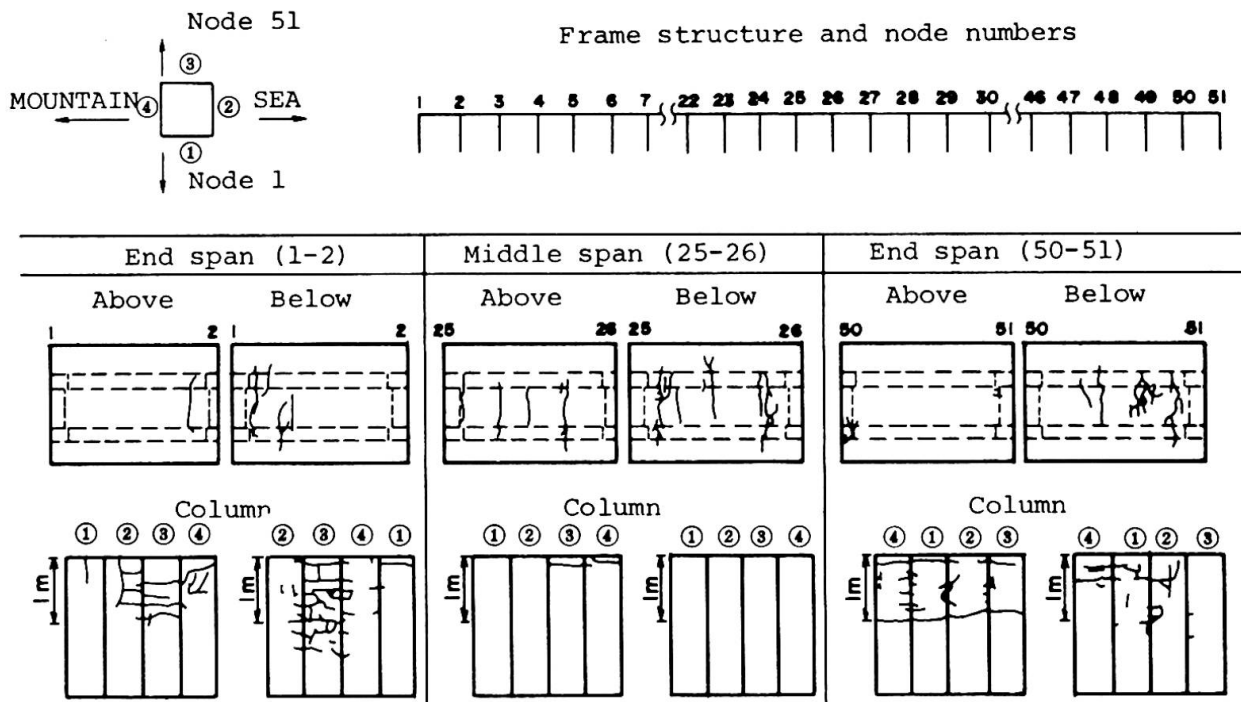


Fig. 8 Cracks in slabs and columns

4. SUMMARY OF THE MEASUREMENT

The results can be summarized as follows.

- (1) An application of the long welded rail concept

The temperature expansion of the 400m-long viaduct was restrained as much as 90.4% in the center span. This result shows that the concept of the

long welded rail can be applied effectively to the design of a long multi-span viaduct in frame.

(2) Concrete placement for the reduction of drying shrinkage

Concrete placement executed nine months later in every fourth or fifth span was successful for the reduction of the drying shrinkage. For the estimation of the drying shrinkage, KOSAKA and MORITA'S theory(1) is useful.

(3) Column support condition

The measurement shows that the columns are virtually supported by horizontal and rotational springs at the lower ends. The coefficients of the rotational and horizontal reactions estimated from the measurement agree with the results of a load test at the construction site.

(4) Material saving

The calculation based on the measurement shows that the reinforcement in some sections could be saved as much as 20%.

5. ACKNOWLEDGEMENT

The authors are grateful to Japan Railway Construction Public Corporation, the Superintendent of the project, for allowing them to publicize the data.

REFERENCES

- 1 Y. KOSAKA, and S. MORITA, Reinforced Concrete Structure. Maruzen, 1975, p.79 (in Japanese).
- 2 Study Committee of Structural Design Method in Special Environment, Report on the Study of Multi-span Viaduct. Kinki Branch of Japan Construction Consultants Association, 1982, p. 52 (in Japanese).