

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 12 (1984)

Artikel: Transverse prestressing of prestressed laminated wood bridge decks

Autor: Batchelor, B. deV. / Dalen, K. van / Taylor, R.J.

DOI: <https://doi.org/10.5169/seals-12256>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 04.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Transverse Prestressing of Prestressed Laminated Wood Bridge Decks

B. deV. BATCHELOR
Prof. of Civil Eng.
Queen's Univ.
Kingston, ON, Canada

K. Van DALEN
Prof. of Civil Eng.
Queen's Univ.
Kingston, ON, Canada

R.J. TAYLOR
Res. Eng.
Ontario MTC
Downsview, ON, Canada

A form of construction which is well suited to short span bridges is the nailed-laminated wood deck. However, experience has shown the load distribution of this type of deck is severely impaired with time due to rusting and ultimate failure of the nails. A method (1) has been developed for the rehabilitation of nailed laminated wood decks which involves introduction of transverse prestressing. This method has also been successfully applied to new construction. Initially, no standard method of design existed for such an application of prestress to wood systems and studies have been undertaken (1) to assess the behaviour of such systems and to determine the appropriate values of structural parameters for use in analysis and design. As shown in the figure, the details of the prestressing system vary depending on whether it is applied to rehabilitation of existing structures or to new construction. Typical details are provided in the Ontario Highway Bridge Design Code (2) which includes a section on prestressed wood systems.

Laboratory and field studies have been conducted on the system (1). The objective of the laboratory studies was the determination of orthotropic plate parameters and prestress losses. The main variables were type of wood (hem-fir, white pine and red pine), type of wood treatment and level of initial prestress. Tests were conducted on laminated beams and plates and on axially loaded prisms formed from laminates. The results of these investigations have also been reflected in the provisions of Reference (2).

The prestressed laminated wood deck lends itself to prefabrication. Its superior load distribution over that of existing conventional nailed laminated decks has been demonstrated (1) as shown in the figure. The Hebert Creek Bridge which was rehabilitated in 1976, has been monitored regularly, and has confirmed that the system is feasible and economical. This has also been confirmed at other sites in Ontario.

REFERENCES

1. Taylor, R.J., Batchelor, B.deV. and Van Dalen, K., "Prestressed Wood Bridges", Procs. International Conference on Short and Medium Span Bridges", Vol. 2, August 8-12, Toronto, Ontario, pp: 203-218.
2. Ontario Highway Bridge Design Code, Ontario Ministry of Transportation and Communications, Downsview, Ontario, 1983.

1118

TRANSVERSE PRESTRESSING OF LAMINATED WOOD BRIDGE DECKS

Existing Nailed Decks



Longitudinal Deck




Transverse Deck

Problems - Nails are susceptible to repeated loads causing delamination. This reduces load carrying capacity & life expectancy, and increases maintenance costs.



Typical X-section



Typical Delamination

Solution - Transverse Prestressing





KABAIGON R.(1981) Rehabilitation








SIoux NARROWS(1982) Deck Replacement

RESEARCH AND CONSTRUCTION




TEST RIG

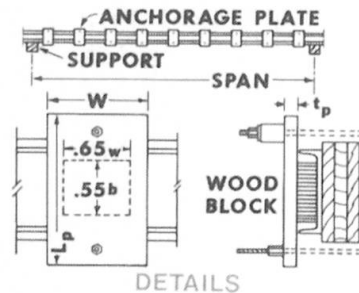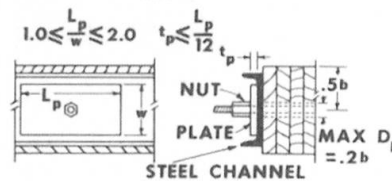

Load Testing



Herbert Crk. (1976)




Vertical Deflections Results - 100% Increase in Capacity

Other Applications



FOX LAKE Bridge
New prestressed laminated wood rigid frame. Built 1981, Sudbury, Ontario.

AGUASABON R. Bridge
New transversely laminated, prestressed wood. Segmental Construction. Terrace Bay, Ontario 1983.



VICTORIA ISLAND Bridge. Deck replacement with prestressed wood panels. Ontario Hydro Ottawa, 1984.

CONCLUSION - PRESTRESSED WOOD DECKS FEASIBLE