

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 12 (1984)

Artikel: Cable-stayed bridge with new Vierendeel Type girder

Autor: Nakayama, Yoshiaki

DOI: <https://doi.org/10.5169/seals-12258>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 03.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Cable-Stayed Bridge with New Vierendeel Type Girder

Yoshiaki NAKAYAMA

Nippon Kokan K.K.

Tokyo, Japan

An example of a two-dimensional section model in wind-tunnel.

The results of the experiments of spring-mounted section models on torsional oscillation.

Spring-mounted section models were stable against torsional oscillation. Flutter or vortex excited oscillation did not occur until the wind speed reached 110 m/s. This figure shows $V-\delta$ (wind speed --- logarithmic decrement) curves at the torsional double amplitude of 2° . For reference, $V-\delta$ curves for ordinary truss-type girders under the same conditions are also indicated.

The maximum and minimum bending moments of a Vierendeel-type girder against the changes in parameter K when a uniform load of 1.0 t/m is applied to the full span. The cross-sectional area of the girder $A = 0.240 \text{ m}^2$, the moment of inertia $I = 8.5054 \text{ m}^4$; A_t of the main tower = 0.780 m^2 ; I_t of the main tower = 7.250 m^4 ; A_c of cable = 0.01893 m^2 (average); and the overall length of the girder $L = 884 \text{ m}$.

$$K = EI/L^2EcAc$$

The characteristics of the changes in maximum and minimum bending moments due to the changes in the flexural rigidity of the girder K , are illustrated. When K is smaller than $10^{-3} \sim 10^{-4}$, the changes in the bending moment are not so remarkable.

The characteristics of the flexural rigidity of a Vierendeel-type girder observed when the flexural rigidity of the vertical members of the girder is changed. When parameters α and β are used, the equivalent moment of inertia of the girder I_e is expressed by

$$I_e = 2I_o + \alpha A_o \left(\frac{H}{2} \right)^2$$




$$\beta = \frac{2I_o}{I_e} \times 100 (\%)$$

Where, I_o is the moment of inertia of upper and lower chord members, A_o is the cross sectional area of upper and lower chord members, H is the distance on centers of upper and lower chord members, and α is the equivalent section coefficient.

The design concept when the vertical members of a Vierendeel-type girder are connected to a box girder.

The vertical members receive both the bending moment action as the stiffening girder in the plane of the girder and the deformation resisting action of the cross section of the whole stiffening girder in the plane at transverse direction to the plane of the girder. Therefore, the connection between a vertical member and a box girder must be rigid and secure.


CABLE-STAYED BRIDGE WITH NEW VIERENDEEL TYPE GIRDER

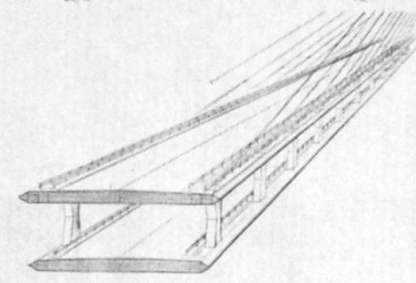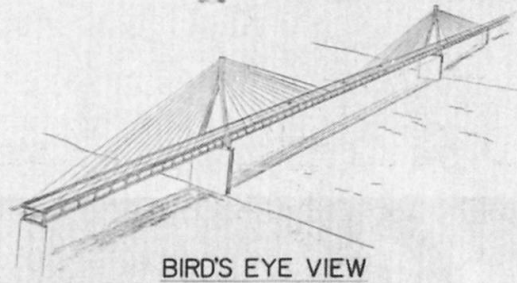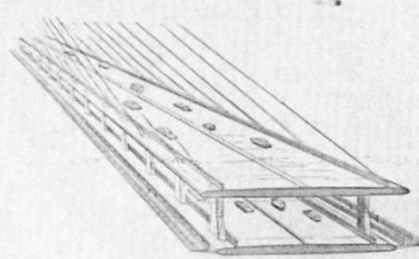


BIRD'S EYE VIEW




PERISTYLE VIEW

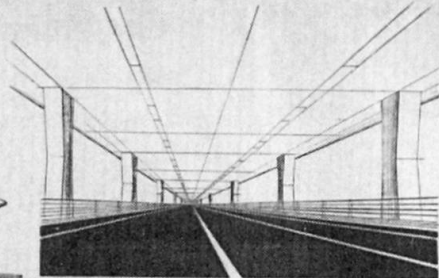


FRONT VIEW

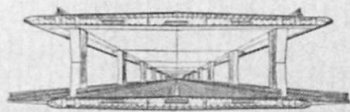



STRUCTURE OF TWO DECKS

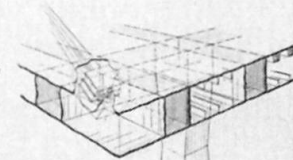



A THE VERTICAL MEMBERS ARE RIGIDLY CONNECTED TO A BOX GIRDER.



ORDINARY TRUSS-TYPE

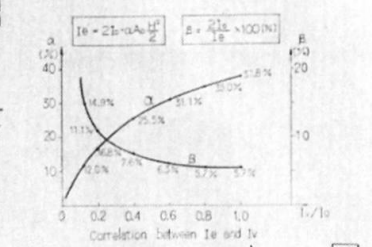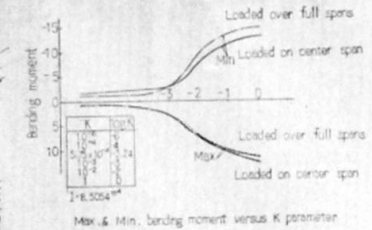

B THE CHARACTERISTICS OF THE FLEXURAL RIGIDITY OF A VIERENDEEL-TYPE GIRDER.

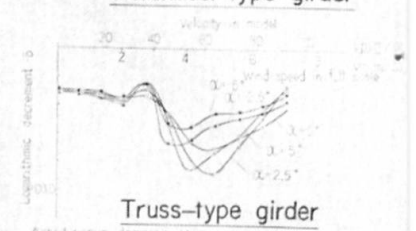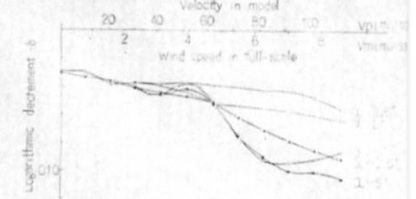

C AN EXAMPLE OF A TWO-DIMENSIONAL SECTION MODEL TEST IN WIND-TUNNEL.