

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 12 (1984)

**Artikel:** Metro Manila Light Rail Transit System, Philippines

**Autor:** Matt, P.

**DOI:** <https://doi.org/10.5169/seals-12269>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 22.02.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## **Metro Manila Light Rail Transit System, Philippines**

### **P. MATT**

Civil Eng.  
Losinger Ltd., VSL International  
Berne, Switzerland

The poster highlights some particular aspects of the design and construction of the elevated carriageway for the Metro Manila Light Rail Transit System. This public transportation system is located above the Rizal and Taft Streets which represent the main north-south traffic arterias. The total length of this structure is approx. 15 km and includes two end terminals, a central terminal, sixteen normal stations and a depot and maintenance area.

The finally adopted structural system was chosen based on a study comparing various options. In addition to a pure price comparison the following criterias had to be considered:



- Construction speed: a max. erection speed of one span/day was envisaged and subsequently achieved in practice.
- Quality and type of locally available labour, materials and equipment.
- Provisions against effects caused by stay currents (the railway system uses direct current).
- Provisions against earthquake actions.

The actual construction work started late 1981 and is today practically finished. In practice the selected design has proven to be very feasible.

# METRO MANILA LIGHT RAIL TRANSIT SYSTEM, PHILLIPPINES


 **metrorail**

RIZAL-TAFT LINE

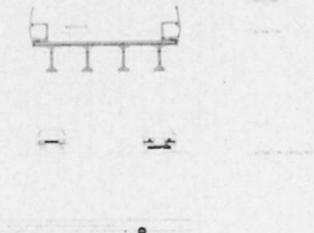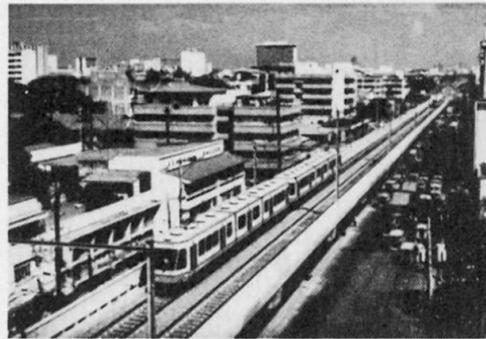


 **metrorail**

RIZAL-TAFT LINE



 **metrorail**

ISOMETRIC VIEW OF A TYPICAL CARRIAGEWAY SPAN

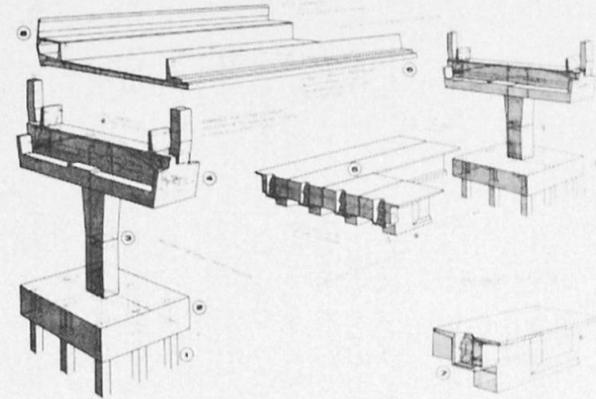

Within the scope of the design of the Metro Project -Provisions against Stray Currents on Reinforcing and Prestressing Steel, and -Seismic Design Criteria for the Typical Elevated on Line Stations- were taken into consideration. The isometric drawing shows the suggested protective measures against stray currents.

- Driven pretensioned P.C.C. piles with dimensions 406 x 406 mm up to 30 m long. In some areas bored piles had to be used. Under each pier 9 piles at 1.50 m centers were used.  
Load per pile: vertical max. 130 tons / min. 4 tons (metric);  
horizontal 11 tons (metric)
- The piles were analyzed for various conditions. Due to earthquake and corresponding vertical loads the piles are rigidly fixed in the pile cap and actually supported by the soil.
- R.C. pile caps, R.C. columns and P.T. copings were made in cast-in-situ concrete.
- Superstructure, each span consisting of four post-tensioned P.C.C. girders with specially formed end-diaphragms for immediate swaying with "T-tops" and stressed together with one  $\varnothing$  bar dia. 32 mm. The girder length is varying from 22 m to 27 m.
- The cast-in-situ R.C. deck slab, thickness varying between 170 and 190 mm, has been analyzed acting as a compression member longitudinally and as a load distribution member transversally.
- End block detail of the post-tensioned P.C.C. girders showing the specially formed end-diaphragms.
- P.C.C. parapets acting as an acoustic protection of the neighbourhood.

Due to technical reasons and site conditions, structural design described above was clearly favoured to other solutions and proved to be the most economical solution.