

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 12 (1984)

Artikel: Transit guideways for the Toronto region

Autor: Dorton, R.A.

DOI: <https://doi.org/10.5169/seals-12274>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 22.02.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Transit Guideways for the Toronto Region

R.A. DORTON

Manager
Str. Office, MTC
Toronto, ON, Canada

H.N. GROUNI

Sr. Res. Engr.
MTC, Toronto
Toronto, ON, Canada

The Government of Ontario embarked on a major rapid transit project late in 1982, with the following key considerations:

- Provide a transit service along the Lakeshore through downtown Toronto between populated regions at either end.
- Linkup local transit networks to the main inter urban line.
- Develop City Centers by connecting them through a rapid transit line.
- Promote a home-based transportation technology.

The proposed system will offer rapid transit service in an exclusive right-of-way to about four million inhabitants in the regions between Hamilton and Oshawa. The total length of the project is about 200 km.

The service capacity of the system will be about 25,000 passengers per hour per direction, provided by trains of up to five vehicles, travelling at average speeds of 70 kph at 2 minute headways, between stations that are spaced at about 3 km. The top speed of the trains will be 120 kph.

The system will be state-of-the-art in advancement, comprising vehicles that are light-weight, driverless, electrically powered and automated. They will be operated from a central command and communications complex, with on-board computers. The vehicles will be propelled by rotary electric motors powered from an over-head supply system. They will utilize steerable trucks to minimize wheel and rail wear and squeeling on curves. In order to accommodate a large number of commuters, the vehicles are envisaged to be long, in the order of forty meters. They are to be with single articulation to enable them to negotiate tighter curves.

New design criteria were written to ensure economical and safe designs. The criteria were based on Limit States philosophy and were modelled after the Ontario Highway Bridge Design Code. The consequences of failure in a transit guideway dictated a safety level higher than that generally assigned for highway bridges. Thus, risk analysis resulted in load factors that reflected failure probabilities in guideways that are in the order of one tenth of those expected from bridges. Load combinations were based on probabilities of such loads occurring simultaneously together at expected intensity levels. Hence, permanent, transient and exceptional loads were combined in a logical manner, leading to optimum designs, economically and structurally.

TRANSIT GUIDEWAYS FOR THE TORONTO REGION

GOVERNMENT OF ONTARIO - ADVANCED LIGHT RAIL TRANSIT (GO-ALRT) - SYSTEM DATA

*NOMINAL CAPACITY:	25,000 PERSONS PER HOUR PER DIRECTION (PPHPD)			
*VEHICLE CONFIGURATION:	DUAL, 8-AXLE, 4 STEERABLE TRUCKS, 1 TO 5 VEHICLES/TRAIN 36.0 M LONG X 2.8 M WIDE, 124 SEATS, 204 STANDING			
*VEHICLE CAPACITY & WEIGHTS:	EMPTY	SEATED	SERVICE	CRUSH
PASSENGERS:	0	124	166	326
WEIGHT (KN):	555	604	670	780
*VEHICLE SPEEDS:	MAX. = 120 KM/H, OPERATING = 70 KM/H			
*ELECTRICAL POWER:	SUPPLY (25 KV-AC), MOTOR (600 V-DC, 8/VEHICLE), AUTOMATIC (NO OPERATOR)			
*TRAIN CONTROL:	1435 MM/115 # CONTINUOUSLY WELDED RAIL, DIRECT FIXATION ON SECOND POUR PLINTHS			



GUIDEWAY SELECTION CRITERIA


- *ECONOMY IN CONSTRUCTION AND MAINTENANCE
- *DURABILITY AND MAINTAINABILITY
- *COMPETITION BETWEEN MATERIALS AND ERECTION METHODS
- *SIMPLE STRUCTURAL SOLUTIONS
- *AESTHETICS IN URBAN ENVIRONMENTS
- *PROVEN SAFETY
- *FLEXIBILITY IN APPLICATIONS: SINGLE OR DUAL TRACK, SIMPLE OR CONTINUOUS SPANS

GUIDEWAY DESIGN CRITERIA

- *LIMIT STATES PHILOSOPHY AS IN THE 1983 ONTARIO HIGHWAY BRIDGE DESIGN CODE
 - SERVICEABILITY: FATIGUE - 6×10^6 CYCLES AT 80% CRUSH LOAD
 - VIBRATIONS - STRUCTURAL NATURAL FREQUENCY < 3.0 HZ
 - LOAD COMBINATIONS: PERMANENT + TRANSITORY + ONLY ONE MAXIMUM OF EXCEPTIONAL LOADS (DERAILMENT, BROKEN RAIL, EARTHQUAKE, COLLISION)
- *CALIBRATION: SAFETY INDEX, $\beta = 4.0$ (BRIDGES, $\beta = 3.5$). VARIABLE LOAD FACTORS = FUNCTION OF LOAD INTENSITY, DURATION, VARIABILITY & PROBABILITY OF OCCURRENCE IN COMBINATIONS
- *SPAN LENGTH LIMITED BY BROKEN RAIL PULL-APART GAP OF ≥ 60 MM
- *SAFETY: MULTI-LOAD PATH STRUCTURES, VEHICLE RETENTION (WALLS), LIMITED PULL-APART GAP

PRESTRESSED CONCRETE TWIN BOX



- *PRECAST (OR CAST-IN-PLACE), POST-TENSIONED INTO TWO-SPAN UNITS
- *SUPPORTED BY CONCEALED CROSS-HEADS
- *SINGLE OR DUAL TRACK
- *EASY MAINTENANCE
- *PIERS: FIXED (TYPE-A) AND EXPANSION (TYPE-B)

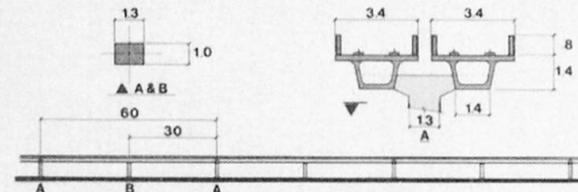

OPTION
'A'

STRUCTURAL STEEL WELDED SINGLE BOX


- *STEEL TYPE: CSA-G40-21 M (GRADE 350)
- *PREFABRICATED IN SINGLE OR MULTIPLE UNITS TWO OR THREE-SPAN UNITS
- *SUPPORTED ON SINGLE RECTANGULAR COLUMNS
- *PRECAST OR CAST-IN-PLACE DECK
- *NO FALSEWORK NEEDED
- *SINGLE OR DUAL TRACK
- *FLEXIBLE SPAN-LENGTH
- *EASY MAINTENANCE - NO EXPOSED BRACING
- *PIERS: ONE FIXED (TYPE-A) AND EXPANSION (TYPE-B)

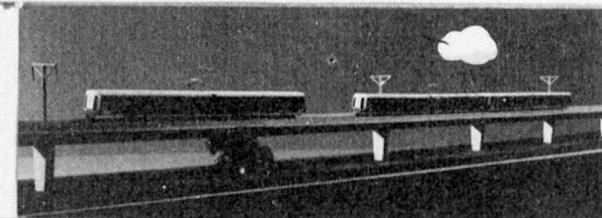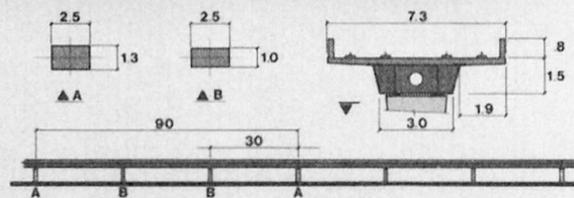

OPTION
'B'

CAST-IN-PLACE CONCRETE VOIDED SLAB

- *FAST CAST-IN-PLACE POST-TENSIONED CONSTRUCTION
- *SUPPORTED BY SINGLE ROUND INTERIOR COLUMNS
- *EASY MAINTENANCE
- *SINGLE OR DUAL-TRACK
- *FLEXIBLE SPAN-LENGTHS
- *THREE SPAN UNITS
- *TANGENT OR CURVED ALIGNMENT
- *PIERS: ONE OR TWO FIXED (TYPE-A) EXPANSION (TYPE-B)

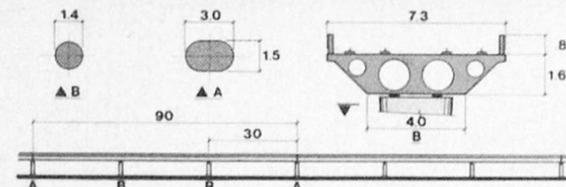

OPTION
'C'