

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 12 (1984)

**Artikel:** Development of NS Space Truss system

**Autor:** Kadono, Akio / Shiratani, Kunio / Uchida, Naoki

**DOI:** <https://doi.org/10.5169/seals-12296>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 10.08.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Development of NS Space Truss System

**Akio KADONO**  
 Manager  
 Nippon Steel Corp.  
 Tokyo, Japan

**Kunio SHIRATANI**  
 Senior Manager  
 Nippon Steel Corp.  
 Tokyo, Japan

**Naoki UCHIDA**  
 General Manager  
 Nikken Sekkei Ltd.  
 Osaka, Japan

**Ben KATO**  
 Prof. Dr. Eng.  
 Tokyo Univ.  
 Tokyo, Japan

### I. Prefabrication of Components

Bolt connection is adopted in this system in order to avoid site welding of steel pipes. Site welding requires a highly accurate set-up and skilled welders. In addition inspection is difficult. NS Space Truss system offers high accuracy and quality with reasonable cost by utilizing mass production techniques. For example, it takes less than a minute to automatically weld two end cones to a steel pipe in flat position. Because of accurate fit of the components, the system is easy to assemble on site.

### II. Bearing Capacity of the Node (see the diagram with the same title)

Bearing capacity of the node depends on load distribution as well as on its configuration.  $\beta$ -value represents load distribution. Mono-axial tests ( $\beta=0$ ) and bi-axial tests ( $\beta \neq 0$ , see photo) were done to define bearing capacity ratio. E.T. and P.T. are the calculated curve for a ring on elastic theory and on plastic theory respectively. Plotted points  $\oplus$   $\otimes$   $\times$  are the node test results and they are analogous to the calculated curve.

### III. Buckling Load of Pipe Members (see the diagram with the same title)

Pipe members and steel pipes of the same lot were loaded to failure. Normalized buckling loads and slenderness ratios are on the diagram.



Buckling loads of steel pipes agree well with the value given by AISC spec. formula, and buckling loads of pipe members are larger because of the following reasons;

- 1) Actual pipe member length is approximately 90% of its nominal length which is the distance between the center of the two nodes on both ends.
- 2) Both ends of pipe members are not free to rotate but are slightly restrained.

### IV. Frame Tests (see the right side of the poster)

Three specimens were loaded to failure to find exactly the stiffness and bearing capacity of frames. Configuration of the three specimens were the same. Target  $\beta$ -values (-1, 0, 1) were obtained by changing the location of loading points and supports. The load-displacement relations of specimens are shown on Results of Frame Test diagram with theoretical stiffness and loads, which were calculated on the assumption that joints are pin connections. Stiffness of the specimens agrees well with the theoretical one. Maximum load  $P_x$  is approximately twice as large as  $P_a$ , and is larger than  $P_c$ . Stress redistribution was observed through strain measurement of pipe members.  $P_a$  is the load at which the axial force of the pipe member with the highest stress of all reaches the allowable axial force defined by AIJ-code; This is true also for  $P_c$  and the buckling axial force obtained in the previous tests. (see III)

# DEVELOPMENT OF N.S. SPACE TRUSS SYSTEM

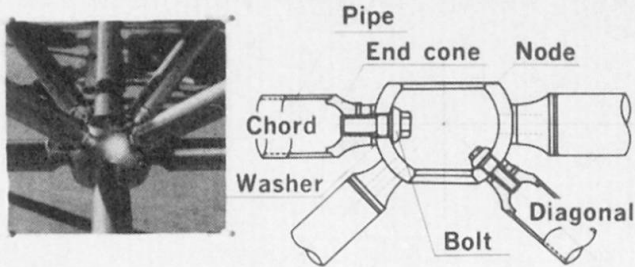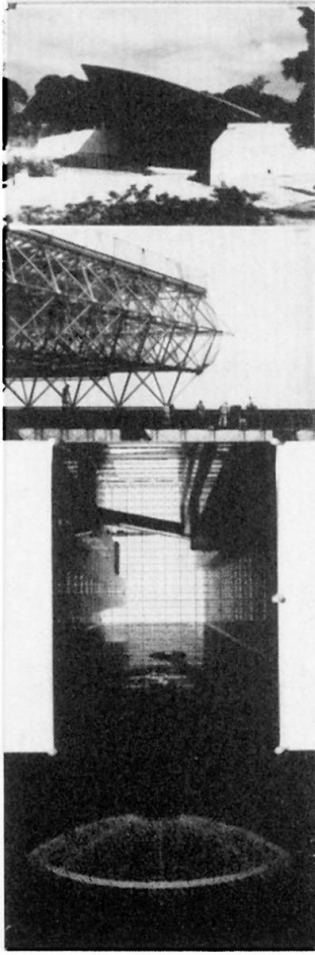

This system has following features;

- 1) easy application to wide-span structures
- 2) easy assembly on site
- 3) easy application to any structural shape
- 4) high structural reliability

Spherical surfaces of nodes, bolts and washers enable members to be connected without eccentricity of internal forces.

Bearing capacity of components and frames had been experimentally studied before design criteria were fixed.

Application of this system to a 200m-diameter dome is now under study.

