

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 13 (1988)

**Artikel:** Foundation developments for arctic and poor soils conditions

**Autor:** Duncan, Rob L.

**DOI:** <https://doi.org/10.5169/seals-13151>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 09.08.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Foundation Developments for Arctic and Poor Soils Conditions

Nouveau type de fondations pour des conditions de sol difficiles


Neuartige Foundationen für arktische und wenig tragfähige Böden

### Rob L. DUNCAN

Project Manager  
Canada Mortgage and Housing Corp.  
Ottawa, Canada


It is expensive to repair or replace residential buildings in remote Arctic locations damaged by differential foundation movement and frame racking. This paper highlights a Canadian Arctic residential foundation research program directed toward the development of practical and cost effective structural systems that will eliminate this problem. A tubular metal space frame chassis and plywood monocoque superstructure on three point or multiple point bearing conditions are two systems that are presently undergoing both theoretical computer modelling as well as field demonstration and testing.

Various combinations of geotechnical and structural foundation systems are traditionally used in Arctic residential construction including piles, surface pads/wedges and buried pad and pier. The performance of these systems are dependent on the construction process, geology, and level of maintenance. A purely structural solution reduces the number and complexity of the variables and increases the probability of providing long term stable support for the residential structure. A three dimensional metal space frame under the house or a stress skin shell structure incorporated into the wood frame superstructure are the two structural systems being developed. Either structural system could be simply supported on three determinant bearing points which has the advantage of eliminating torsional racking forces but increasing bending and bearing stresses.

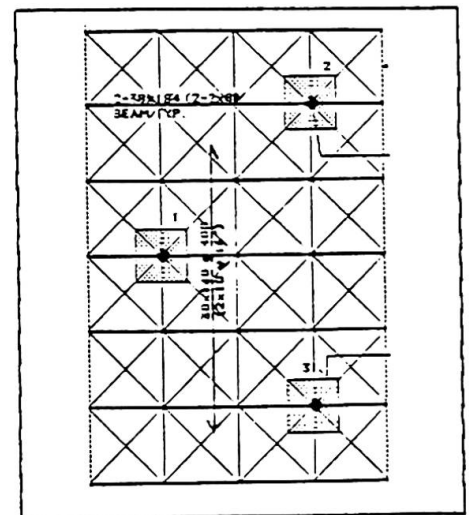

THREE POINT SPACE  
FRAME MODULE PLAN

A space frame on three bearing points was designed and manufactured by Triodetic Building Products Ltd. and constructed under a house in Rankin Inlet, NWT in 1985, whose steel pile foundations had failed. Maximum deflections were calculated to be 44 mm but measured to be 7 mm with no damage to the plaster board finishes. Double tubing was required at each of the three bearing points to reduce the stresses caused by the focus of loads. Other disadvantages of the three bearing point concept are that the structural system limits the floor plan and specialized engineering design and construction are required.

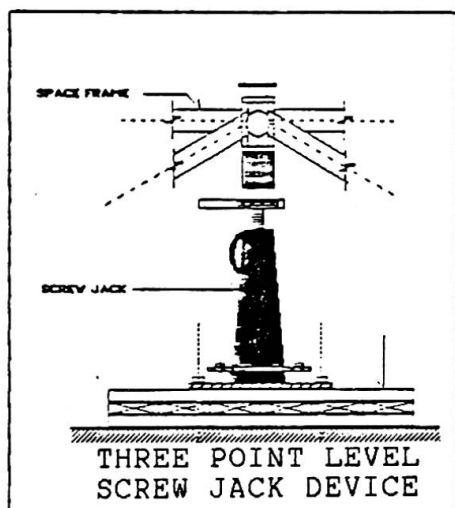

A modular multiple bearing point concept would overcome the three point limitations but would also introduce torsional racking forces. Both the space-frame and monocoque systems can be designed to resist torsional racking forces caused by differential ground displacement however, to reduce the structural framing requirements, it is advantageous to dampen footing displacements. Proto-type development and testing of dampening devices such as metal springs, air bags, and foam gasket materials are underway. The top of the soil layer may provide a dampening effect and reduce over-stressing forces by slightly undersizing the footing plates so that any overloaded footing will fail the soil on a local basis and redistribute the load. A frame was installed in Hay River, NWT, in 1987 that is designed according to this philosophy.

A multiple bearing point and rack resistant monocoque structure is in the design stage and will be constructed and lab tested in Vancouver, B.C. in 1988. This full scale testing under controlled loading and displacement conditions will produce optimum designs for production purposes. Although these foundation systems are being developed in Arctic soils conditions such as discontinuous permafrost, the concepts could find application in conditions where soils are generally unstable such as expanding clays and unstable silts.

"A" FRAME MEMBERS  
BRACE THE  
"MONOCOQUE" TUBE  
AND CARRY LOAD TO  
FOOTINGS

PLYWOOD ROOF,  
WALL, & FLOOR  
SHEATHING CREATES  
THE "MONOCOQUE"

8 BEARING POINTS  
ARE TO BE PLACED  
ON SPRINGS TO  
DAMPEN THE  
TORSIONAL STRESS  
INDUCED BY GROUND  
MOVEMENTS

PLYWOOD SIDE WALL  
ACTS LIKE DEEP  
BEAM TO SUPPORT  
FLOOR TRUSSES AND  
TRANSFER SHEAR  
BETWEEN "A" FRAME

MONOCOQUE CONCEPT

Leere Seite  
Blank page  
Page vide