

**Zeitschrift:** IABSE publications = Mémoires AIPC = IVBH Abhandlungen  
**Band:** 26 (1966)

**Artikel:** Gridworks of skew bridges  
**Autor:** Langendonck, Telemaco van  
**DOI:** <https://doi.org/10.5169/seals-20875>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 28.03.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

# Gridworks of Skew Bridges

*Les réseaux de poutres croisées des ponts biais*

*Schiefwinklige Trägerroste*

TELEMACO VAN LANGENDONCK

Prof. Dr. Eng., Universidade de São Paulo, Brasil

## 1. Introduction

In this paper the gridworks of skew bridges consisting of two simply supported, equal longitudinal girders connected by  $m - 1$  equal and equidistant transverse cross beams are studied. To simplify the solution of the problem, that otherwise would present  $3m - 3$  statically indeterminate unknowns, trigonometric polynomials are used, giving the exact solution<sup>1)</sup> of the question for loads applied on the intersections of the cross beams with the girders<sup>2)</sup>. In this manner, it is not necessary to solve systems with a great number of simultaneous equations. The method here expounded can be extended to the case of bridges with a greater number of longitudinal girders. However, the reinforced concrete bridges with only two girders are the most economical among the bridges with more frequent breadth. And it is just for bridges with two girders that it is essential to consider the effects of torsion on the girders and cross beams in order to take into account the solidarity of the system as a whole. The hypothesis of simply supported cross beams would not permit in that case the consideration of any contribution of one of the girders in the resistance of loads applied on the other (this would not be the case if the grid had more than two longitudinal girders).

---

<sup>1)</sup> The solution with use of trigonometric polynomials is not an approximation of the solution with use of Fourier's series [1] [2]; on the contrary, it gives the exact solution when the forces and moments considered act on equidistant positions of the longitudinal girders.

<sup>2)</sup> The process here studied may be generalized for application to the case of loads acting on any position of the cross beam or on its overhanging extensions.

### 2. Trigonometric Polynomials

The first author who used trigonometric polynomials in the study of grids was Ferraz [3] in 1951. He amply developed its applications to grids in general ignoring the effect of torsion and, taking in consideration this effect, to orthogonal grids.

As it is known, a function  $P$  that assumes the values  $P_n = 0, P_1, \dots, P_{m-1}, P_m = 0$  for the values  $n = 0, n = 1, \dots, n = m - 1, n = m$ , of the variable  $n$ , can be represented by the trigonometric polynomial:

$$P_n = \sum_{k=1}^{m-1} p_k \sin \frac{k \pi n}{m}, \tag{2.1}$$

where  $p_k$  are the coefficients obtained with:

$$p_k = \sum_{n=1}^{m-1} P_n \sin \frac{k \pi n}{m}. \tag{2.2}$$

This polynomial can therefore represent the loads  $P$  applied externally at the various intersections of the girders with the cross beams, when the notation of Fig. 1 is used. To distinguish the loads on the girder  $A$  of those acting on the girder  $B$  the corresponding index ( $P_{mA}, P_{mB}, p_{kA}, p_{kB}$ ) will be used. Quantities represented by polynomials of the cosine function like (2.5) will also be used in the solution of the problem.

It is also known that when a girder of span  $l = mc$ , simply supported at

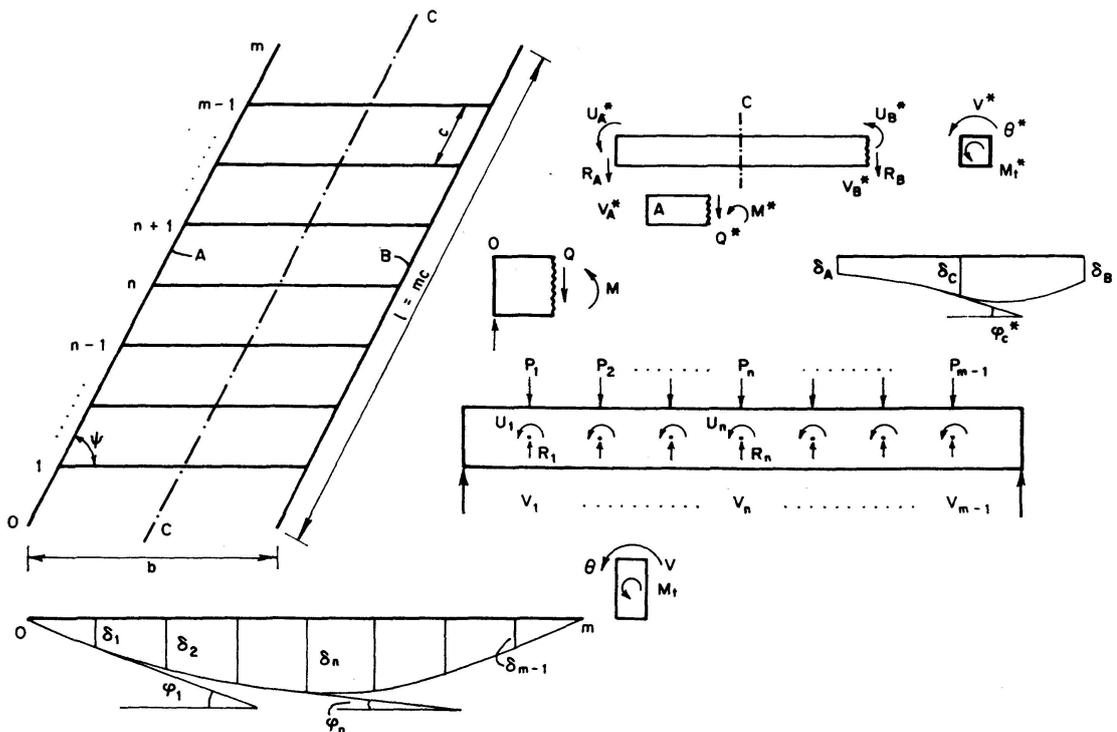


Fig. 1.

the points corresponding to  $n=0$  and  $n=m$  deforms under the action of the loads  $P_n$ , defined by (2.1) and acting downwards, it presents at the points of application of the loads the angular displacements  $\varphi_n$  and the vertical displacements  $\delta_n$  given by (the positive directions of these displacements are shown in fig. 1;  $EJ$  is the flexural rigidity of the girder<sup>3</sup>):

$$\varphi_n = \frac{c^2}{2 EJ} \sum p_k \beta_k \cos \frac{k \pi n}{m}, \quad \delta_n = \frac{c^3}{6 EJ} \sum p_k \alpha_k \sin \frac{k \pi n}{m} \quad (2.3)$$

with 
$$\alpha_k = \frac{2 + \cos k \pi/m}{2 (1 - \cos k \pi/m)^2}, \quad \beta_k = \frac{\sin k \pi/m}{2 (1 - \cos k \pi/m)^2}. \quad (2.4)$$

If the simply supported girder is bent by moments  $U_n$  (with  $U_0=0$  and  $U_m=0$ )<sup>4</sup>) determined by

$$U_n = C_u + \sum u_k \cos \frac{k \pi n}{m} \quad (2.5)$$

and situated in the plane of the girder, as in Fig. 1, the displacements will be given by:

$$\varphi_n = \frac{c}{EJ} \left( C_\varphi - \sum u_k \gamma_k \cos \frac{k \pi n}{m} \right), \quad \delta_n = \frac{-c^2}{2 EJ} \sum u_k \beta_k \sin \frac{k \pi n}{m}, \quad (2.6)$$

where  $\beta_k$  is the same of (2.4) and

$$C_\varphi = -\frac{1}{12} C_u = \frac{1}{12} \sum_e u_k, \quad \gamma_k = \frac{0,5}{1 - \cos k \pi/m}. \quad (2.7)$$

If  $U_n$  were determined by

$$U_n = \sum u_n \sin \frac{k \pi n}{m} \quad (2.8)$$

the angular displacements would be<sup>5</sup>)

<sup>3</sup>) From now on, for a greater simplicity, the following notations will be used:

$$\sum = \sum_{k=1}^m, \quad \sum_0 = \sum_{k=1,3,\dots}^m, \quad \sum_e = \sum_{k=2,4,\dots}^m.$$

The notation  $\sum_{0m}$  is equivalent to  $\sum_0$  if  $m$  is even and  $\sum_e$  to  $\sum_e$  if  $m$  is odd; on the contrary:

$$\sum_{0m} f(k) = \sum_0 f(k) - 0,5 f(m), \quad \sum_{em} f(k) = \sum_e f(k) - 0,5 f(m).$$

<sup>4</sup>) What leads to:

$$\sum_0 u_k = 0, \quad \sum_e u_k = -C_u.$$

<sup>5</sup>)  $\lambda_k$  is a function of  $k$  such that the sum  $\sum u_k \lambda_k \sin (k \pi n/m)$  represents a function of the 2d degree of  $n$ . For the use in the formulae of § 4, it is possible to take the approximate value, for  $k$  odd:

$$\lambda_k \cong (m-1) \left( \frac{1}{12} + \frac{\gamma_k}{m} \right)$$

and  $\lambda_k \cong 0$ , for  $k$  even.

$$\varphi_n = \frac{c}{EJ} \sum u_k (\lambda_k - \gamma_k) \sin \frac{k \pi n}{m}. \quad (2.9)$$

When the girder is loaded by a system of couples  $V_n$  in equilibrium<sup>6)</sup>, acting in planes normal to its axis and determined by

$$V_n = C_v + \sum v_k \cos \frac{k \pi n}{m} \quad (2.10)$$

there are angular displacements of the various cross sections of the girder given by ( $\gamma_k$  is given by (2.7) and  $GJ_t$  is the torsional rigidity of the girder)<sup>7)</sup>:

$$\theta_n = \frac{c}{GJ_t} \left[ C_\theta + \sum (v_k - K_k) \gamma_k \cos \frac{k \pi n}{m} \right]. \quad (2.11)$$

The constants  $C_\theta$  and  $K_k$  ( $K_a$  and  $K_b$ ) depend on the conditions of the supports. When the transversal rotations of the ends of the girder are prevented ( $\theta_0 = \theta_m = 0$ ) their values are:

$$K_a = \frac{8}{m^2} \sum_0 v_k \gamma_k, \quad K_b = 2C_v = \frac{-2}{m+1} \sum_e v_k, \quad C_\theta = \frac{m^2-1}{24} K_b - \sum_e v_k \gamma_k. \quad (2.12)$$

If  $V_n$  is given by

$$V_n = \sum v_k \sin \frac{k \pi n}{m} \quad (2.13)$$

the more simple expression

$$\theta_n = \frac{c}{CJ_t} \sum v_k \gamma_k \sin \frac{k \pi n}{m} \quad (2.14)$$

is obtained for the same girder.

The values of the coefficients  $\alpha_k$ ,  $\beta_k$  and  $\gamma_k$  are given in Tables I, II and III.

### 3. Internal Forces and Moments

The cross beams are subjected at their ends (Fig. 1) to vertical forces  $R_A$  and  $R_B$ , to moments  $U_A^*$  and  $U_B^*$  acting in the vertical plane that contains its axis and torques  $V_A^*$  and  $V_B^*$ . By a simple consideration of equilibrium the

<sup>6)</sup> That is, which sum is null, what leads to:

$$\sum_e v_k = -(m+1)C_v.$$

<sup>7)</sup> On what follows  $K_k$  and  $C_k$  are constants meaning respectively  $K_b$  and  $C_b$  for  $k$  even and different from  $m$ ,  $K_a$  and  $C_a$  for  $k$  odd and different from  $m$ ,  $0,5 K_b$  and  $0,5 C_b$  for  $k=m$  even, and  $0,5 K_a$  and  $0,5 C_a$  for  $k=m$  odd. These conditions lead to:

$$\frac{1}{K_b} \sum_e K_k = \frac{1}{K_a} \sum_0 K_k = \frac{1}{C_b} \sum_e C_k = \frac{1}{C_a} \sum_0 C_k = \frac{m}{2},$$

$$\frac{1}{K_b} \sum_e \gamma_k K_k = \frac{1}{C_b} \sum_e \gamma_k C_k = \frac{m^2-1}{24}, \quad \frac{1}{K_a} \sum_0 \gamma_k K_k = \frac{1}{C_a} \sum_0 \gamma_k C_k = \frac{m^2}{8}.$$

Table I. Values of  $\alpha_k$

$m$	$k =$															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
2	1,000	0,125														
3	5,000	0,333	0,125													
4	15,778	1,000	0,222	0,125												
5	38,507	2,418	0,493	0,182	0,125											
6	79,837	5,000	1,000	0,333	0,163	0,125										
7	147,90	9,253	1,838	0,595	0,261	0,152	0,125									
8	252,31	15,778	3,126	1,000	0,423	0,222	0,145	0,125								
9	404,14	25,267	5,000	1,592	0,663	0,333	0,198	0,141	0,125							
10	615,98	38,507	7,615	2,418	1,000	0,493	0,280	0,182	0,138	0,125						
11	901,84	56,373	11,144	3,534	1,456	0,712	0,395	0,246	0,171	0,135	0,125					
12	1277,3	79,837	15,778	5,000	2,056	1,000	0,549	0,333	0,222	0,163	0,134	0,125				
13	1759,3	109,96	21,728	6,882	2,826	1,371	0,748	0,448	0,291	0,205	0,157	0,132	0,125			
14	2366,3	147,90	29,222	9,253	3,797	1,838	1,000	0,595	0,381	0,261	0,192	0,152	0,131	0,125		
15	3118,4	194,90	38,507	12,191	5,000	2,418	1,312	0,777	0,493	0,333	0,239	0,182	0,148	0,131	0,125	
16	4036,6	252,31	49,846	15,778	6,469	3,126	1,694	1,000	0,632	0,423	0,298	0,222	0,174	0,145	0,130	0,125

Table II. Values of  $\beta_k$ 

$m$	$k =$															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
2	0,500	0														
3	1,732	0,192	0													
4	4,121	0,500	0,121	0												
5	8,057	0,996	0,278	0,0898	0											
6	13,928	1,732	0,500	0,192	0,0718	0										
7	22,121	2,758	0,806	0,326	0,148	0,0600	0									
8	33,023	4,121	1,212	0,500	0,242	0,121	0,0517	0								
9	47,020	5,872	1,732	0,721	0,357	0,192	0,103	0,0455	0							
10	64,502	8,057	2,381	0,996	0,500	0,278	0,160	0,0898	0,0406	0						
11	85,851	10,727	3,172	1,331	0,673	0,379	0,227	0,138	0,0797	0,0367	0					
12	111,46	13,928	4,121	1,732	0,879	0,500	0,305	0,192	0,121	0,0718	0,0335	0				
13	141,71	17,710	5,242	2,206	1,122	0,642	0,395	0,255	0,167	0,108	0,0654	0,0308	0			
14	177,00	22,121	6,550	2,758	1,406	0,806	0,500	0,326	0,219	0,148	0,0982	0,0600	0,0285	0		
15	217,70	27,208	8,057	3,394	1,732	0,996	0,620	0,408	0,278	0,192	0,133	0,0898	0,0555	0,0266	0	
16	264,19	33,023	9,780	4,121	2,105	1,212	0,757	0,500	0,343	0,242	0,172	0,121	0,0828	0,0517	0,0249	0

Table III. Values of  $\gamma_k$

$m$	$k =$															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
2	0,500	0,250														
3	1,000	0,333	0,250													
4	1,707	0,500	0,293	0,250												
5	2,618	0,724	0,382	0,276	0,250											
6	3,732	1,000	0,500	0,333	0,268	0,250										
7	5,049	1,328	0,643	0,409	0,308	0,263	0,250									
8	6,569	1,707	0,810	0,500	0,362	0,293	0,260	0,250								
9	8,291	2,137	1,000	0,605	0,426	0,333	0,283	0,258	0,250							
10	10,216	2,618	1,213	0,724	0,500	0,382	0,315	0,276	0,256	0,250						
11	12,344	3,150	1,449	0,855	0,583	0,438	0,353	0,302	0,272	0,255	0,250					
12	14,674	3,732	1,707	1,000	0,675	0,500	0,397	0,333	0,293	0,268	0,254	0,250				
13	17,207	4,365	1,988	1,158	0,775	0,569	0,446	0,369	0,319	0,286	0,265	0,254	0,250			
14	19,943	5,049	2,292	1,328	0,883	0,643	0,500	0,409	0,349	0,308	0,281	0,263	0,253	0,250		
15	22,881	5,783	2,618	1,511	1,000	0,724	0,558	0,453	0,382	0,333	0,300	0,276	0,261	0,253	0,250	
16	26,021	6,569	2,967	1,707	1,125	0,810	0,621	0,500	0,418	0,362	0,321	0,293	0,273	0,260	0,252	0,250

following relations are obtained:

$$R_B = -R_A, \quad U_B^* = -U_A^* - b R_A, \quad V_B^* = -V_A^*. \quad (3.1)$$

The same forces  $R_A$  and  $R_B$  act on the girders  $A$  and  $B$  and the moments  $U^*$  and  $V^*$  are related to the moments  $U$  and  $V$  that act on the girders in the section of contact by the equalities (also valid when  $A$  is replaced by  $B$ ):

$$U_A^* = V_A \sin \psi - U_A \cos \psi, \quad V_A^* = -U_A \sin \psi - V_A \cos \psi. \quad (3.2)$$

On the cross section of the middle of the transverse beam act a shear force  $Q_c^*$ , a bending moment  $M_c^*$  and a twisting moment  $M_{tc}^*$  (Fig. 2):

$$Q_c^* = -R_A, \quad M_c^* = -U_A^* - \frac{1}{2} b R_A, \quad M_{tc}^* = -V_A^*. \quad (3.3)$$

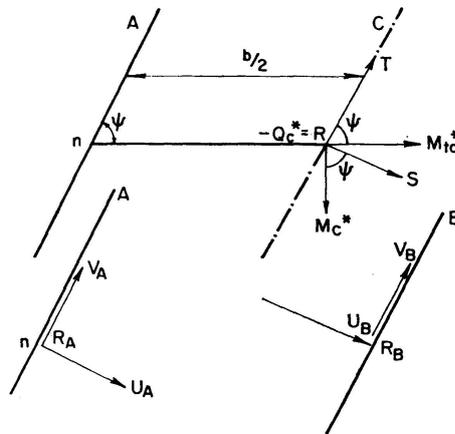


Fig. 2.

The following internal forces and moments (Fig. 2) act on the section of the middle of the cross beam parallel to the girders (they will be taken as unknowns of the statically indeterminate problem):

$$R = R_A, \quad S = U_A - R \frac{b}{2} \cos \psi, \quad T = V_A + R \frac{b}{2} \sin \psi. \quad (3.4)$$

There will be one of each kind of these unknowns for each cross beam, that is, for each  $n$ ; so they can be represented by trigonometric polynomials:

$$R_n = \sum r_k \sin \frac{k \pi n}{m}, \quad S_n = C_s + \sum s_k \cos \frac{k \pi n}{m}, \quad T_n = C_t + \sum t_k \cos \frac{k \pi n}{m}. \quad (3.5)$$

If  $R$ ,  $S$  and  $T$  are determined, all the stress resultants on the longitudinal girders will be known

$$R_{nA} = R_n, \quad U_{nA} = S_n + R_n \frac{b}{2} \cos \psi, \quad V_{nA} = T_n - R_n \frac{b}{2} \sin \psi, \quad (3.6)$$

$$R_{nB} = -R_n, \quad U_{nB} = U_{nA} - 2 S_n, \quad V_{nB} = V_{nA} - 2 T_n \quad (3.7)$$

and consequently through (3.2) and (3.3) those of the cross beams.

Using (3.6) and (3.7) and comparing (3.5) with the developments of  $U_A$  and  $U_B$  (2.5),  $V_A$  and  $V_B$  (2.10),  $R_A$  and  $R_B$  (3.5), the following relations are obtained:

$$r_{kB} = -r_{kA} = -r_k, \quad u_{kB} = u_{kA} - 2s_k, \quad v_{kB} = v_{kA} - 2t_k. \quad (3.8)$$

The relations:

$$U_{nA} + U_{nB} = R_n b \cos \psi, \quad V_{nA} + V_{nB} = -R_n b \sin \psi \quad (3.9)$$

are also valid.

#### 4. Determination of the Unknowns

The compatibility of the displacements is used to find the unknowns. The differences of the linear and angular displacements between the two extremities of each cross beam are (Fig. 1 and formulae (3.2) and (3.4)):

$$\theta_B^* - \theta_A^* = -V_A^* \frac{b}{GJ_t^*} = (U_A \sin \psi + V_A \cos \psi) \frac{b}{GJ_t^*} = (S \sin \psi + T \cos \psi) \frac{b}{GJ_t^*}, \quad (4.1)$$

$$\varphi_B^* - \varphi_A^* = R_A \frac{b^2}{2EJ^*} + U_A^* \frac{b}{EJ^*} = (T \sin \psi - S \cos \psi) \frac{b}{EJ^*}, \quad (4.2)$$

$$\delta_B - \delta_A = \varphi_A^* b + R_A \frac{b^3}{6EJ^*} + U_A^* \frac{b^2}{2EJ^*} = (\varphi_B^* + \varphi_A^*) \frac{b}{2} - R \frac{b^3}{12EJ^*}, \quad (4.3)$$

where  $b$  is the length of the cross beam,  $EJ^*$  its flexural rigidity and  $GJ_t^*$  its torsional rigidity.

The vertical displacements of the girders  $A$  and  $B$  at the intersections with the cross beams are equal to those of these beams ( $\delta_A$  and  $\delta_B$ ); the angular displacements are (these formulae are also valid when  $A$  is replaced by  $B$ ):

$$\varphi_A = \varphi_A^* \cos \psi - \theta_A^* \sin \psi, \quad \theta_A = \varphi_A^* \sin \psi + \theta_A^* \cos \psi \quad (4.4)$$

expressions that compared with (4.1) and (4.2) lead to<sup>8)</sup>:

$$\theta_B - \theta_A = \frac{c}{GJ_t} \left( \omega_1 S + \omega_3 T + 0,5 C'_b + \sum C'_k \cos \frac{k \pi n}{m} \right), \quad (4.5)$$

$$\varphi_B - \varphi_A = \frac{c}{EJ} \left( -\omega_4 S - \omega_2 T + 0,5 C_b + \sum C_k \cos \frac{k \pi n}{m} \right), \quad (4.6)$$

where the  $\omega$  are the following constants that only depend of the dimensions of the structure

<sup>8)</sup> The terms added in (4.5) and (4.6)

$$0,5 C_b + \sum C_k \cos \frac{k \pi n}{m}$$

correspond to values of  $\theta_B - \theta_A$  and  $\varphi_B - \varphi_A$  null in all the intersections of the longitudinal girders with the cross beams, but not in the free extremities of the girder; they are added because the verification of the equalities (4.5) and (4.6) in those extremities is not necessary.

$$\begin{aligned}\omega_1 &= \left( \frac{G J_t}{G J_t^*} - \frac{G J_t}{E J^*} \right) \frac{b}{c} \sin \psi \cos \psi, & \omega_2 &= \frac{E J}{G J_t} \omega_1, \\ \omega_3 &= \left( \frac{G J_t}{G J_t^*} \cos^2 \psi + \frac{G J_t}{E J^*} \sin^2 \psi \right) \frac{b}{c}, & \omega_4 &= \left( \frac{E J}{E J^*} \cos^2 \psi + \frac{E J}{G J_t^*} \sin^2 \psi \right) \frac{b}{c}.\end{aligned}\quad (4.7)$$

From (2.11) and (3.8) the expression

$$\theta_B - \theta_A = K_\theta - \frac{c}{G J_t} \sum (2 t_k + K_k) \gamma_k \cos \frac{k \pi n}{m} \quad (4.8)$$

is obtained; this one, compared with (4.5) and (3.5) gives

$$\omega_1 s_k + (\omega_3 + 2 \gamma_k) t_k = -\gamma_k K_k - C'_k = -K'_k \quad (4.9)$$

whence

$$s_k = \eta'_k t_k - \frac{1}{\omega_1} K'_k \quad (4.10)$$

with

$$\eta'_k = -\frac{\omega_3 + 2 \gamma_k}{\omega_1}, \quad (4.11)$$

Similarly, using (2.3) to (2.7) and (3.8), the expression

$$\varphi_B - \varphi_A = K_\varphi + \frac{c}{E J} \sum (c r_k \beta_k - 0,5 c p_k \beta_k + 2 s_k \gamma_k) \cos \frac{k \pi n}{m} \quad (4.12)$$

is obtained; this one, compared with (4.6) and (3.5) gives

$$(\omega_4 + 2 \gamma_k) s_k + \omega_2 t_k + c \beta_k r_k = 0,5 c \beta_k p_k + C_k \quad (4.13)$$

whence, using 4.10 ( $k \neq m$ ):

$$r_k = \frac{p_k}{2} + \frac{C_k}{c \beta_k} - \eta_k t_k + \bar{\eta}_k K'_k \quad (4.14)$$

with

$$\eta_k = \frac{\omega_2 + (\omega_4 + 2 \gamma_k) \eta'_k}{c \beta_k}, \quad \bar{\eta}_k = \frac{\omega_4 + 2 \gamma_k}{c \beta_k \omega_1}. \quad (4.15)$$

Finally from (2.3) to (2.7) and (3.8) it is also obtained:

$$\delta_B - \delta_A = \frac{c^2}{6 E J} \sum (2 c r_k \alpha_k - c p_k \alpha_k + 6 s_k \beta_k) \sin \frac{k \pi n}{m}. \quad (4.16)$$

Also, knowing that

$$\varphi_A^* + \varphi_B^* = (\varphi_A + \varphi_B) \cos \psi + (\theta_A + \theta_B) \sin \psi \quad (4.17)$$

and using (3.9), (2.9) and (2.14), it is verified that (4.3) can be written

$$\delta_B - \delta_A = \frac{-c^3}{6 E J} \sum (3 \omega_5 \gamma_k + \omega_6 - \omega_7 \lambda_k) r_k \sin \frac{k \pi n}{m}, \quad (4.18)$$

where

$$\omega_5 = \left( \cos^2 \psi + \frac{E J}{G J_t} \sin^2 \psi \right) \frac{b^2}{c^2}, \quad \omega_6 = \frac{b^3}{2 c^3} \frac{E J}{E J^*}, \quad \omega_7 = \frac{3 b^2}{c^2} \cos^2 \psi. \quad (4.19)$$

Putting  $\eta_k'' = 3\omega_5\gamma_k + \omega_6 - \omega_7\lambda_k + 2\alpha_k$  (4.20)

and comparing (4.16) and (4.18), ( $k \neq m$ ):

$$c\eta_k''r_k + 6\beta_k s_k = c\alpha_k p_k \tag{4.21}$$

is obtained, whence, with (4.10) and (4.14):

$$t_k = \frac{c p_k (\alpha_k - 0,5 \eta_k'') - (\eta_k''/\beta_k) C_k + (6\beta_k/\omega_1 - c \bar{\eta}_k \eta_k'') K'_k}{6\beta_k \eta_k' - c \eta_k \eta_k''} \tag{4.22}$$

$$= c \eta_k^* p_k + \eta_k^{**} C_k + \bar{\eta}_k^* K'_k.$$

For  $k = m$ , (4.13) is used (remark that  $\beta_m = 0$  and  $\gamma_m = 0,25$ ):

$$s_m = \frac{C_m - \omega_2 t_m}{\omega_4 + 0,5} \tag{4.23}$$

that compared with (4.10) permits to write

$$t_m = \frac{C_m - (\omega_4 + 0,5) K'_m/\omega_1}{\omega_2 + (\omega_4 + 0,5) \eta_m'} \tag{4.24}$$

or, with the notation of the last member of (4.22):

$$\eta_m^* = 0, \quad \eta_m^{**} = \frac{1}{\omega_2 + (\omega_4 + 0,5) \eta_m'}, \quad \bar{\eta}_m^* = \frac{\omega_4 + 0,5}{\omega_1} \eta_m^{**}. \tag{4.25}$$

The constants  $K_a, K_b, C_a, C_b, C_s$  and  $C_t$  are determined in view of the conditions at the extremities:  $S_0 = S_m = 0$  (from 3.6 and 3.7 with  $U_0 = U_m = 0$  and  $R_0 = R_m = 0$ ) and those defined by (2.7) and (2.12)<sub>j</sub> that are<sup>9)</sup>

$$\sum_0 s_k = 0, \quad \sum_e s_k = -C_s, \quad C_b - 2\omega_2 C_t = C_s(2\omega_4 + 1/3), \tag{4.26}$$

$$\sum_0 t_k \gamma_k = -\frac{m^2}{16} K_a, \quad \sum_e t_k = \frac{m+1}{4} K_b, \quad C_t = -\frac{1}{4} K_b, \tag{4.27}$$

$$\omega_1 C_s + \omega_3 C_t + 0,5 C'_b = \frac{m^2 - 1}{4} K_b + 2 \sum_e \gamma_k t_k.$$

From the first equalities (4.26) and (4.27), using (4.10) and (4.22) and putting  $C'_a = 0$ , the equations

$$C_a \sum_{0m} \eta_k' \eta_k^{**} + K_a \left( \sum_{0m} \eta_k' \bar{\eta}_k^* - \frac{m^2}{8\omega_1} \right) = -c \sum_0 \eta_k' \eta_k^* p_k, \tag{4.28}$$

$$C_a \sum_{0m} \gamma_k \eta_k^{**} + K_a \left( \sum_{0m} \gamma_k \bar{\eta}_k^* + \frac{m^2}{16} \right) = -c \sum_0 \gamma_k \eta_k^* p_k$$

are obtained, from which  $C_a$  and  $K_a = K'_k/\gamma_k$  are determined.

<sup>9)</sup> The 3d condition proceeds from (2.7) combined with (3.8) and (4.6):

$$C_{\varphi B} - C_{\varphi A} = \frac{1}{12} \sum_e (u_{kB} - u_{kA}) = -\frac{1}{6} \sum_e s_k = -\omega_4 C_s - \omega_2 C_t + 0,5 C_b.$$

The equations that determine  $C_b$ ,  $C'_b$  and  $K_b$  are:

$$C_b \sum_{em} \eta_k^{**} + C'_b \sum_{em} \bar{\eta}_k^* + K_b \left( \sum_{em} \gamma_k \bar{\eta}_k^* - \frac{m+1}{4} \right) = -c \sum_e \eta_k^* p_k, \quad (4.29)$$

$$C_b \left( \sum_{em} \eta'_k \eta_k^{**} + \omega_8 \right) + C'_b \left( \sum_{em} \eta'_k \bar{\eta}_k^* - \frac{m}{2\omega_1} \right) + K_b \left( \sum_{em} \gamma_k \eta'_k \bar{\eta}_k^* + \frac{2\omega_9}{\omega_1} \right) = -c \sum_e \eta'_k \eta_k^* p_k,$$

$$C_b \left( \sum_{em} \gamma_k \eta_k^{**} - 0,5 \omega_1 \omega_8 \right) + C'_b \left( \sum_{em} \gamma_k \bar{\eta}_k^* - 0,25 \right) + K_b \left( \sum_{em} \gamma_k^2 \bar{\eta}_k^* - \omega_9 - \frac{\omega_3}{8} \right) \\ = -c \sum_e \gamma_k \eta_k^* p_k,$$

where 
$$\omega_8 = \frac{3}{6\omega_4 + 1}, \quad \omega_9 = \frac{1}{48} (12\omega_1\omega_2\omega_8 + 1 - m^2). \quad (4.30)$$

Finally,  $C_s$  and  $C_t$  are obtained from:

$$C_s = -\sum_e s_k, \quad C_t = -0,25 K_b. \quad (4.31)$$

So, all the necessary elements to solve the problem are known. The solution can be obtained with the following sequence:

- a) Determine the quantities  $\omega$  that only depend of  $E/G$  and of the dimension of the structure.
- b) Determine the constants  $\eta$  that depend of the  $\omega$  and of the coefficients of the Tables I, II, III.
- c) Calculate the following constants, that depend of the load ( $p_k$ ):  $K_a$  and  $C_a$  (from 4.28),  $K_b$ ,  $C_b$  and  $C'_b$  (from 4.29).
- d) Calculate  $t_k$  (4.22),  $s_k$  (4.10),  $r_k$  (4.14),  $C_s$  and  $C_t$  (4.31) and, after,  $R_n$ ,  $S_n$  and  $T_n$  (3.5).
- e) Using (3.6) and (3.7), all the forces and moments ( $R$ ,  $U$  and  $V$ ) that act on the longitudinal girder will be known and, through (3.1), (3.2) and (3.3), the forces and moments that act on the cross beams.

## 5. Example

Consider a gridwork with girders long  $l=24$  meters, divided in  $m=6$  parts  $c=4$  meters long, by five cross beams  $b=6$  meters long; it is known that  $\tan \psi = 2$ ,  $J = J^* = 1,6$ ,  $J_t = 1,6 J_t^*$  and  $E/G = 2,5$ . It is asked the effect of one load  $P = 1000$  kg applied in the intersection of the girder  $A$  with the cross beam  $n = 2$ .

With the previous formulae, the coefficients  $\omega$ , which depend only of the dimensions of the grid, are calculated:

$$\begin{aligned} \omega_1 &= 0,45, & \omega_2 &= 1,8, & \omega_3 &= 0,6, & \omega_4 &= 5,1, & \omega_5 &= 7,65, \\ \omega_6 &= 1,6875, & \omega_7 &= 1,35, & \omega_8 &= 0,09494, & \omega_9 &= -0,70994. \end{aligned}$$

Then, the coefficients  $\eta$ , that depend also from the functions tabulated in the Tables I, II and III, are determined; the results are given in the Table IV. The three last lines of this Table, where are already given the unknowns  $t_k$ ,  $s_k$  and  $r_k$ , were obtained after the determination of the constants  $C_a$ ,  $K_a$ ,  $C_b$ ,  $C'_b$  and  $K_b$  with (4.28) and (4.29):

$$\begin{aligned} 0,51613 C_a + 0,29746 K_a &= -87,463 c, \\ -0,07440 C_a + 0,25716 K_a &= 18,420 c. \end{aligned} \tag{5.1}$$

$$\begin{aligned} -0,13926 C_b - 1,8154 C'_b - 2,5807 K_b &= 3,1054 c, \\ 0,55324 C_b - 0,5542 C'_b + 0,3307 K_b &= -23,2882 c, \\ -0,08872 C_b - 1,0807 C'_b + 0,0998 K_b &= 4,3082 c, \end{aligned} \tag{5.2}$$

Table IV

$k =$	1	2	3	4	5	6
$p_k$ (kg)	288,68	288,68	0	-288,68	-288,68	0
$\eta'_k$	-17,9202	-5,7778	-3,5556	-2,8148	-2,5242	-2,4444
$c \eta_k$	-16,036	-22,645	-39,778	-74,991	-173,07	-
$c \bar{\eta}_k$	2,0046	9,1093	27,111	66,588	174,43	-
$\eta''_k$	242,250	34,6375	14,0375	10,0042	7,2987	-
1000 $\eta_k^*$	-17,296	-17,007	-10,989	-6,250	-2,762	0
1000 $\eta_k^{**}$	-7,286	-27,609	-51,258	-69,592	-80,546	-84,112
$\bar{\eta}_k^*$	-0,12563	-0,40372	-0,68266	-0,88837	-1,00797	-1,04673
$\gamma_k \bar{\eta}_k^*$	-0,46886	-0,40372	-0,34133	-0,29612	-0,27009	-0,26168
$K'_k$	72,368	1,0355	9,6955	0,1358	5,1958	-0,1454
$\eta_k^* p_k$ (kg)	-4,9930	-4,9096	0	1,8042	0,7973	0
$t_k/c$ (kg)	-12,769	-4,134	2,640	4,691	10,109	1,970
$s_k/c$ (kg)	68,007	21,584	-30,932	-13,506	-37,063	-4,492
$r_k$ (kg)	71,676	35,208	6,609	-8,071	-4,308	-

Table V

$n =$	1	2	3	4	5
$T_n$ (kgm)	-106,3	-10,6	25,9	23,1	52,2
$S_n$ (kgm)	437,8	137,1	-136,7	-234,1	-290,2
$R_n = R_{nA} = -R_{nB}$ (kg)	63,8	103,3	60,8	28,3	16,8
$U_{nA}$ (kgm)	523,4	273,7	-55,1	-196,1	-267,7
$U_{nB}$ (kgm)	-352,2	-0,5	218,3	272,1	312,7
$V_{nA}$ (kgm)	-277,5	-266,6	-137,2	-52,8	-7,1
$V_{nB}$ (kgm)	-64,9	-245,4	-189,0	-99,0	-111,5

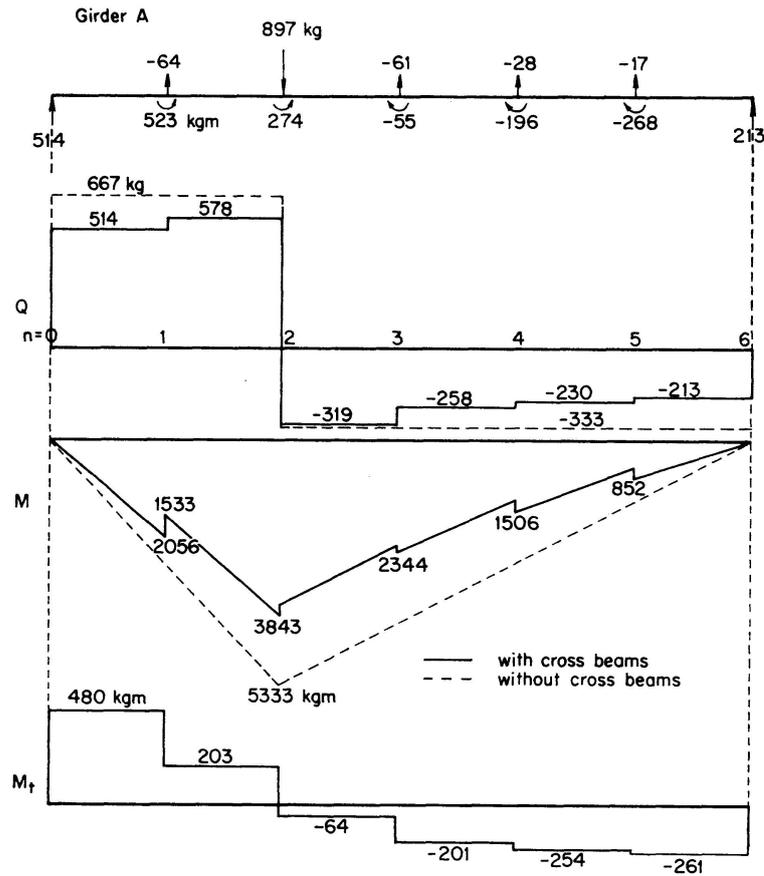


Fig. 3.

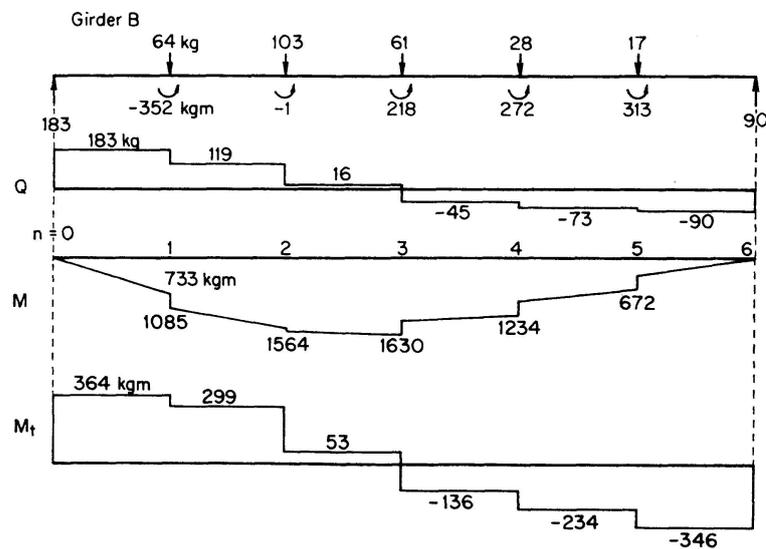


Fig. 4.

with the results:

$$\begin{aligned}
 C_a &= -180,63 c, & K_a &= 19,391 c, \\
 C_b &= -43,216 c, & C'_b &= -0,3141 c, & K_b &= 1,3496 c.
 \end{aligned}
 \tag{5.3}$$

From (4.31):

$$C_t = -0,3774c, \quad C_s = -3,586c. \quad (5.4)$$

The statically indeterminate unknowns  $R$ ,  $S$  and  $T$  and the forces and moments acting in the girders and in the cross beams are obtained with (3.5), (3.6), (3.7) and (3.2). The results are given in the Table V and in the diagrams of Figs. 3 and 4.

Observe that, for the determination of the effects of other applied loads it is not necessary to recalculate the coefficients  $\omega$  and  $\eta$ ; the same values already obtained can be used.

The time spented to solve this example, without electronic computers, was much more brief than the necessary one to solve it by the usual methods.

### References

1. W. KLEMP: Ein neues Verfahren der Trägerrostberechnung. Beton- und Stahlbetonbau, Jan. 1956.
2. M. HETÉNYI: A method of calculating grillage beams. Contribution to the Mechanics of Solids dedicated to S. Timoshenko, 1938.
3. J. C. F. FERRAZ: Contribuição ao estudo das grelhas. São Paulo, 1951.

### Summary

The gridworks of skew bridges consisting of two simply supported, equal longitudinal girders connected by  $m - 1$  equal and equidistant transverse cross beams are studied. To simplify the solution of the problem, that otherwise would present  $3m - 3$  statically indeterminate unknowns, trigonometric polynomials are used, giving the exact solution of the question for loads applied on the intersections of the cross beams with the girders. In this manner, it is not necessary to solve systems with a great number of simultaneous equations. All effects of torsion and bending of the longitudinal girders and also of the cross beams are considered.

### Résumé

On étudie les réseaux de poutres croisées de ponts biaux composés de deux longerons égaux simplement appuyés solidarisés par  $m - 1$  poutres transversales égales et équidistantes. Pour simplifier la résolution du problème, qui autrement aurait des inconnues hyperstatiques au nombre de  $3m - 3$ , on fait usage de polynômes trigonométriques qui permettent d'obtenir la solution exacte dans le cas de charges appliquées aux intersections des traverses et des longerons. Ce qui évite la résolution de systèmes comportant un grand nombre d'équations simultanées. On considère tous les effets de torsion et de flexion des longerons ainsi que des poutres transversales.

### Zusammenfassung

Der Verfasser untersucht schiefwinklige Trägerroste, bestehend aus zwei gleichen, einfach gelagerten Längsträgern, die durch  $m - 1$  gleiche und äquidistante Querträger miteinander verbunden sind. Um die Lösung des Problems zu vereinfachen, welches sonst  $3m - 3$  statische Unbekannte aufweisen würde, werden trigonometrische Polynome eingeführt, die für in den Schnittpunkten Querträger-Längsträger aufgebrauchte Lasten eine exakte Lösung des Problems ergeben. Auf diese Weise ist es nicht mehr notwendig, Gleichungssysteme mit einer großen Anzahl von Simultangleichungen aufzulösen. Alle Verdrehungs- und Biege-Einflüsse der Längsträger und der Querträger werden berücksichtigt.