

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 1 (1977)
Heft: C-2: Parking structures

Artikel: Multi-storey garages in Žilina and Bratislava (Czechoslovakia)
Autor: Kozák, J. / Poštulka, J.
DOI: <https://doi.org/10.5169/seals-14519>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 07.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



6. Multi-Storey Garages in Žilina and Bratislava (Czechoslovakia)

Owner: Corporation of garages owners

Architect: I. Ehrenberger, I. Vaško

Engineers: J. Poštulka, J. Kozák, J. Hodák

Contractor: Vítkovice Steelworks of K. Gottwald, national corporation, Ostrava 6

Dimensions and arrangement:

Total surface, including ramps: 17'000 m²

Floor surfaces, including ramps: 2'450 m²

Number of floors: 7

Total number of parking units: 585

Space built: 50'100 m³; 85 m³/parking unit

Column spacing: 5,40/7,20 x 7,50 m

Clear ceiling height: 2,10 m

Floor thickness: 40 cm (longitudinal girder)

Ramp's grade: 11,6 o/o; Ramp's width: 3,50 m

Parking arrangement: upright, on both sides; parking units are separated by sheet partitions

Lane's width: 7,20 m

Parking unit's dimensions: 2,50 x 5,40 m (brutto)

Live load (excluding permanent load): 3,5 kN/m²

Material used:

Concrete (for floor slabs): total 1'370 m³; 2,35 m³/parking unit

Steel for concrete: 90 kg/parking unit

Structural steel: inkl. sheet floor panel and partition: total 1'200 t; 23,6 kg/m³, and 2'220 kg/parking unit

Works duration: 15 months

Service date: Žilina 1970, Bratislava 1976

Description of the structures

In the transverse section both halves of the building differ from each by one half of the storey. The building's length is a multiple of the unit length 7,5 m, and the building's height a multiple of the storey height 2,50 m. The layout and the height of building could be also different. On the ground-floor, a service shop is usually placed, whereas parking units for individual cars are on upper floors. Each unit is closed by partition walls and doors. The access of the cars into garage-boxes is provided by ramps, one for the upstair and one for the downstair direction. The upper stories are not insulated.

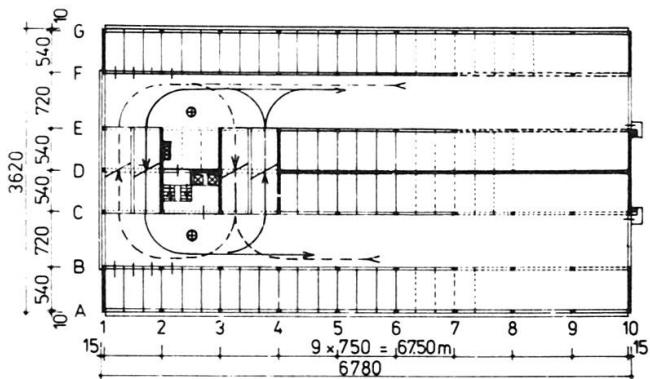


Fig. 1 Typical parking floor

The floor structures consist of rolled joists at a distance of 1,25 m or 2,50 m which support steel sheet panels with reinforced concrete layer. The longitudinal facade girders have been designed as welded double T sections, the upper flanges of which are used as a stop for the wheels of the cars. These girders carry a structure for solid glazing. The middle girders have a welded double T section, as the columns. The vertical wind-bracings are designed either as lattices or as frames.

Because the fire loading is only 0,1 kN/m², no fire protection of steel structures is provided.

(J. Kozák, J. Poštulka)

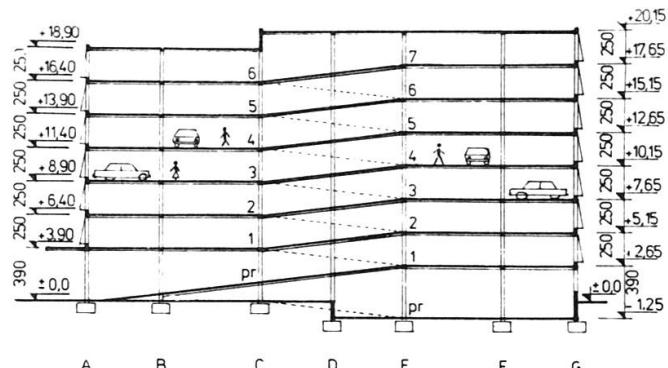


Fig. 2 Vertical section with the ramps

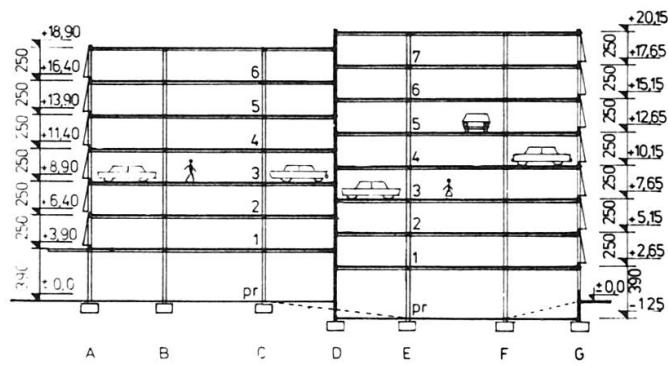


Fig. 3 Typical vertical section

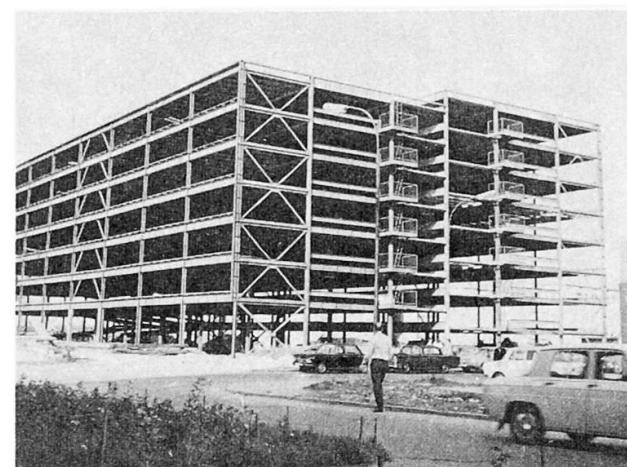


Fig. 4 Steel structures during erection



Fig. 5 Multi-garage-building at Bratislava

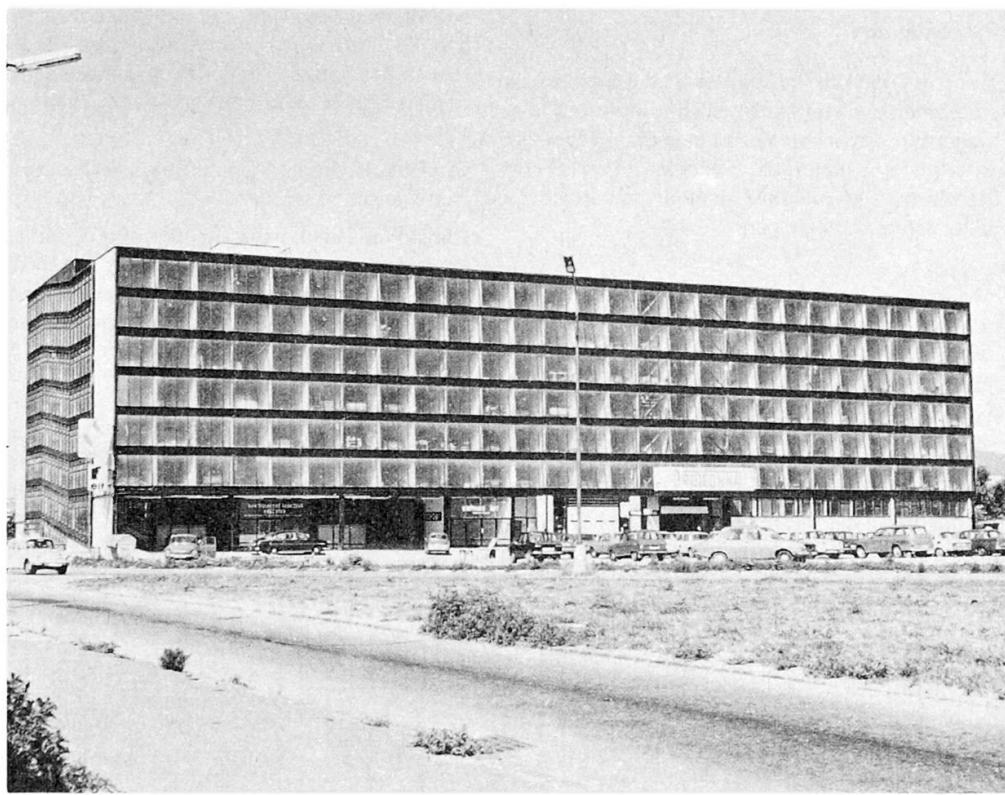


Fig. 6 Look on the long side