

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 2 (1978)
Heft: C-4: Structures in the USSR

Artikel: New 360 m high television tower structure in Alma-Ata
Autor: Ostroumov, B.V. / Morozov, Ye.P.
DOI: <https://doi.org/10.5169/seals-15105>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 04.05.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



12. New 360 m High Television Tower Structure in Alma-Ata

Designed by: TSNIIproektstalkonstruktsiya, USSR

Dimensions:

Height: 360 m

Body diameter: 18.5 – 9.0 m

Material:

Grade of steel for main structure: C 60/45

Mass:

of metal structural members: 3700 t

including the antenna structure: 250 t

Consumption of steel per linear meter of the tower: 14 t

A new 360 m high television tower is being constructed in Alma-Ata, Central Asia, on the summit of the Kok-Tiube mountain. The relatively small size of the construction site determined the choice of the tower design with a small body diameter at the base. This was also conditioned by a specific combination of design wind and seismic loads.

The tower consists of the main body and the antenna structure. The body has a base of 18.5 m whose diameter decreases with height in a step-by-step manner to 13 and 9 m. The antenna structure has a height of 120 m and consists of cylindrical shells with a base 3 m in diameter which decreases in a stepped manner to 2.6, 1.72 and 0.72 m.

The body structure has been designed in the form of latticed prisms. The vertical chords are of welded I-beams connected by a lattice of angle shapes and welded I-beams struts. It is

for the first time that a structure of this type has been constructed using welded I-beams of C 60/45 grade steel 16Г2АФ. The body is assembled from all-welded panels 8.0 m high. Chords of separate sections are interconnected by welding.

Along the body height and perimeter the lattice fills the side faces along the section heights in a staggered way which excludes field joints of the diagonals. Parts of the body with a different diameter are interconnected telescopically. The upper, smaller diameter, part enters the lower part having a larger diameter. Chords of the interconnected body parts are connected radially by a lattice. This allows the moment induced by eccentricity of the chords to be resisted by the transverse membranes. To lower the aerodynamic resistance of the structure, the latticed faces of the body are covered with corrugated aluminium alloy panels. At a height of 170 and 244 m annular technological rooms are constructed; inside the tower body there is a staircase which passes into a step-ladder in the antenna structure. There are two 1000 kg lifts operating inside the tower, one to the rooms at 170.0 m, the other to the room at the height of 244.0 m. To reach the antenna structure sections, a 200 kg capacity rack hoist is used. To decrease the amplitude of oscillations of the tower resulting from wind and seismic loads, special dampers are installed at several levels along the height of the tower.

(B. V. Ostroumov, Ye. P. Morozov)

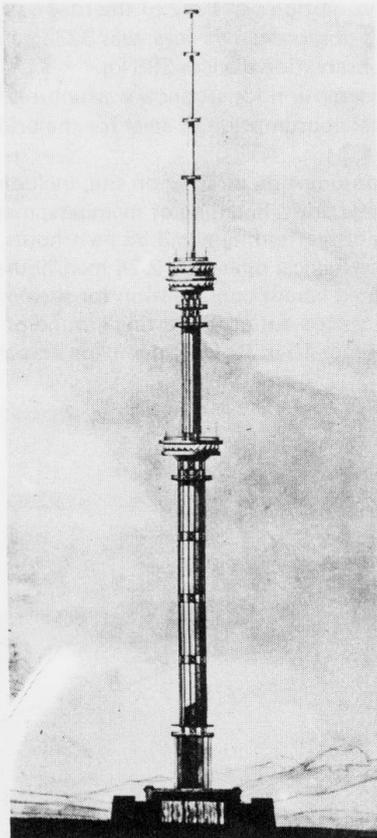


Fig. 1 General View

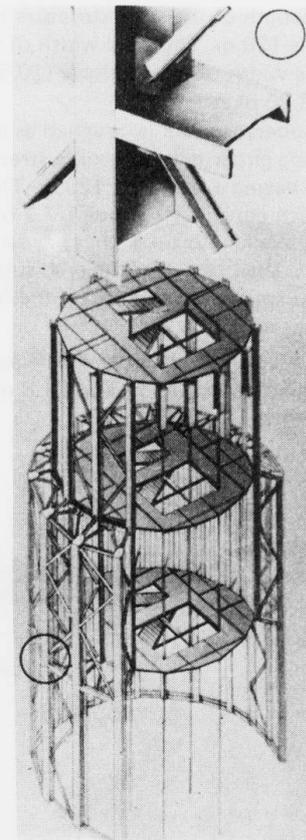


Fig. 2 A Structural Unit of the Tower Body, Junction of Structural Members