

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 2 (1978)  
**Heft:** C-4: Structures in the USSR

**Artikel:** 50'000 m<sup>3</sup> floating roof tank, made by a roll forming method  
**Autor:** Vyshegorodskaya, Z.Yu. / Popovsky, B.V.  
**DOI:** <https://doi.org/10.5169/seals-15107>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 05.03.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



#### 14. 50'000 m<sup>3</sup> Floating Roof Tank, Made by a Roll Forming Method

*Design Institute: TSNIiproektstalkonstruktsiya*

*Dimensions:*

*Height: 17.95 m*

*Diameter: 60.70 m*

*Material:*

*Steel grade for the main structures: C60/45; C46/33*

*Mass:*

*Metal structures: 701 t*

*High-strength steels: 230 t*

*Steel consumption per 1 m<sup>3</sup> of the tank effective capacity:  
14.7 kg/m<sup>3</sup>*

50'000 m<sup>3</sup> floating roof tank is designed for oil and oil products storage.

The tank height is 17.95 m, the diameter is 60.7 m, the floating roof diameter is 60.3 m.

The tank effective capacity is 47'600 m<sup>3</sup>.

For the first time the shell for the tank of the given capacity was fabricated of roll billets.

The floating roof tank is explosion-proof, provides the maximum operation economy, gives advantages concerning fire-resistance and its maintenance is easy comparing to other types of tanks.

The floating roof cuts down by 98 o/o the open surface of the stored products and decreases the losses caused by evaporation.

A seal is placed between the floating roof and the tank shell; the seal structure depends on the product to be stored as well as on climatic conditions.

The tank shell is made of a high-strength steel of C 60/45 grade and of 16Г<sup>2</sup>АФ—12 mark instead of previously used higher strength steel of C 46/33 grade and of 09Г<sup>2</sup>С—12 mark for the tank with a by-plate assemblage of the shell, which was erected in Grozny.

As the high-strength steel was used the maximum shell thickness does not exceed the maximum permissible thickness of rolling — (roll forming) — 17 mm.

To provide stability of the shell leaves in the course of erection the stiffening rings are placed in the 5-th and 8-th shell courses as an addition to the upper stiffening ring which is used as a passage platform.

The tank bottom is designed as a roll-formed structure (made of rolls) with segment border plates.

The floating roof has a circular pontoon. The central part of the floating roof is made of rolls.

The guides and supporting posts of the floating roof are made of pipes.

The institute "Grozgypromneftekhym" worked out a special water outlet device to remove storm waters from the floating roof surface.

The outside shaft stairs and the inside movable stairs are provided.

The mass of steel structures is equal to 701 t.

Saving of steel is 144 t in decreasing of budget allowances by 33'600 roubles comparing to the tank with a by-plate assembled shell which was erected in Grozny.

Two 50'000 m<sup>3</sup> tanks with a roll-formed shell were constructed for the Moscow Oil Processing Plant.

The steel structures were fabricated at the Novokuznetsky tank steelwork plant.

*(Z. Yu. Vyshegorodskaya,  
B. V. Popovsky)*

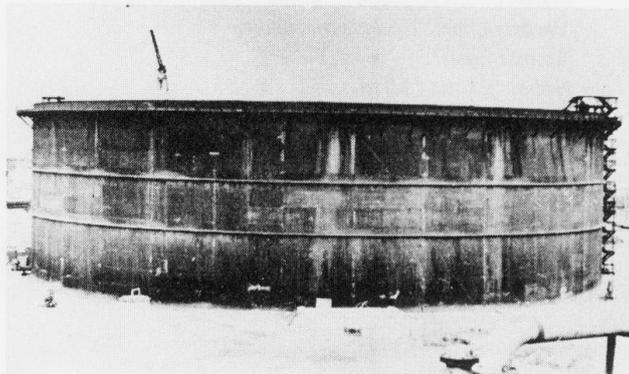


Fig. 1 General View of the Tank

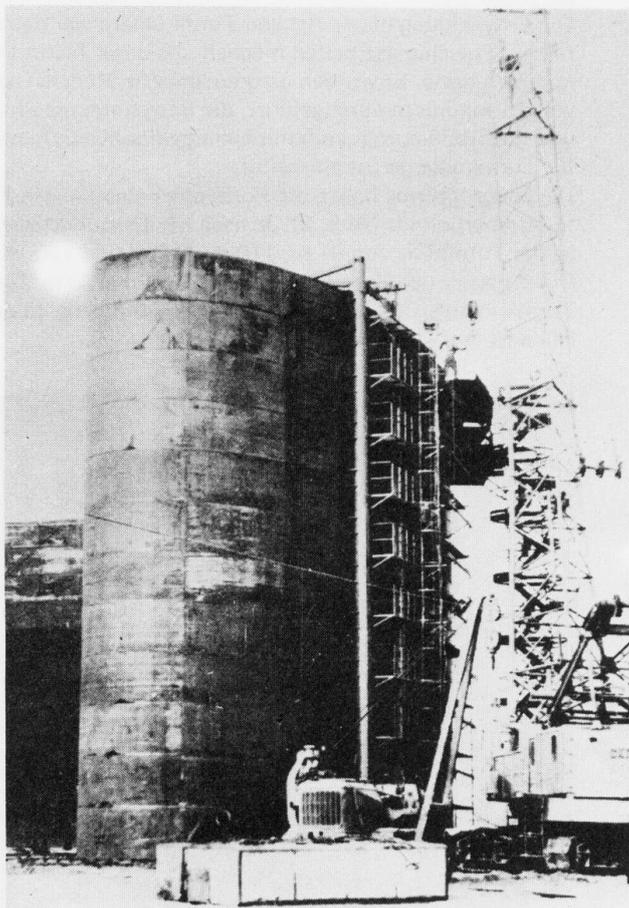


Fig. 2 Erection made by a Roll Forming Method