

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 3 (1979)  
**Heft:** C-7: Structures in Switzerland  
  
**Artikel:** The construction of the post office in Basle  
**Autor:** Walther, R.  
**DOI:** <https://doi.org/10.5169/seals-15772>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 07.08.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## 8. The Construction of the Post Office in Basle

*Owner: Swiss Post Telegraph and Telephone*

*Architect: Suter & Suter AG*

*Structural Engineers: Gruner AG, Jauslin & Stebler AG,  
Dr. R. Walther + H. Mory,  
Emch & Berger AG*

*Contractor: E. Zublin AG, Stamm AG*

*Construction years: 1973 – 1977*

The constant development of postal traffic in the station of Basel necessitated the construction of a new modern and functional building.


As the area of the old post office was insufficient and the new building had to be built near the railway station, it was decided to construct a large part of the building comprising an area of 100 x 100 m<sup>2</sup> above the rails.

The Swiss Railway imposed the following restrictions:

- The railway traffic must be maintained at all times during construction
- Pedestrian platform and the rail traffic could only be closed for short periods, i.e. between one and five o'clock a.m.
- The principal structure must be chosen in a manner that the pillars can be displaced laterally in the future, when the railway station itself will be modified.


For that reason a combination of the beam launching method (Taktschiebverfahren) and of prefabrication was developed and successfully applied.

This was done by first launching six prestressed box girders, weighing about 2000 t each, across the rail area, where solid steel columns had previously been erected on heavy flat slab foundations. A very high centric prestress was chosen for these main girders, in order to allow a later displacement of the columns. The box girder was cast in segments of 20 m length at intervals of one week. In front of each main girder a launching nose and a crane are fixed. The latter is used to place the heavy (36 t) columns directly from railway cars, since the pedestrian platforms were not accessible for movable cranes. The solid steel columns have a diameter of 50 to 60 cm.

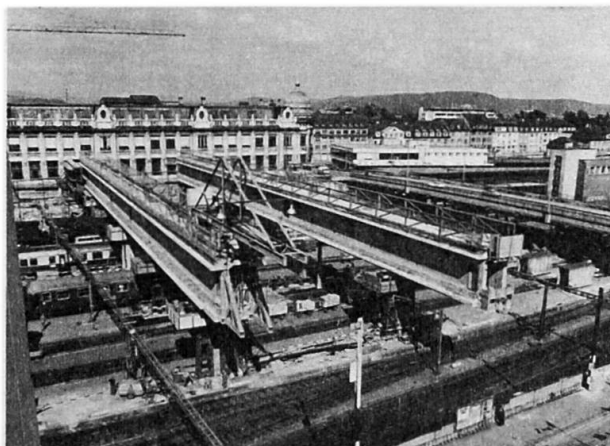


*Fig. 1 Pushing of the main girders across the railway area*

After having launched the main girders, the space in between was filled by about 350 prefabricated prestressed elements of 15 m length. The floor separated by these main girders serves as parking area for the PTT and the public. The upper part of the building, containing the installation of automatic mail distributing systems, could then be constructed by conventional methods, on the existing platform composed of main and secondary girders.

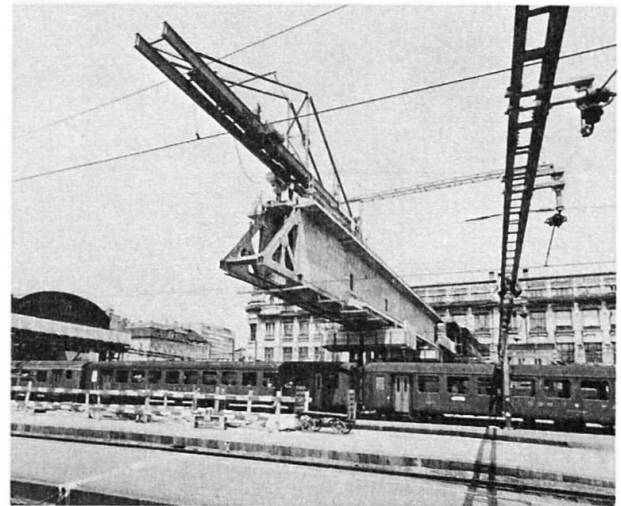

*Fig. 2 Launching nose and crane of the main girders at launching stage*

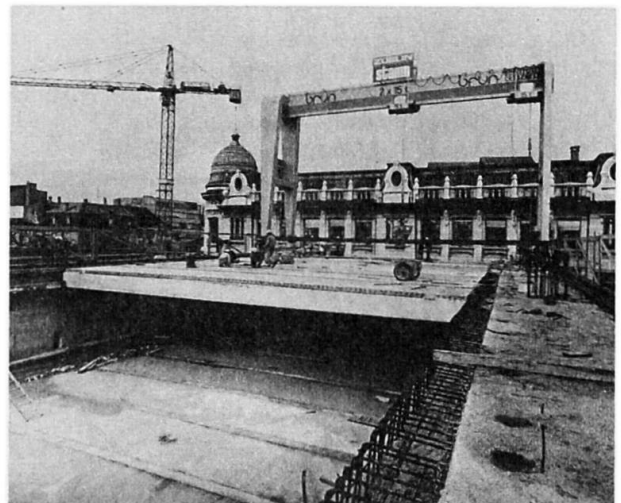

*Fig. 3 Placing of the prefabricated prestressed elements between the main girders*

To obtain a sufficient stability for a building of area 100 x 100 m<sup>2</sup>, weighing 70'000 tons and placed on thin pillars is difficult. Apart from these heavy loads, the structure has to withstand horizontal forces due to creep, shrinkage, temperature, an assumed engine shock of 200 tons, and last but not least seismic forces. The static structural stability was therefore verified by a plastic analysis of the whole system.

More difficult is the verification of the safety against seismic forces. The Swiss Codes specify that the effect of an earthquake be replaced by a static horizontal force representing, in our case, 35 MN. This force cannot be resisted by the pillars. Under these conditions the first idea would be to reinforce the escalator cages and to make the building more rigid. In the light of modern earthquake engineering, this would however be quite wrong, since rigid systems are very sensitive to seismic forces. In this case, it is preferable to leave the system flexible, i.e. without rigid connection to cages or the rigid

part of the building outside the rail area. However, to limit relative displacements, a strong central earthquake column on a foundation floating on neoprene dampeners was constructed, and also the flexible and rigid parts of the building were joined by dampeners. A dynamic analysis has shown that such a flexible, dampened system greatly reduces the effects of earthquake.

(R. Walther)

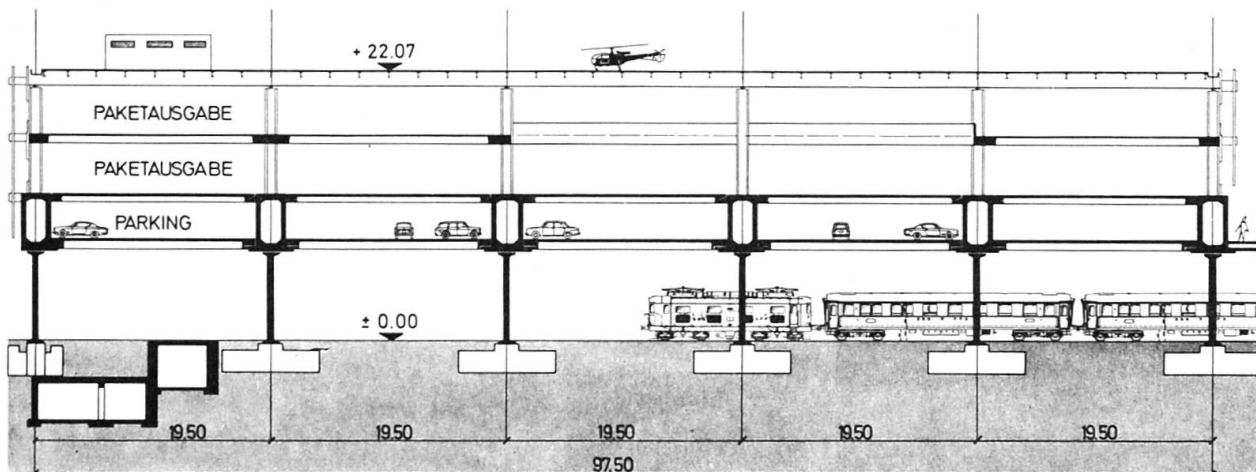


Fig. 4 Cross-section of the building

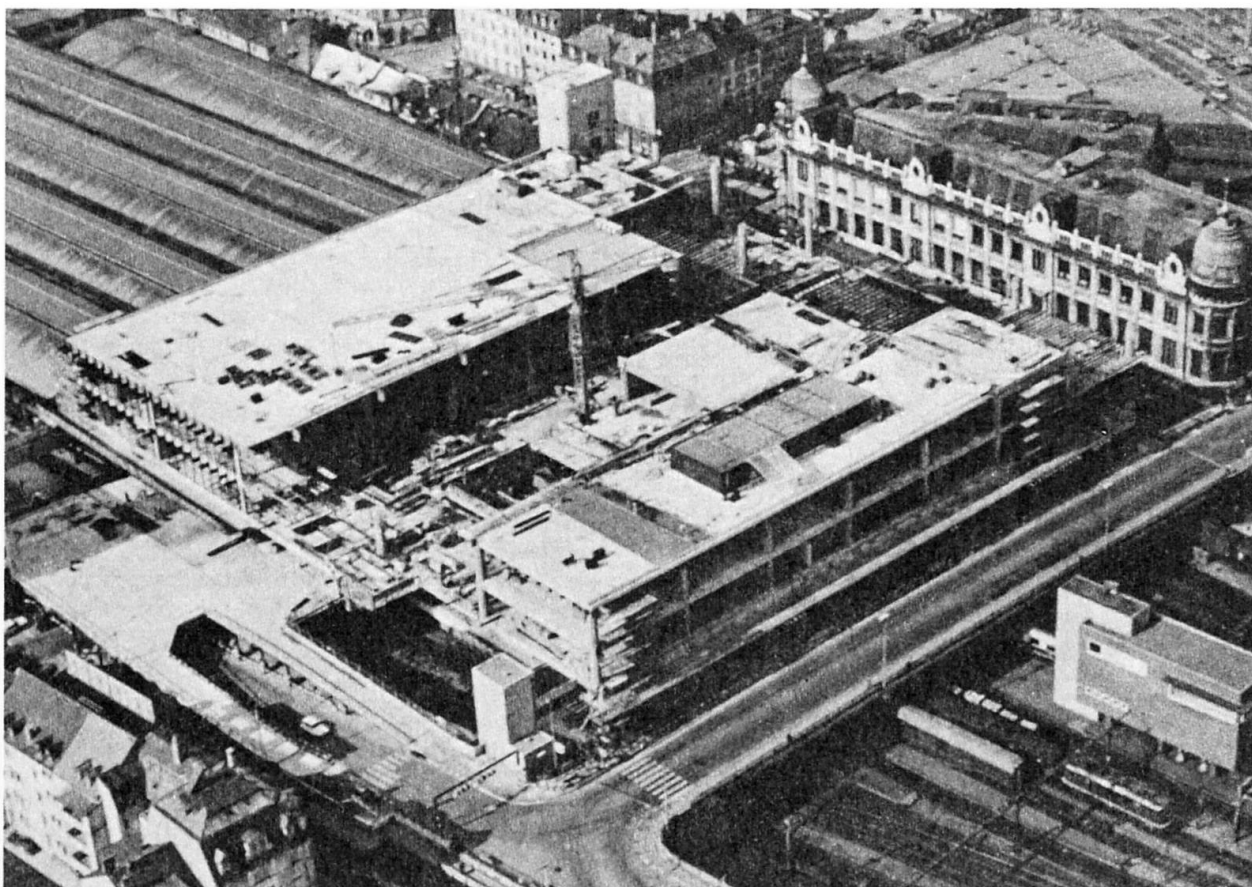


Fig. 5 New Postal Building on the railway station Basel is nearing completion. The old building in the rear will be demolished and replaced by an extension to the first new part of the building.