

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 4 (1980)  
**Heft:** C-13: Sports halls and stadia  
  
**Artikel:** City stadium in Split (Yugoslavia)  
**Autor:** Ordulj, B. / Peranic, S. / Pintaric, N.  
**DOI:** <https://doi.org/10.5169/seals-16538>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 28.12.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## 6. City Stadium in Split (Yugoslavia)

*Owner: Municipal Assembly of Split*

*Architect Designer: Gradjevno Projektni Zavod, Rijeka*

*Engineering: Ivan Lucic Lavcevic Co., Split*

*Hidroelektra Co., Zagreb*

*Industrijsko Projektni Zavod, Zagreb*

*Contractor: Hidroelektra Co., Zagreb and its Subcontractors*

*Completion: 1979*

### Introduction

In Split, a few main sports venues were constructed for the VIIIth Mediterranean Games held in September 1979.

One of the biggest and most beautiful structures is the City Stadium in Poljud. This "Beauty of Poljud" so named because of its superb architectural concept, is able to hold 50,000 spectators-fans of football and athletics.

### The Scope of Construction

The City Stadium is oval shaped in plan-view, having outside diameters of 225 and 210 m, thus resembling a pair of open seashells.

The framework of the stadium consists of 74 radial frames partially composed of prefabricated concrete elements which are connected to the circular ring.

Having been previously prefabricated on the ground, i.e. put in their final position in structure, the frame beams were then lifted up to the top end, rotating around their interior end. They were assembled with two concrete columns. This manner of execution enabled the construction of overhanging cantilevers without scaffolding. For instance, some of these radial frames have a length of up to 40 m and the cantilever of up to 18 m (Fig. 1 and 2).

The top edge of the cantilevering concrete structure is held together upon the circular ring and stressed with annular force of 15,000 kN. Three BBRV tendons, each of 5,000 kN, with 108 wires dia 7 mm pass along the circumference of approx. 700 m, with the radial girders acting as deviation points. The tendons are anchored in four buttresses and coupled in between, requiring in total 24 tendons of approx. 95 and 100 m length respectively. Six couplings with WIGA force-measuring sleeves enable the checking of the tendon force during the actual prestressing and later on too.

The special Stahlton-Flex ducts had been installed between each of two frames in the open space, with the metal corrugated ducts being installed in the top edge of the frames and in the buttresses. After con-



Fig. 1 View to the City Stadium

creting these and the ring diaphragms, the tendons were pulled through the ducts, coupled and fixed in the buttresses. In the buttresses every tendon of 5,000 kN is divided into two tendons each one of 2,500 kN. The tendons were simultaneously prestressed by 8 jacks of 250 Mp in 4 stages, and protected by cement grouting.

The prestressing works have been wholly performed by Geotehnika Co., Zagreb in consultation with Stahlton A.G., Zurich (Fig. 3 and 4).

3,000 prefabricated concrete steps for the stands were placed onto the frame girders.

The eastern and western stands of the stadium are completely covered with a  $205 \times 47$  m roof structure constructed by the Mero system. These are two steel lattice spherical structures, being woven by 12,384 steel sticks, 3,525 ball-knots and 56 bearings. The max. span of this spherical structure is 210 m. For the roof covering Plexiglass Lexan was used.

The quantities of materials used in this structure are:

– Concrete	65,000 m <sup>3</sup>
– Reinforcement	6,000 t
– High tensile steel wire dia 7 mm	76 t
– Steel arch Mero	686 t
– Roof covering Plexiglass Lexan	17,000 m <sup>2</sup>

#### Remarkable aspects

- The major part of the structure is composed of the prefabricated components. The weight of the heaviest element reached 200 t.
- The special usage of BBRV tendons for the ring prestressing.
- One of the largest arch spans ever achieved in the Mero system.
- A record erection time has been achieved in spite of some difficulties encountered on the building site.

(B. Ordulj, S. Peranic, N. Pintaric, V. Rimac)

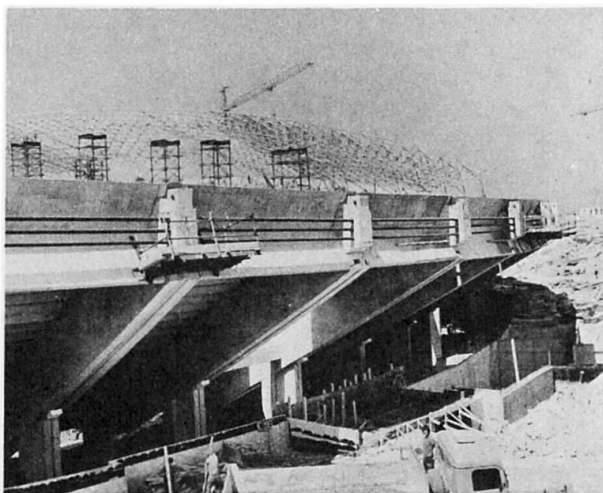


Fig. 4 Details of the Frame and Ring Structure

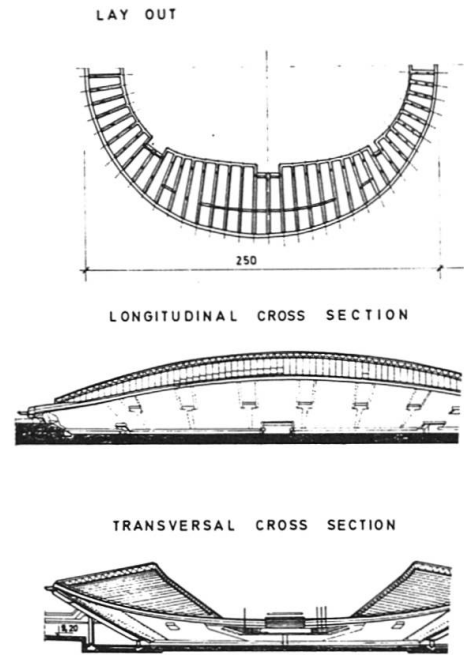


Fig. 2 Sketch of the Stadium

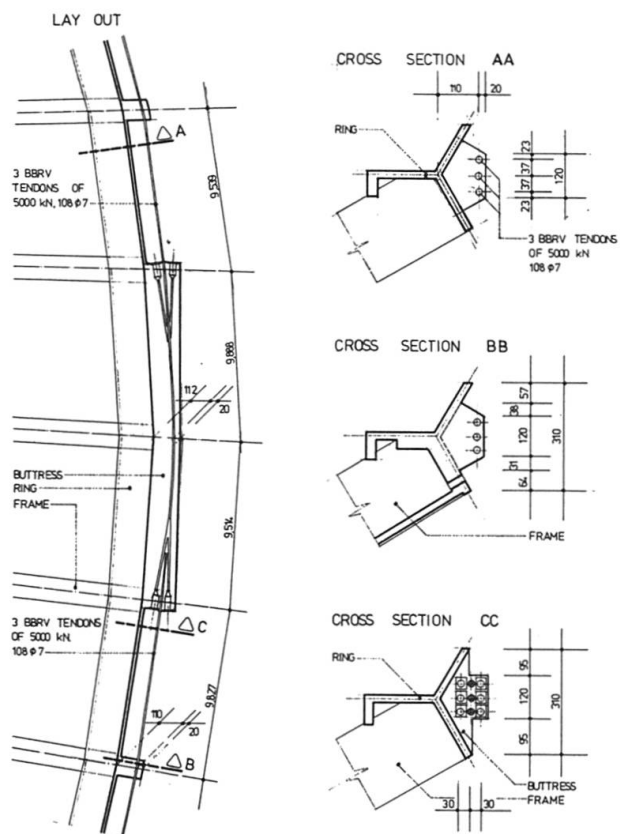


Fig. 3 Details of the Ring