

Objekttyp: **Advertising**

Zeitschrift: **IABSE structures = Constructions AIPC = IVBH Bauwerke**

Band (Jahr): **5 (1981)**

Heft C-18: **Structures in the Middle East**

PDF erstellt am: **29.04.2024**

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.


Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

A QUANTUM LEAP FORWARD...

...IN THE STATE OF THE ART
for BRIDGE and PARKING STRUCTURE REHABILITATION

Wabo[®]Crete FMV ELASTOMERIC CONCRETE SYSTEM

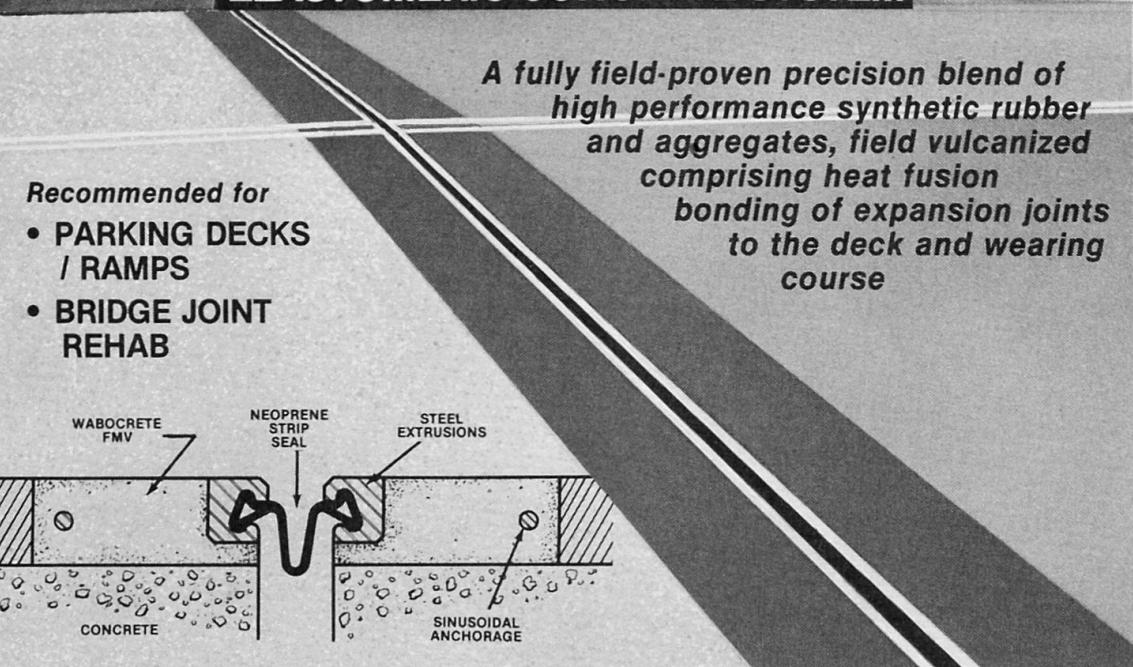

Recommended for

- PARKING DECKS / RAMPS
- BRIDGE JOINT REHAB

A fully field-proven precision blend of high performance synthetic rubber and aggregates, field vulcanized comprising heat fusion bonding of expansion joints to the deck and wearing course


WABOCRETE FMV is ideal for lane-at-a-time rehabilitation work. Its rapid installation and heat fusion vulcanizing require about 2 hours. It serves as an energy absorbing, spall & crackfree, impervious expansion joint end dam in one piece from curb to curb.








The relatively short service life of epoxy mortar and bituminous concrete dams being 3-5 years, WABOCRETE FMV provides a much improved service life and life cycle cost effectiveness with a successful history of installation of up to 9 years on

the heaviest trafficked bridges in Europe.

WABOCRETE FMV has the ability to flow and fill in any spalls, cracks or inconsistencies within the block-out area. The transition dam is match cast to the deck. Fusion bonding of elastomeric concrete to deck and overlay material eliminates expansion anchors to minimize any possibility of loosening under repetitive loadings of heavy traffic.

Details and installation procedures are incorporated in Catalog No. WB-117. Write or call today.

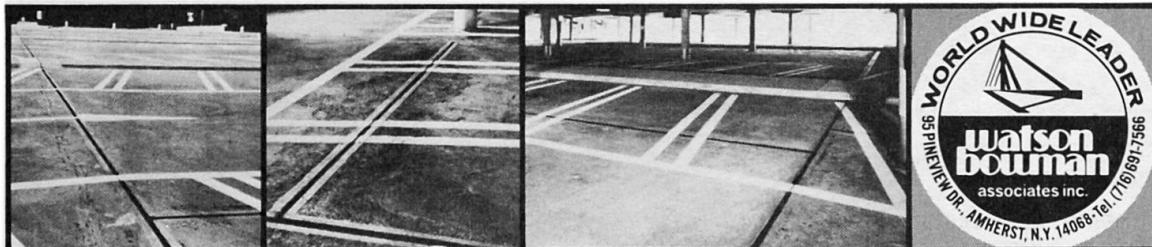

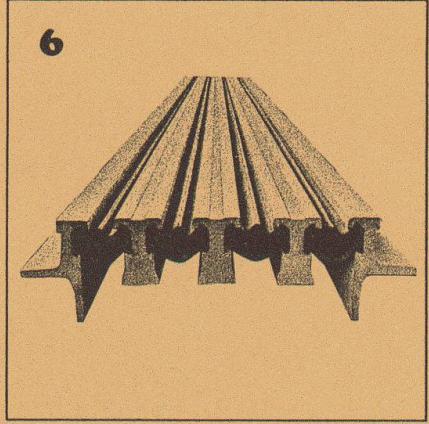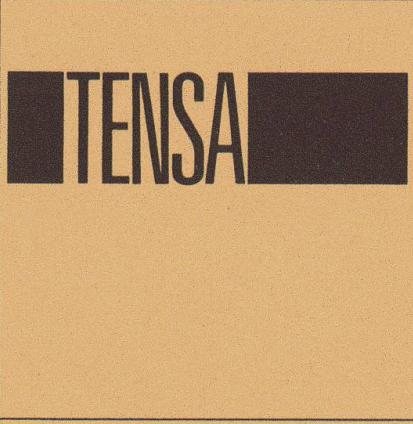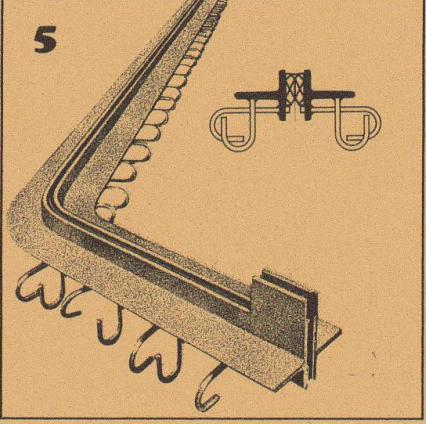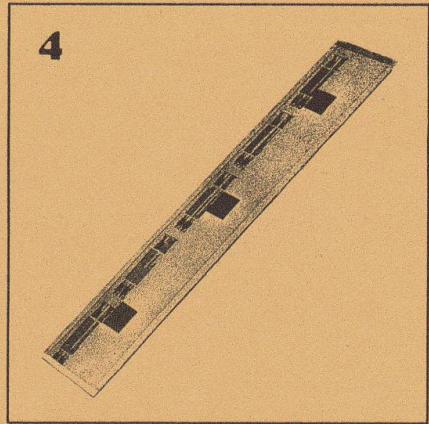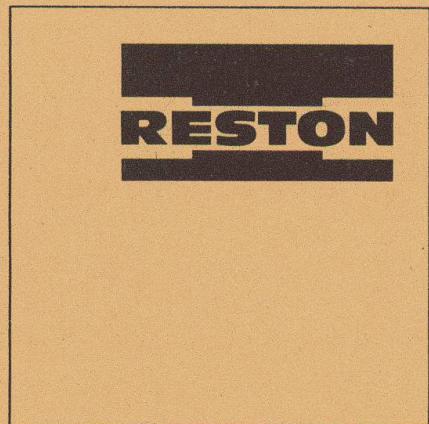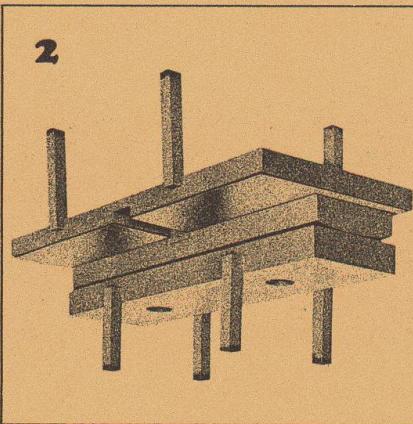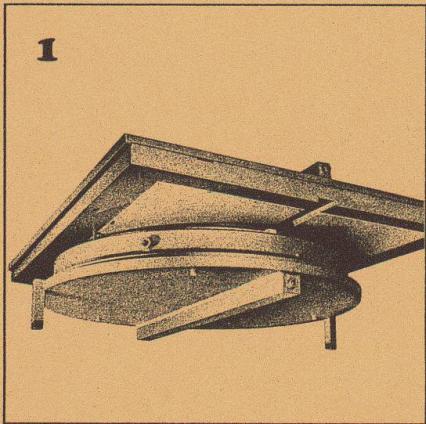

1
RESTON Pot Sliding Bearings
 are highly suitable for installation in bridge structures.
 They feature a low-profile design, low weight and high loading capacity.

2
RESTON Linear Tilting and Sliding Bearings
 are a combination of normal linear tilting bearings and PTFE sliding bearings and are suitable for installation in bridge structures.

PROCEQ SA
 Riesbachstrasse 57
 CH-8034 Zurich

3
LASTO-BLOCK Bearings
 are suitable for building, civil engineering and bridge construction applications. Their simple form allows easy installation.

4
LASTO-STRIP Bearings for Buildings
 were especially developed for building constructions. They are particularly suitable for movement compensation between concrete slabs and load-supporting walls and prevent structural cracking.

5
TENSA-ACME Roadway Construction Joints
 are highly suitable for installation in traffic levels (parking lots, bridges, airport areas etc.). Dilatation up to 60 mm.

6
TENSA-LASTIC Roadway Construction Joints
 meet all the requirements that can be made in bridge engineering of a modern joint design. They are rugged and watertight. Dilatation range 60 mm and bigger.

proceq

Phone: 01/477800
 Telex 53357 proce ch

First-order evolution in geodesy and industry

Modern technology has come up with a new precision level, the **Wild N3**, designed to bring the highest accuracy to the most varied tasks: first-order levelling for geodetic control, deformation measurements, determining subsidence and monitoring crustal movements. It's perfect too for industry and laboratories: for checking, aligning and positioning machinery, and for measuring inclinations.

The powerful **panfocal telescope** has over $40\times$ magnification at normal sighting distances, yet it will focus to a scale only **30 cm (12 inches)** from the objective. The field of view widens at short distances. And it's an alignment telescope with remarkable stability of the line of sight.

With the calibrated tilting screw, small angles and changes in inclination can be measured with micro-

meter accuracy for optical tooling purposes as well as for river crossings in geodesy. The autocollimation eyepiece converts the N3 into an autocollimation instrument; the laser eyepiece transforms it into a laser level.

The **Wild N3** is an ultramodern precision level. From its predecessor it has inherited its unmatched accuracy – a standard deviation of ± 0.2 mm for 1 km double run levelling – and its absolute reliability.

For colour brochure Wild N3

Send this coupon to your next Wild representative or directly to Wild Heerbrugg Ltd., CH-9435 Heerbrugg, Switzerland.

Name _____

Company _____

Address _____

IVB 9-1

**Wild Heerbrugg Ltd.
CH-9435 Heerbrugg, Switzerland**

