

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 7 (1983)
Heft: C-25: The Itaipu Dam: Design and construction features

Werbung

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation


L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 03.05.2026


ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

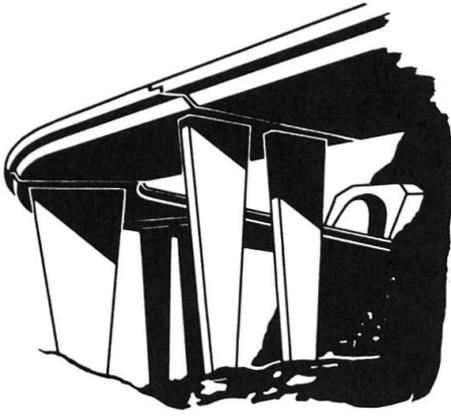

Belags-Sickerwasser-Ableiter

Subsurface Seepage.
Evacuations des eaux et aérations.

Ductos de agua de filtración para calzadas.

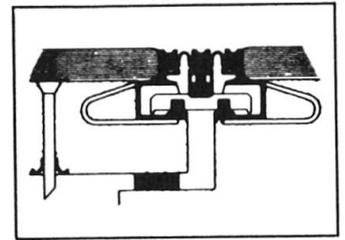


Fahrbahn-Übergangs-Konstruktionen.

Expansion joints.

Raccordements de chaussées

Sistemas de juntas de dilatación.


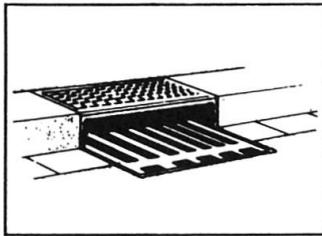


Entwässerungs-Systeme

Surface drainage

Evacuations des eaux

Pozos de drenaje

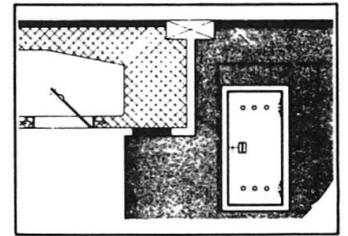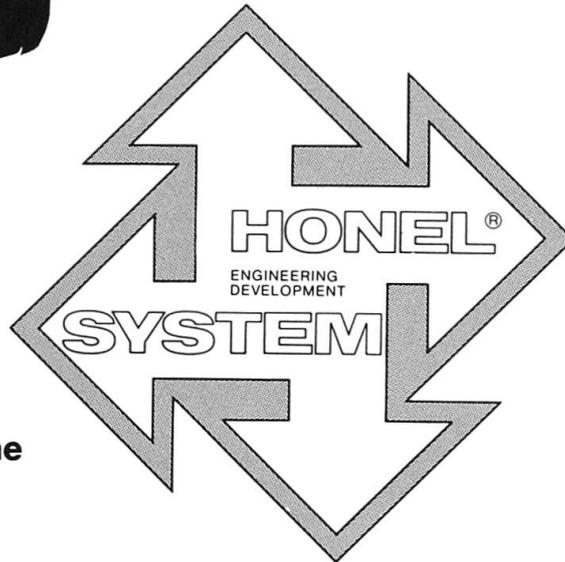

Hohlraumschalungen


Einstiegsluken + Türen

Formwork + Moulds

Access openings

Ouvertures d'entrée

Aberturas de entrada

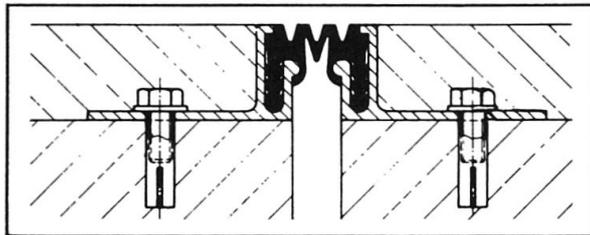

Fugendichtungen im Hoch- + Tiefbau

Joint seals + Joint profilés

Sellos para juntas



Auflager

Structural

Bearings

Appuis

Apoyos

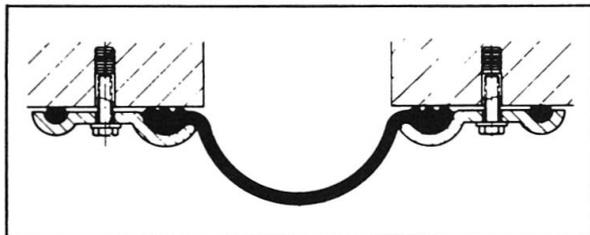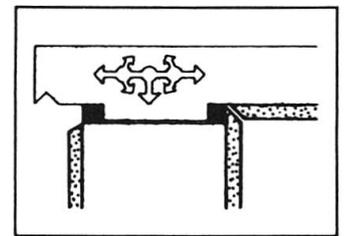

Pressen + Pumpen

Hydraulic jacks

Verins + Pompes

Prensas + bombas











heinz honegger ag

CH-8427 Rorbas ZH Switzerland
 Tel. 01 - 865 11 77, Telex 52844

Vertretungs- und Lizenzvergabe:

Honel-Holding SA
 Sonnmatstrasse 6
 CH-8180 Bülach, Switzerland
 Phone 01/860 89 43



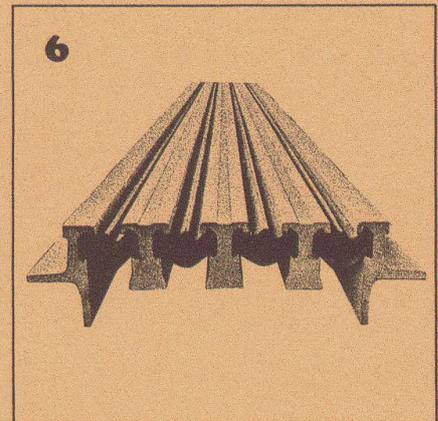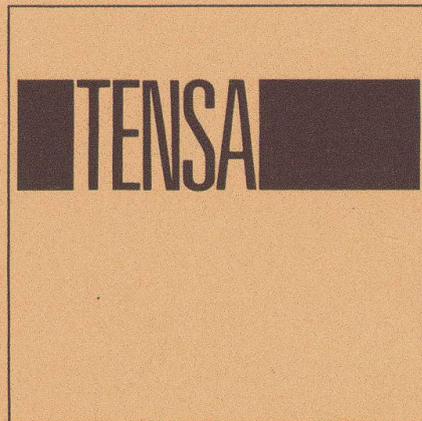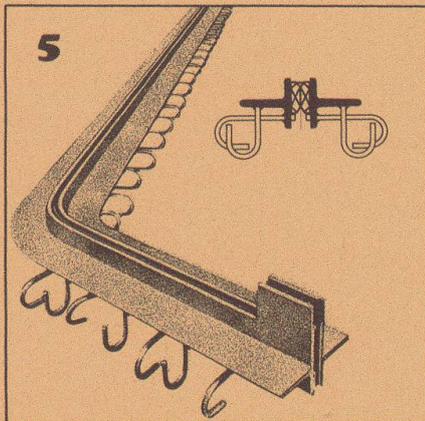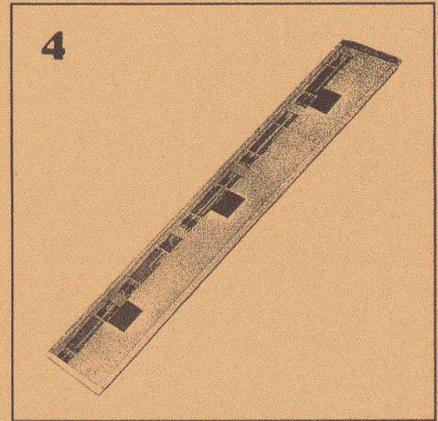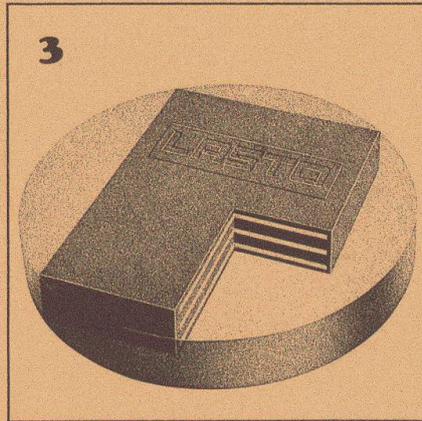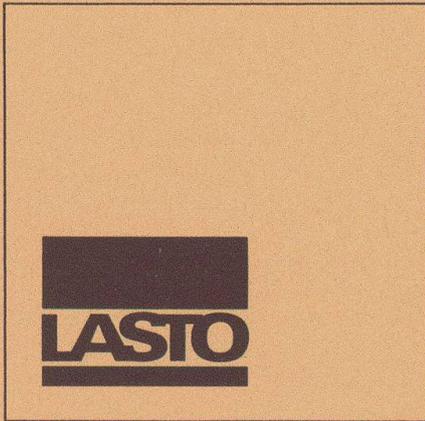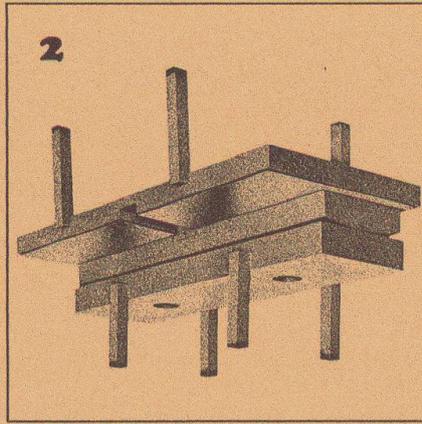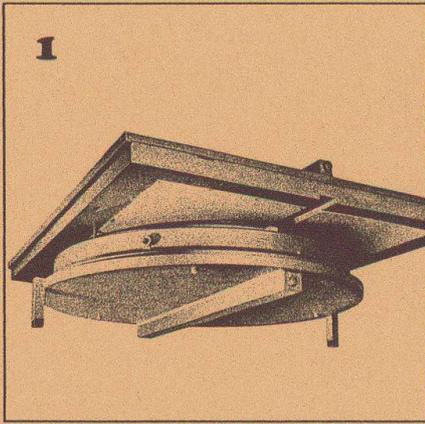

1
RESTON Pot Sliding Bearings are highly suitable for installation in bridge structures. They feature a low-profile design, low weight and high loading capacity.

2
RESTON Linear Tilting and Sliding Bearings are a combination of normal linear tilting bearings and PTFE sliding bearings and are suitable for installation in bridge structures.

3
LASTO-BLOCK Bearings are suitable for building, civil engineering and bridge construction applications. Their simple form allows easy installation.

4
LASTO-STRIP Bearings for Buildings were especially developed for building constructions. They are particularly suitable for movement compensation between concrete slabs and load-supporting walls and prevent structural cracking.

5
TENSA-ACME Roadway Construction Joints are highly suitable for installation in traffic levels (parking lots, bridges, airport areas etc.). Dilatation up to 60 mm.


6
TENSA-LASTIC Roadway Construction Joints meet all the requirements that can be made in bridge engineering of a modern joint design. They are rugged and watertight. Dilatation range 60 mm and bigger.

PROCEQ SA
 Riesbachstrasse 57
 CH-8034 Zurich

proceq

Phone: 01/47 7800
 Telex 53357 proce ch


14 km away with millimetre accuracy within seconds

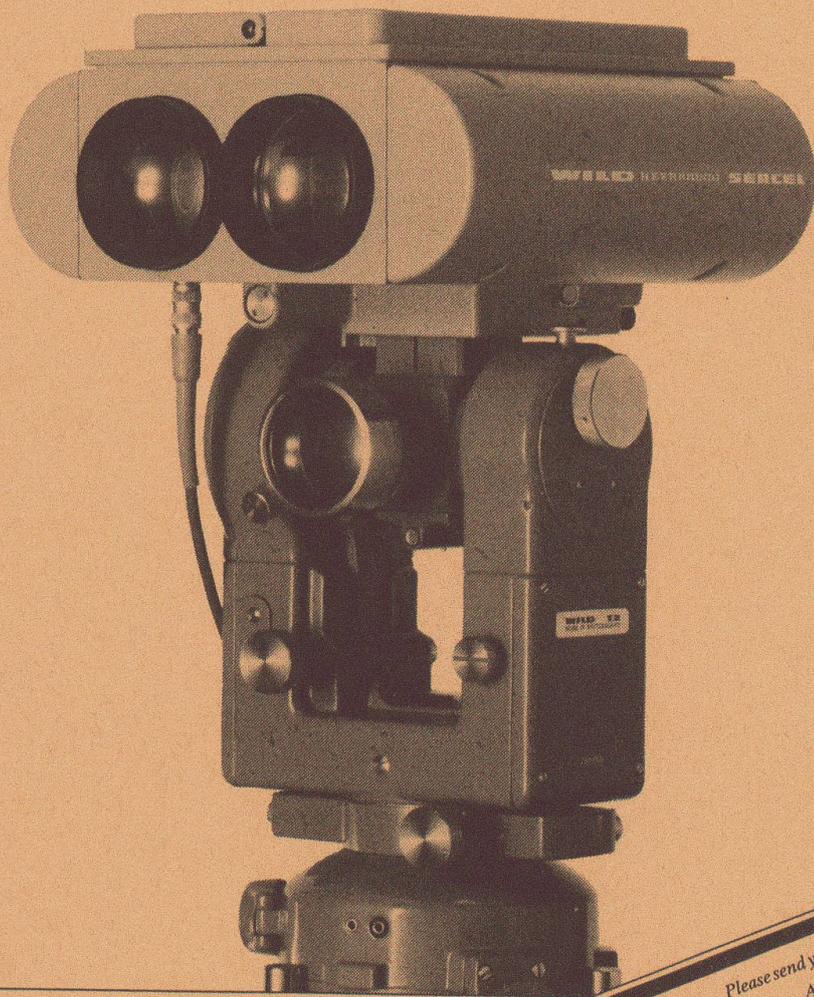

is how the Wild DI20 Distomat measures.

We have perfected infra-red distance measurement. The latest proof: with the Wild DI20 you can measure up to 14 km, and as much as 6 km to a single prism. In six seconds, the Wild DI20 will measure with an accuracy of $\pm 5 \text{ mm} + 1 \text{ ppm}$.

Would you like to know more about it? Then send for detailed literature today! ■

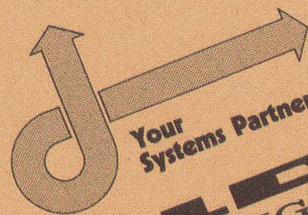

WILD
HEERBRUGG

Please send your technical literature to: Wild DI20
Address

Send to your nearest Wild representative
or to Wild Heerbrugg Ltd,
CH-9435 Heerbrugg,
Switzerland.

IVB 2-3