**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke

**Band:** 7 (1983)

**Heft:** C-27: Recent structures: Part I

**Artikel:** Two gigantic offshore platforms (Japan)

Autor: Senpaku, A. / Oh-hama, S.

**DOI:** https://doi.org/10.5169/seals-18280

# Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Mehr erfahren

## **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. En savoir plus

#### Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. Find out more

**Download PDF: 11.12.2025** 

ETH-Bibliothek Zürich, E-Periodica, https://www.e-periodica.ch

# Two Gigantic Offshore Platforms (Japan)

# North Rankin "A" Jacket

Owner:

72

Woodside Offshore Petroleum Pty.,

Ltd (abbr. WOP), Australia

Designer:

Earl & Wright Consulting Engin-

eers, USA

Contractor:

Nippon Kokan K.K., Japan

The North Rankin "A" Jacket was constructed at Tsu Works between April 1980 and April 1982 for use in the development of a natural gas field in the north-western part of Australia. In its construction, various new technologies were fully exploited, such as a large block construction method including panel roll-up with a floating crane (the first such process ever used in the world), dimensional control with an electronic tachymeter, loading out of a barge float type from a quay with big tidal changes, welding procedure requiring high quality (including COD test), etc.

### (1) Scope of work:


Material procurement, fabrication, load out, up to and including tie-down operation.

(2) Configuration: 8 leg bargelaunch type


(3) Water depth: 124.5 m

(4) Dimensions:

Top section 38.4 x 60.4 m Bottom section 67.4 x 82.9 m Overall height 146.5 m

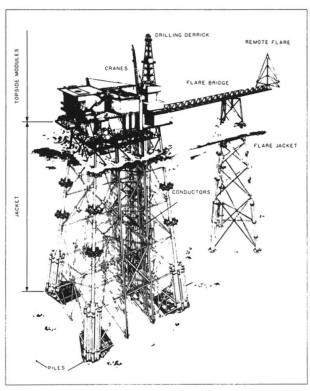

Overall view of North Rankin "A" platform Fig. 1

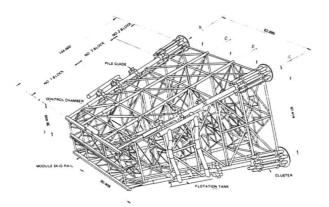

IABSE PERIODICA 4/1983

Fig. 2 North Rankin "A" jacket blocking

#### (5) Weight:

Weight at the time of load out Jacket structure 15,000 t approx. 2,000 t approx. Floatation tanks 3,000 t approx. Carried piles Piping & Others 2,000 t approx. 22,000 t approx. Total

Dimension and thickness of principal members

Inner leg:  $1600 \text{ mm } \emptyset$ , 85 mm max.

plate thickness

Outer leg:  $1500 \text{ mm } \emptyset$ ,  $3000 \text{ mm } \emptyset$ ,

4500 mm  $\phi$ , 65 mm max.

plate thickness

600-1300 mm  $\phi$ , 70 mm max. Brace:

plate thickness

F. Tank:  $4000 \text{ mm } \phi$ ,  $5000 \text{ mm } \phi$ ,

15-20 mm plate thickness

BS4360 50D modified (7) Material:

Basically, the jacket was divided into three blocks along the length of the structure as shown in Fig. 2. Each member was assembled on ground in extremely large sub-blocks (weighing in the neighbourhood of 1000 t) and subsequently put into place using a 3000 t floating crane barge. For this purpose, the No. 1 block was built close to the quay and then "skidded" inland to allow for assembly of the No. 2 block near the quay. In this way, a "skid back" construction method was implemented. The floating crane was used twelve times to lift panels built of legs and braces into place and also to lift the floatation tanks into an upright position and to lift the clusters into place. As a result, a lot of high altitude work could be avoided, and use of large land cranes could be conserved.

On April 26th, 1982 the North Rankin "A" Jacket was towed out to sea by two ocean-going tugboats. On May 22nd, after a 6,000 km voyage, the jacket arrived at north-western part of Australia. And, on June 6th, it was successfully set on the seafloor.



#### Iwaki Platform Jacket

Owner: Esso Petroleum, Japan and Teikoku Oil Co.

Ecco Petroleum Janan

Design and supervision: Esso Petroleum, Japan
Fabrication: Nippon Steel Corporation

In the summer of 1983, the second offshore platform in Japan was installed 41 km off the northern pacific coast in 154 m of water. This Iwaki Project is being jointly implemented by the Esso Group and Teikoku Oil Co., and is aimed at supplying natural gas to the Tokyo Electric Power Co.'s Hirono power station. Orders for the construction of the project's offshore facilities were divided by scope of work, and nearly all of them were awarded to Japanese contractors.

A jacket fabrication was completed at the Wakamatsu Fabrication Center of Nippon Steel Corporation in April 1983. Special capabilities were required to fabricate this 15,000-metric ton, 160-meter high jacket in order for it to withstand harsh environment conditions at the site such as earthquakes and typhoons. The above contractor not only supplied the lamellar tearing resistant steels, but also applied two newly developed technologies to speed up fabrication — a computer-aided system for detailed fabrication designs, and an automatic gas shielded metal arc welding system.

Nippon Steel also received a contract for pipelaying work of some 40 km in length. For the submarine pipelaying work, a specially designed derrick/pipelay barge will be used; and for the shore crossing pipelaying work, the Pipeline Arch Drill Method (PLAD), which has been developed by Nippon Steel in coopoeration with Reading & Bates Construction Co. of USA, will be applied.

(A. Senpaku, S. Oh-hama)

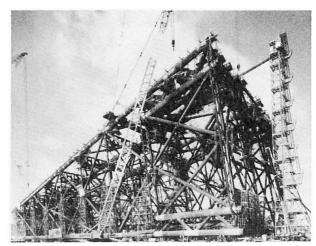


Fig.4 The 15,000 ton Iwaki platform jacket under construction



Fig. 3 North Rankin "A" jacket