

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 7 (1983)
Heft: C-24: Structures in Italy

Artikel: Stayed bridge on the Tanaro at Alba (Italy)
Autor: [s.n.]
DOI: <https://doi.org/10.5169/seals-18259>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 26.07.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



1. Stayed Bridge on the Tanaro at Alba (Italy)

Owner:	<i>Provincial Administration of Cuneo</i>
Architect:	<i>G. Vassallo</i>
Structural steel project:	<i>S. Caramelli, D. Danieli, G. Mazzali, G. Vassallo</i>
Contractor:	<i>Costruzioni Metalliche Finsider S.p.A. Guastice (Leghorn)</i>
Duration of work:	<i>24 months</i>
Service date:	<i>1983</i>
Area of suspended roadway:	<i>3.606 m²</i>
Weight of steel structure + stays:	<i>1935 + 115 t</i>

The Provincial Administration of Cuneo adopted the bridging of the minor bed of the Tanaro with a single span to complete the by-pass of Alba.

The structure, with a single pylon and central suspension, involves the use of a continuous beam in two sections of 48.8 m and 114.3 m with reference to the pylon and the two banks of the stream.

The pylon is inclined at 10.4% with respect to the vertical (corresponding to the bisector of the angle of the stays), and is fixed at the base to a foundation block which also provides an intermediate support for the beam.

The beam and the pylon are only connected by the system of stays, resulting in independent action at the point of intersection. The height of the pylon above the foundation level is 35.3 m, and above the main deck 30 m.

The suspension system consists of three stays with anchorage on the beam.

The carriageway will consist of two independent 8 m lanes separated by a 2.50 m separation curb and two footpaths of 0.75 m.

The whole structure is in steel except for the side curbs of the footpaths which are in reinforced concrete and the 6 cm pavement on the orthotropic plate deck.

The beam is made of Fe 52/D steel apart from the consoles which are made of Fe 42/D; the pylon is also in Fe 42/D steel.

The beam is made as a three cell box, a central rectangular cell 11.30 x 2.30 m and two side trapezoidal cells and is terminated laterally by two 3 m overhangs. The height of the section is 2.3 m and is constant along the beam. The beam box is strengthened by a transversal network of diaphragms at 2.5 m intervals and a truss beam.

The main beam is subdivided into 13 segments varying in length from 10 to 18 m. Of these 8 have roughly the same construction characteristics, while the remaining 5 are special, 3 for fixing the roadway,

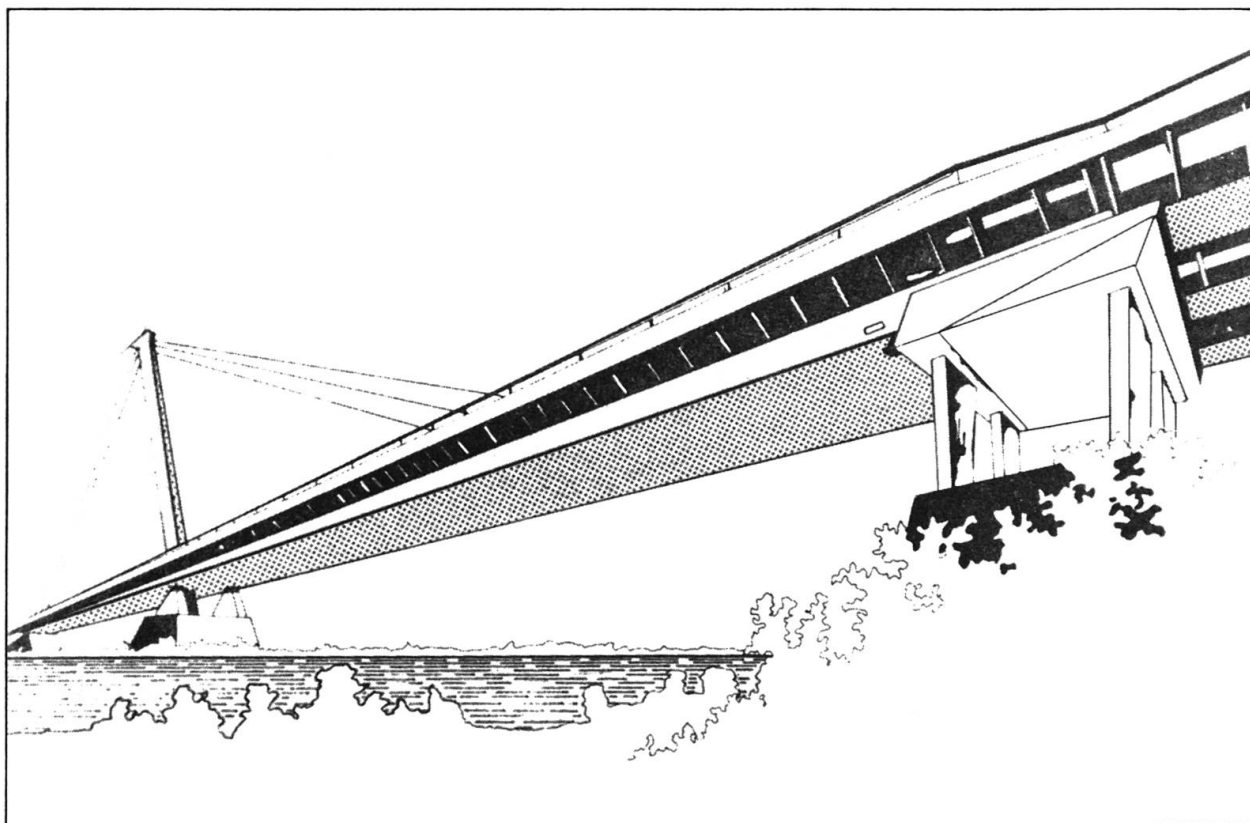


Fig. 1 Perspectives

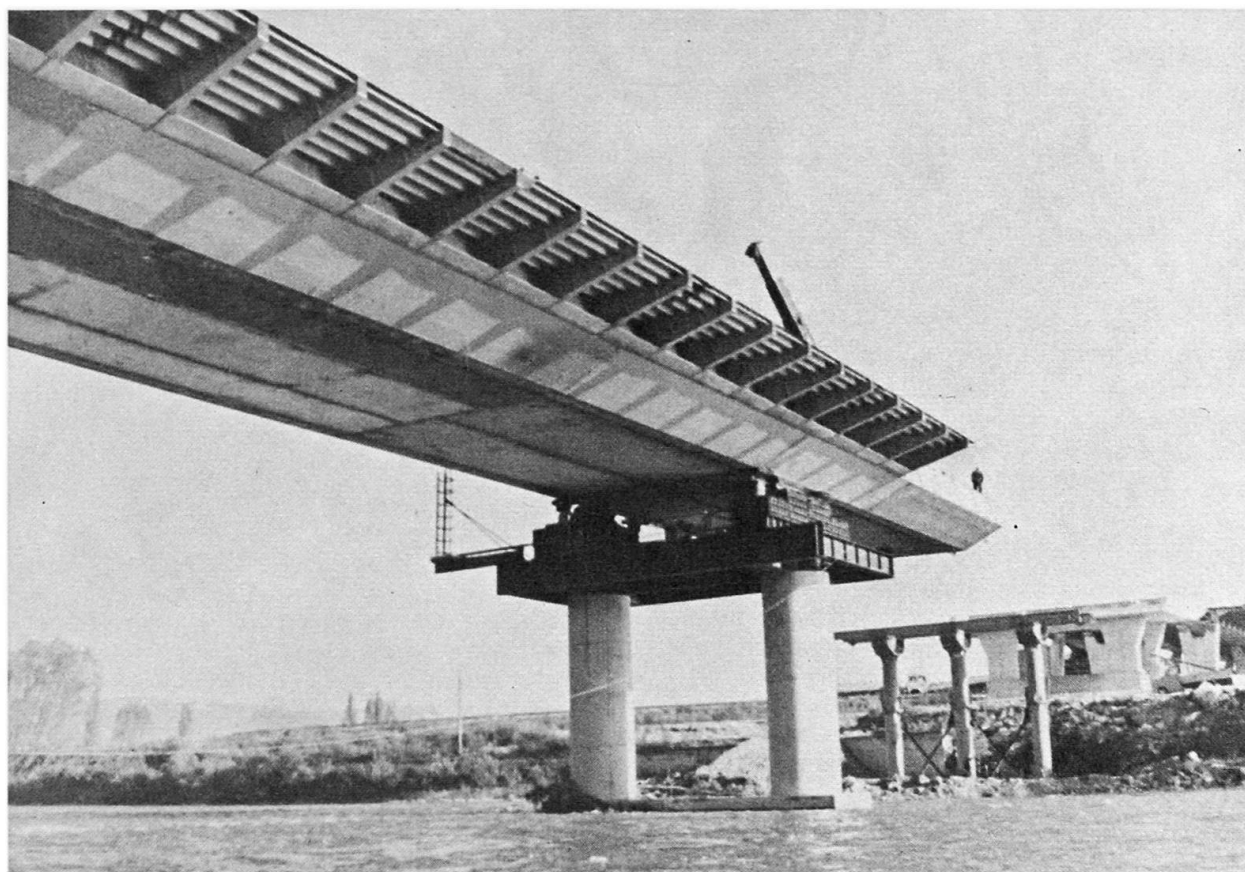


Fig. 2 *The positioning of the main beam*

one for the intersection of the pylon and the central support and one for the abutment end. The main beam is of welded construction with both in the workshop and on site welding.

The deck is an orthotropic plate with the longitudinal braces made of rounded triangular channels placed at 60 cm intervals.

The pylon has a rectangular box section tapering from 2.8 x 2.10 m at the base to 2.3 x 1.7 m at the top with its main stiffness in the longitudinal plane of the bridge.

The section is transversely strengthened by diaphragms placed at 3.5 m intervals.

The pylon is built in 6 sections, each approximately 6.0 m long. The top section differs substantially from the others as its design is dependent on and governed by the pylon-stay mutual constraining system and the requirements for its adjustment. The assembly of the whole pylon was carried out in the workshop.

The cables are continuous and free to slide at the head of the pylon.

Each stay is made of 8 closed spiral cables $\varnothing 82$ mm, arranged in two layers of 4.

In each cable the three outside layers are made of Z wire ($h = 5/6$ mm), while the rest are round wires ($\varnothing = 4.37$ mm). Only the two outside layers have been galvanized.

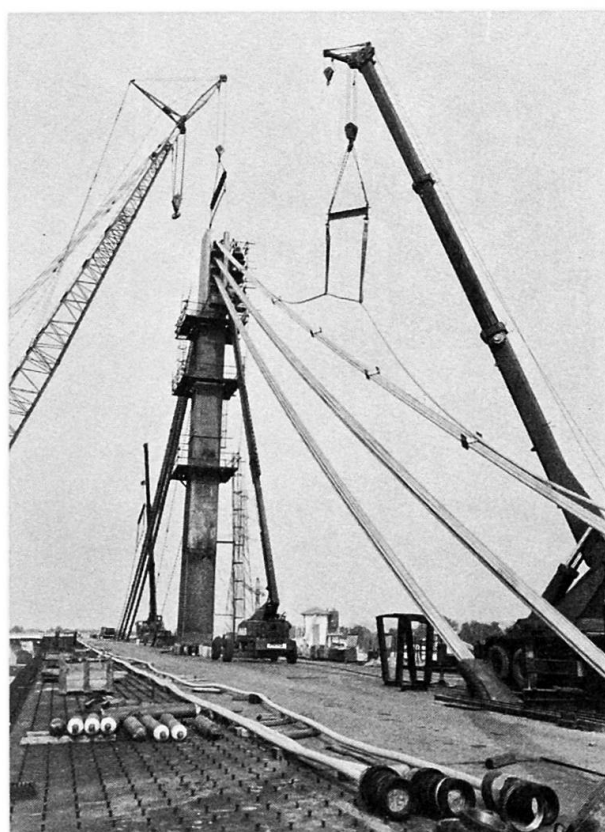


Fig. 3 *Mounting of stays*