

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 8 (1984)
Heft: C-29: Structures in Canada

Artikel: Stadium at B.C. Place, Vancouver, (British Columbia)
Autor: Nitkin, I.M.
DOI: <https://doi.org/10.5169/seals-18821>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 08.07.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



7. Stadium at B.C. Place, Vancouver, (British Columbia)

Owner: *British Columbia Place Ltd., a
Provincial Crown Corporation*

**Architect and
Engineer:** *Phillips Barratt, Vancouver, B.C.*

**General
Contractor:** *Dillingham Construction, North
Vancouver, B.C.*

**Duration of
Work:** *30 Months*

Opening Date: *June, 1983*

The Stadium at B.C. Place (Fig. 1) is a covered multi-purpose stadium with 60'000 seats, serving the 1.5 million people of the British Columbia lower mainland. Located in downtown Vancouver, it accommodates football, soccer and baseball, and in the half-stadium mode, tennis and basketball, as well as concerts, exhibits, trade shows and circuses. Overall dimension are 190 m \times 231 m, in a superelliptical shape. The interior clear height is 60 m.

Design Concept

The roof, with an unsupported area of 4 hectares (10 acres), had a major impact on the entire design and cost. An inflated fabric roof was selected, necessitating special provisions for air tightness, revolving and pressure balanced doors, a double air-lock system for loading doors, a roof snow-melt system, and emergency generators to supply the fans in the event of a power failure.

The super-elliptical shape was adopted as it satisfied all of the major criteria. It most closely approximates the thrust line of the outer compression ring which anchors the roof cables, minimizing the bending moments. It allowed the optimum sight distances to the playing field, and was the shape most easily contained on the site which is restricted by two adjacent bridges.

Soil conditions were favourable, with good glacial till near the surface over most of the site. All foundations are spread footings, with only one minor exception. Allowable bearing pressure was 380 kN/m². This structure is in seismic Zone 3. The light weight of the roof was a major factor in reducing the cost of seismic resistance.



Fig. 1 Stadium at B.C. Place

Due to the Canadian football field being larger than in the U.S., the 60'000 seats could be arranged on two tiers instead of three, allowing a reduced height and excellent sight lines with much lower slope of risers than in most comparable stadia (Fig. 2). Four perimeter levels provide access to the playing surface, seating, and various services such as storage, food concessions, and media facilities. Levels 1 to 4 are connected by a series of enclosed sloping ramps, evacuating on to an open-air elevated plaza surrounding the stadium.

Moveable and telescopic bleachers provide for quick conversion from one event to another. The rubber-tired moveable steel stands, which are stored under the concrete seating in the baseball mode, were designed by the Engineer and fabricated locally at a comparatively low cost. The synthetic turf system is German-manufactured, 100% polypropylene, and behaves more like natural grass than most others on the market today.

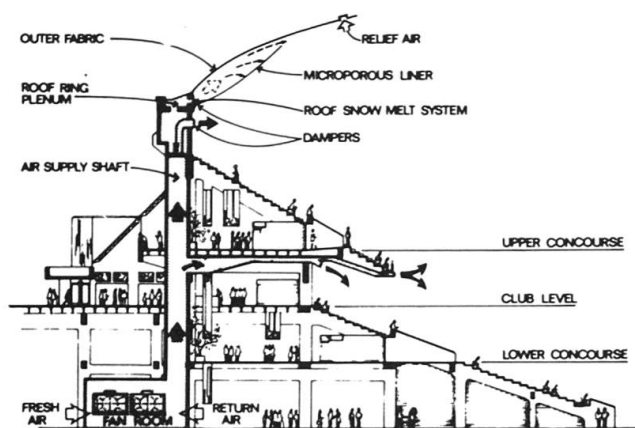


Fig. 2 Cross section of stands

Roof and Structure

As distinct from conventional rigid roof structures, the fabric roof and its steel cable net do not act in bending or shear, but in tension under the action of internal pressure maintained by large fans. Due to the low dead load of approximately 7.3 kg/m^2 , an internal pressure of only 23 kg/m^2 (255 Pa) can easily maintain the inflated mode. To this end, the exterior skin of the building is designed and built to be reasonably airtight. In high wind conditions, a pressure of 600 Pa can be maintained to limit roof motion. Although sixteen 100 h.p. fans are provided, only one-half the capacity of one fan is required to maintain roof inflation.

In the inflated mode, should a snowfall occur, warm air is introduced into the space between the inner and outer fabrics, thus melting the snow and allowing it to slide off the roof. In the deflated mode, the roof will support a snow load of 117 kg/m^2 . The roof panels have drains which open under a low head to facilitate drainage in the deflated mode.

The outer roof membrane is Teflon-coated fibreglass fabric, 1.27 kg/m^2 in mass, and 0.81 mm thick. The inner liner is Teflon-coated microporous acoustic fibreglass fabric, 0.41 kg/m^2 in mass and 0.31 mm thick. The two-way cable net consists of 11 strands in each direction,

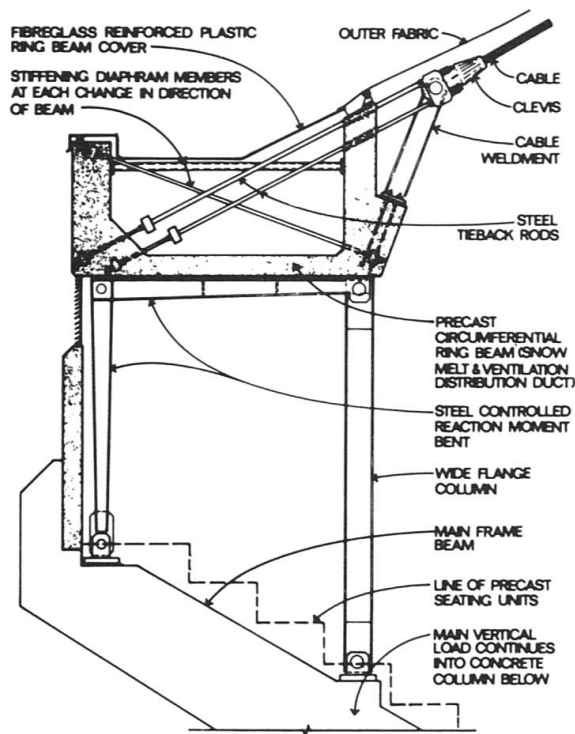


Fig. 3 Compression ring and bent

18 of which are 70 mm in diameter and 4 are 76 mm in diameter, with ultimate strengths of 4022 and 4790 kN respectively. These are anchored into a 700 metre long concrete compression ring, which is supported on stiffness-limited steel bents to control lateral movement, (Fig. 3).

Fifty-four main frames radiate from the field, extending to the underside of the ring support bents. They are cast-in-place concrete, analyzed as ductile moment-resisting frames, and support the precast-prestressed seating and concourse floor units. To facilitate multi-use formwork, most of the beams and columns are sized 600 mm by 1200 mm . Parallel to the field, a cast-in-place tie beam and shear wall system resists the seismic forces.

(I.M. Nitkin)

