

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 10 (1986)  
**Heft:** C-36: Structures in Japan

**Artikel:** Ohnaruto Bridge  
**Autor:** Ohashi, M.  
**DOI:** <https://doi.org/10.5169/seals-19852>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 18.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## 5. Ohnaruto Bridge

<b>Owner:</b>	<i>Honshu-Shikoku Bridge Authority</i>
<b>Engineer:</b>	<i>Honshu-Shikoku Bridge Authority</i>
<b>Contractor:</b>	<i>Honshu-Shikoku Bridge Authority</i>
<b>Dimensions:</b>	
cable span:	93 m + 330 m + 876 m + 330 m
clearance:	41 m above sea level
tower height:	144 m above sea level
cable diameter:	84 cm
width of stiffening truss:	34 m
<b>Quantities of materials:</b>	
anchorage (1A):	96000 m <sup>3</sup> concrete
anchorage (5A):	120000 m <sup>3</sup> concrete
tower:	4200 ton steel (per 1 pier)
cable:	12000 ton steel
truss:	31000 ton steel (in completion of highway) 36000 ton steel (in completion of railway)
<b>Construction Period:</b>	9 years
<b>Service date:</b>	1985

### Introduction

The Ohnaruto Bridge is the one of the bridges in the Honshu-Shikoku Bridge Project whose objective is to construct three different routes, connecting the main Japanese island of Honshu and the island of Shikoku.

The Ohnaruto Bridge across the 1.3 km Naruto Strait between Shikoku and Awajishima Island is a long-span suspension bridge extending a total of 1629 m. The type of the Ohnaruto Bridge is a 3-span 2-hinged stiffening truss suspension bridge. The span also includes space reserved for installation of the Shinkansen railroad track bed.

Since the Ohnaruto Bridge is located in the Seto Inland Sea National Park, much consideration was given to maintaining harmony with the natural environment in terms of foundation arrangement, bridge shape and color.

Construction work on the bridge project commenced in July, 1976 and was finished in June, 1985.

### Wind Resistant Design

The basic wind speed (50 m/sec) which is a recurrent expectation over 150 years in terms of a mean speed during 10 minutes at 10 meters above the surface of the earth or the sea was determined statistically on the basis of available meteorological data at the bridge site. Wind speed varies vertically and horizontally, so the design wind speed is derived from basic wind speed with consideration of elevation of bridge members and length of the bridge. For example, the design wind speed for the stiffening truss is 73 m/sec.

Structural dimensions of the stiffening truss are determined after they are confirmed to guarantee the aerodynamic stability against the design wind speed by the means of a wind tunnel test.



*View of the Ohnaruto Bridge*

### Earthquake Resistant Design

The earthquake to be considered in designing the bridge is as high as 8 in magnitude which is expected statistically to occur once or twice in 100 years off the Pacific coast at a distance of 150 km from the site.

The earthquake-resistant design criteria for this project require the modified seismic coefficient method or the dynamic analysis by the response spectra to check the stress or the deformation of a foundation assuming that the horizontal acceleration on the bearing bedrock is 180 gal (0.18 g).

### Fatigue Design


Main members of the Ohnaruto Bridge are made of high-tensile strength steel in order to reduce dead load. Consequently, fatigue design is one of important problems.

Thus, the Authority has carried out large scale fatigue tests to refine fatigue design. Through these studies new S-N curves were proposed for various joints of high-tensile strength steel.

### Substructure


The anchorage is a gravitational foundation sustaining a horizontal force of about 2500 ton.f through the cable anchor frames buried in the concrete. The anchorages were placed on the bedrock after reclaiming the shore line and excavating reclaimed land to the bedrock.

For the tower piers, the multi-columns foundation system was applied. After the hole of the column was drilled by a drilling machine of 4.4 m diameter, steel casing of 7 or 4 m diameter was installed in each hole. The inside of the casings was dried up and filled with concrete.

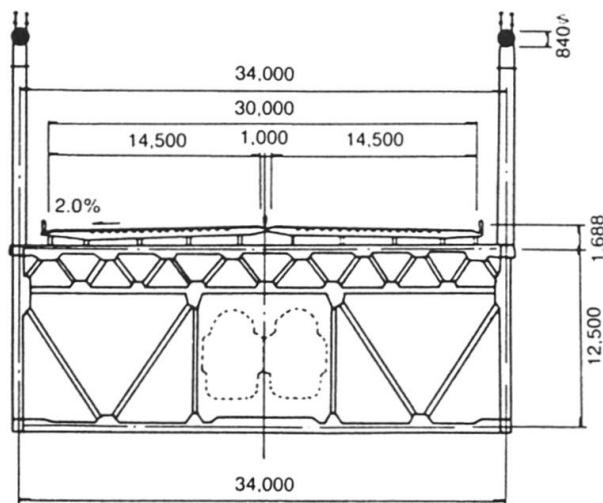

Stiffening Truss Cross-section

(M. Ohashi)

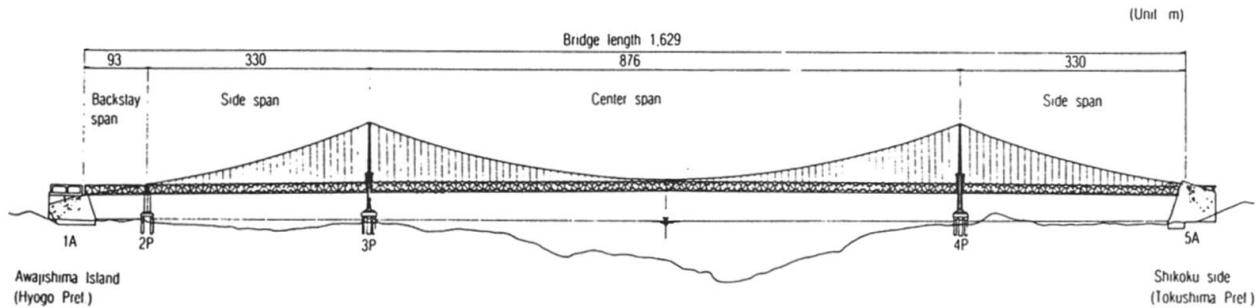

Profile of Ohnaruto Bridge