

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 10 (1986)  
**Heft:** C-36: Structures in Japan

**Artikel:** Kahei spiral ramp, Tokyo  
**Autor:** Komura, T.  
**DOI:** <https://doi.org/10.5169/seals-19856>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 24.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## 9. Kahei Spiral Ramp, Tokyo

<b>Owner:</b>	Metropolitan Expressway Public Corporation (MEPC)
<b>Engineer:</b>	MEPC
<b>Contractor:</b>	Taisei Corporation Shinnihon Doboku Co., Ltd. JDC Corporation Totesu Kogyo Co., Ltd.
<b>Dimensions:</b>	
Diameter of outer edge:	100 m
Diameter of inner edge:	75 m
Maximum grade:	7%
<b>Quantities of materials:</b>	
Foundation pile:	447
Concrete	pile: 40800 m <sup>3</sup> footing: 15700 m <sup>3</sup> wall, column and slab: 29400 m <sup>3</sup>
Reinforcing bar	pile: 2280 t footing: 980 t wall, column and slab: 3430 t
<b>Construction Period:</b>	50 months
<b>Service date:</b>	1985

### Introduction

A pair of spiral-shaped ramp ways called Kahei Ramp has been constructed to connect the arterial Ring Road No. 7 and Metropolitan Expressway No. 6 which runs from Tokyo to the northern district.

This type of a ramp was planned and designed so as to enable the access of all directions with left turn only and to minimize the area of land for the expressway.

The ramp structure was constructed using cast-in-situ concrete.

### Design

Since the type of ramp is very special involving a spiral shape, some structural types were studied such as steel girder, reinforced concrete and suspension structure. As a result the reinforced concrete type was adopted for the slab, and wall in combination with footing. This type was superior from the aseismic point of view, had less influence due to noise and vibration on the environment, and was more amenable to aesthetic treatment.

As is shown in the figure, there are two kinds of structural section: single deck and double deck. In the single deck section the slab is supported by two continuous walls, while in the double deck part the slab is supported by one continuous wall and two rows of columns.



Fig. 1 Kahei Ramp

By regarding the structure as an assemblage of plane rigid frames, structural analysis was carried out in the design of the frame.

Various loading conditions such as L loading (line load) and distributed loading, T loading (concentrated loads by 20 t truck) were used for the structural design to investigate the distribution area.

### Construction

The structure was completed in the order of the construction of foundation pile, footing, wall, column and slab divided into several blocks.

Reverse circulation drill piling was used for foundation piles with  $\phi = 1.5$  m and  $L = 50$  m. In the single deck section, a row of piles was aligned below each wall, and in the double deck section six rows of piles were arranged under the footing. Concrete for the footing and slab was cast at one time in each block. On the other hand, concrete for the wall and column was cast in several steps depending on their height. Though the

whole structure is continuous it is not possible to cast concrete at the same time as mentioned above.

Therefore it is unavoidable to generate many cold joints in the structure, and there is a possibility of occurrence of initial cracking by thermal stress near cold joints. To prevent the occurrence and development of cracks by repeated live load, prestressing force was applied by two steps: about 60% of design force at the third day and 100% at the seventh day.

To harmonize with the surroundings and to provide a good aesthetic appearance some ornamental treatments have been done. A crushed block texture was adopted on the surface of the wall and the lower surface of the slab by using urethane rubber form. Several concave stripes were put on the surface of the columns vertically to emphasize the vertical direction. There are many curved surfaces on the structure and special consideration was also given to the appearance of toll gate.

(T. Komura)

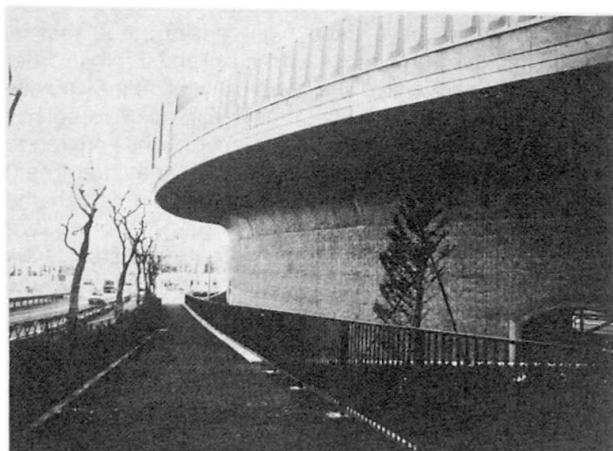


Fig. 2 Exterior view of Kahei Ramp

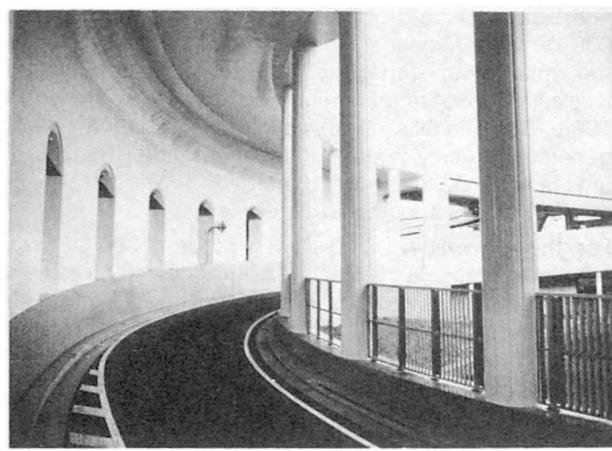


Fig. 3 Interior view of Kahei Ramp

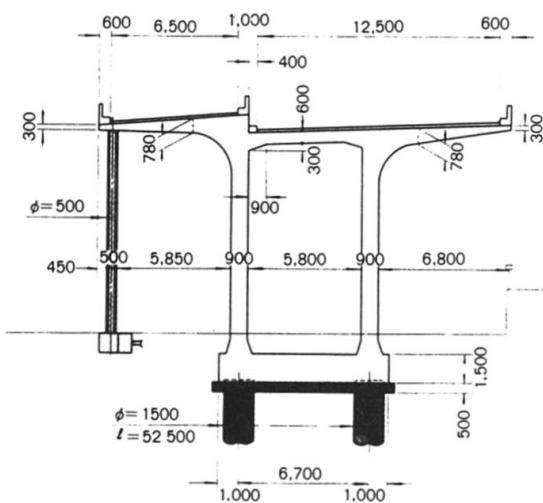


Fig. 4 Single deck section

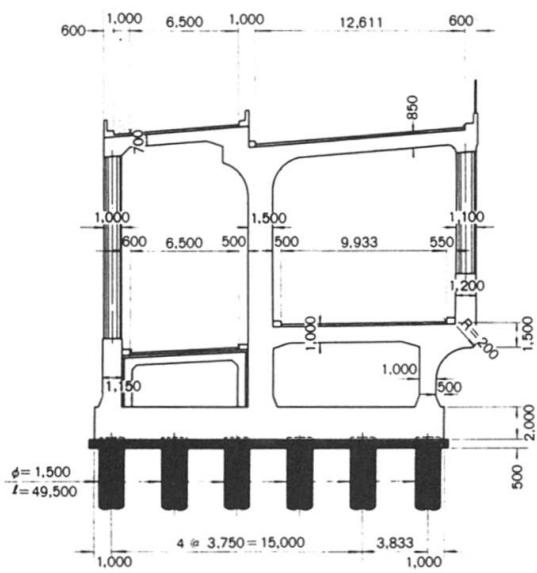


Fig. 5 Double deck section