Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 10 (1986)
Heft: C-39: Energy-conservative buildings in warm climates

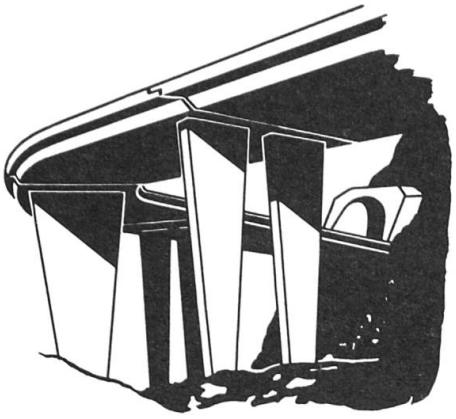

Belags-Sickerwasser-Ableiter
Subsurface Seepage.
Evacuations des eaux et aérations.
Ductos de agua de filtración para calzadas.



Fahrbahn-Übergangs-Konstruktionen.
Expansion joints.
Raccordements de chausées
Sistemas de juntas de dilatación.

HONEL®
ENGINEERING DEVELOPMENT
SYSTEM



Entwässerungs-Systeme
Surface drainage
Evacuations des eaux
Pozos de drenaje



Hohlraumschalungen
Einstiegsluken + Türen
Formwork + Moulds
Access openings
Ouvertures d'entrée
Aberturas de entrada

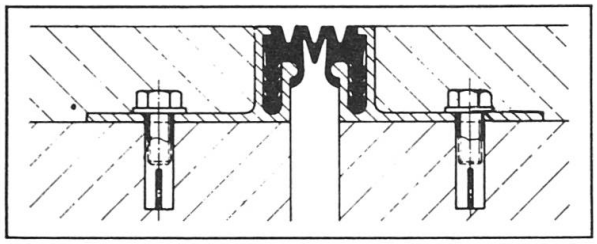

Fugendichtungen im Hoch- + Tiefbau
Joint seals + Joint profilés
Sellos para juntas

Auflager
Structural Bearings
Appuis
Apoyos



Pressen + Pumpen
Hydraulic jacks
Verins + Pompes
Prensas + bombas

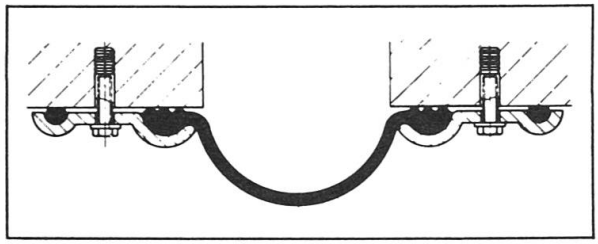

HONEL®

heinz honegger ag

CH-8427 Rorbas ZH Switzerland
Tel. 01 - 865 11 77, Telex 52844

Vertretungs- und Lizenzvergabe:
Honel-Holding SA
Sonnmattstrasse 6
CH-8180 Bülach, Switzerland
Phone 01/860 89 43

Yet it does move...

The surveyor behind Kern's new ME 5000 Mekometer has every right to remember Galileo Galilei's historic words. Dams, for example – as monumentally as they may seem to be implanted in their surroundings – do move. Normally by negligible amounts, but sometimes dramatically.

You can detect shifts to fractions of a millimetre with a Kern ME 5000 precision distance meter. And you get results with the dependability and reliability needed to monitor structures of such magnitude. The new Mekometer conducts measurements completely automatic without an operator's intervention during the measuring cycle. It has a range of up to 8 km.

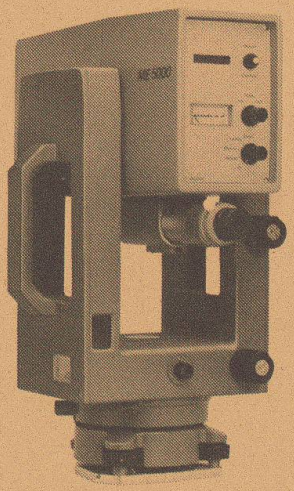

The remarkable accuracy of this instrument – ± (0.2 mm + 0.2 mm/km) – is based on the use of a helium-neon-laser beam and one single crystal for modulation and demodulation. At distances exceeding 200 m, the Mekometer, an 11 kg featherweight, easily outperforms one-second theodolites in point surveys.

An RS 232 communications interface makes it possible to record measurements on external media and remotely control the instrument.

Yet it does move: a statement that made history. The ME 5000: a precision distance meter that will make history.

We measure up Kern SWISS

Kern & Co. Ltd.
Mechanical, Optical and Electronic
Precision Instruments
CH-5001 Aarau, Switzerland
Telephone 064 25 11 11

Please send me:

☐ *Information on the complete Kern program.*

☐ *Information on the Kern Mekometer 5000.*

Name: _____

Company: _____

Address: _____ *City:* _____

1

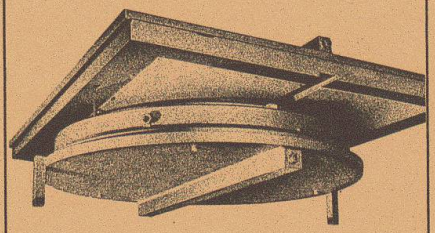

2

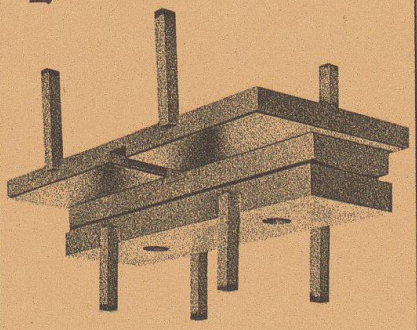

RESTON

LASTO

3

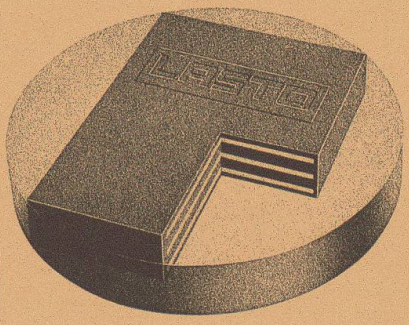

4

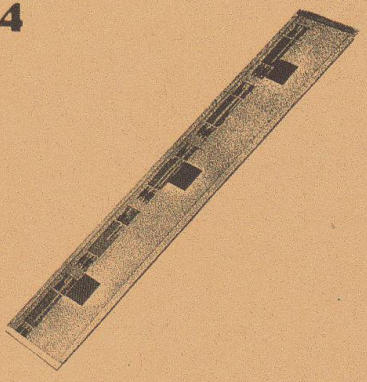

5

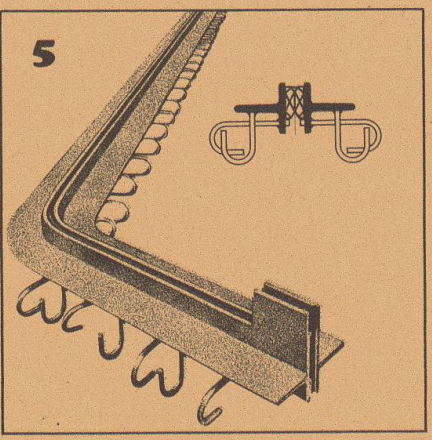

TENSA

6

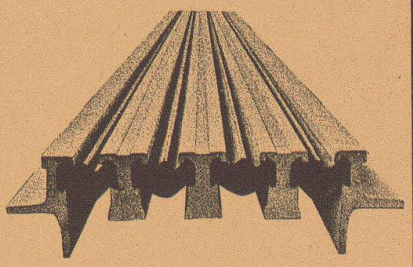

1

RESTON Pot Sliding Bearings
are highly suitable for installation in bridge structures. They feature a low-profile design, low weight and high loading capacity.

2

RESTON Linear Tilting and Sliding Bearings
are a combination of normal linear tilting bearings and PTFE sliding bearings and are suitable for installation in bridge structures.

3

LASTO-BLOCK Bearings
are suitable for building, civil engineering and bridge construction applications. Their simple form allows easy installation.

4

LASTO-STRIP Bearings for Buildings
were especially developed for building constructions. They are particularly suitable for movement compensation between concrete slabs and load-supporting walls and prevent structural cracking.

5

TENSA-ACME Roadway Construction Joints
are highly suitable for installation in traffic levels (parking lots, bridges, airport areas etc.). Dilatation up to 60 mm.

6

TENSA-LASTIC Roadway Construction Joints
meet all the requirements that can be made in bridge engineering of a modern joint design. They are rugged and watertight. Dilatation range 60 mm and bigger.

PROCEQ SA
Riesbachstrasse 57
CH-8034 Zurich

proceq

Phone: 01/47 78 00
Telex 53357 proce ch