

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 11 (1987)  
**Heft:** C-42: Recent structures

**Artikel:** Television tower in the city of Tashkent (USSR)  
**Autor:** Morozov, E.P. / Semashko, Y.L.  
**DOI:** <https://doi.org/10.5169/seals-20380>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 08.07.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## 1. Television Tower in the City of Tashkent (USSR)

The chief architect of the tower was Yu. L. Semashko, the chief designer – E. P. Morozov, the chief engineer of the project – M. D. Musheev.

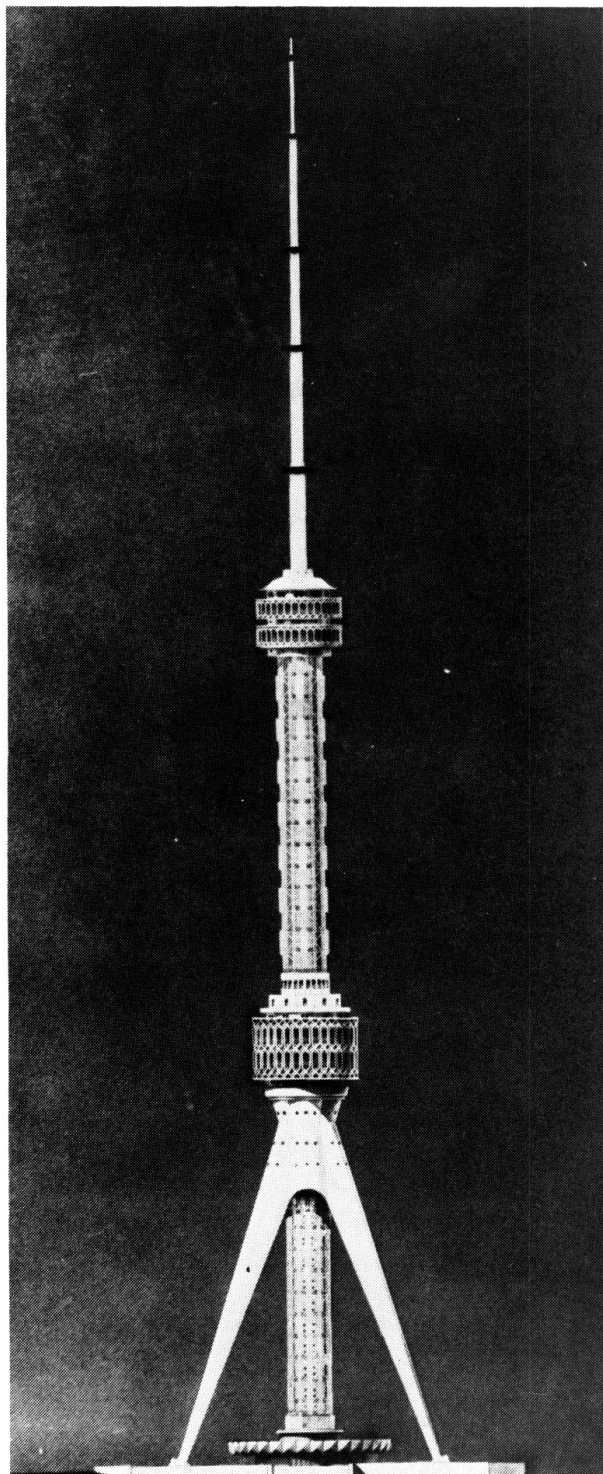


Fig. 1 Façade of the radiotelevision and shaft erection

In 1983 the steel tower of a new Tashkent Television Centre rose to height of 375 m. The engineering solution to the problems concerning the construction of the tower made it possible to realize in metal the architectural composition of latticed and solid-web forms. The tower combines three integral constructive parts: tripod, latticed framework and central shaft.

The tripod consists of three cone struts integrated into a single rosette at the top, and at the bottom they rest on their separate foundations. The latticed framework with a height of 220 m is installed on the central foundation and passes through the rosette of the tripod. The rosette is connected with the corresponding ring of the framework by radial hinged links.

The central shaft is installed inside the latticed framework, embedded in it at a height of 147 m and connected with it on several levels by lateral bracings. The shaft passes into a 150-m spire of the antenna. The spire is crowned with the flag pole having a weathercock body. The shaft and the tripod are made of steel plates. The framework is made of steel pipes.

The constructive parts of the tower, which are placed inside each other and interconnected, guarantee a higher storage of elastic energy for the construction. The lateral bracings, ensuring the combined work of constructions under the wind and seismic effects, at the same time do not prevent any mutual vertical temperature translocations of the latticed and solid-web parts in case they are differentially heated by the sun. The above-given characteristics are really important for a construction site with high seismic and solar activities.

The ring-shaped multi-storeyed engineering and civil compartments are fastened to the framework at heights of 100 and 200 m. The compartments are framed with aluminium-made casements, balconies, sunshade enclosures. The civil compartments comprise the observation platforms and bars with rotating floors. The bars' interiors are decorated with marble, coloured glass and other decorative materials. Access to the compartments is provided by means of fast lifts.

The stylobate of the tower simulates the ground technical building. The foundations of this building comprise reinforced concrete bands connecting the plates of foundations of the tower.

The erection of the tower was carried out by means of different methods: the use of a vertical crane resting on the tower (framework), a self-lifting crane (spire), winches with tackled blocks (struts of the tripod). The construction of the tower took five years. The mass of the steel constructions is 59 000 ton.

The tower was designed in Moscow and Tashkent; construction at the plants of the Urals and Uzbekistan; the tower was erected by the assemblers who came from Novosibirsk, Leningrad and Tashkent. The tower has become a symbol of friendship of the peoples of the USSR.

(E. P. Morozov, Y. L. Semashko)

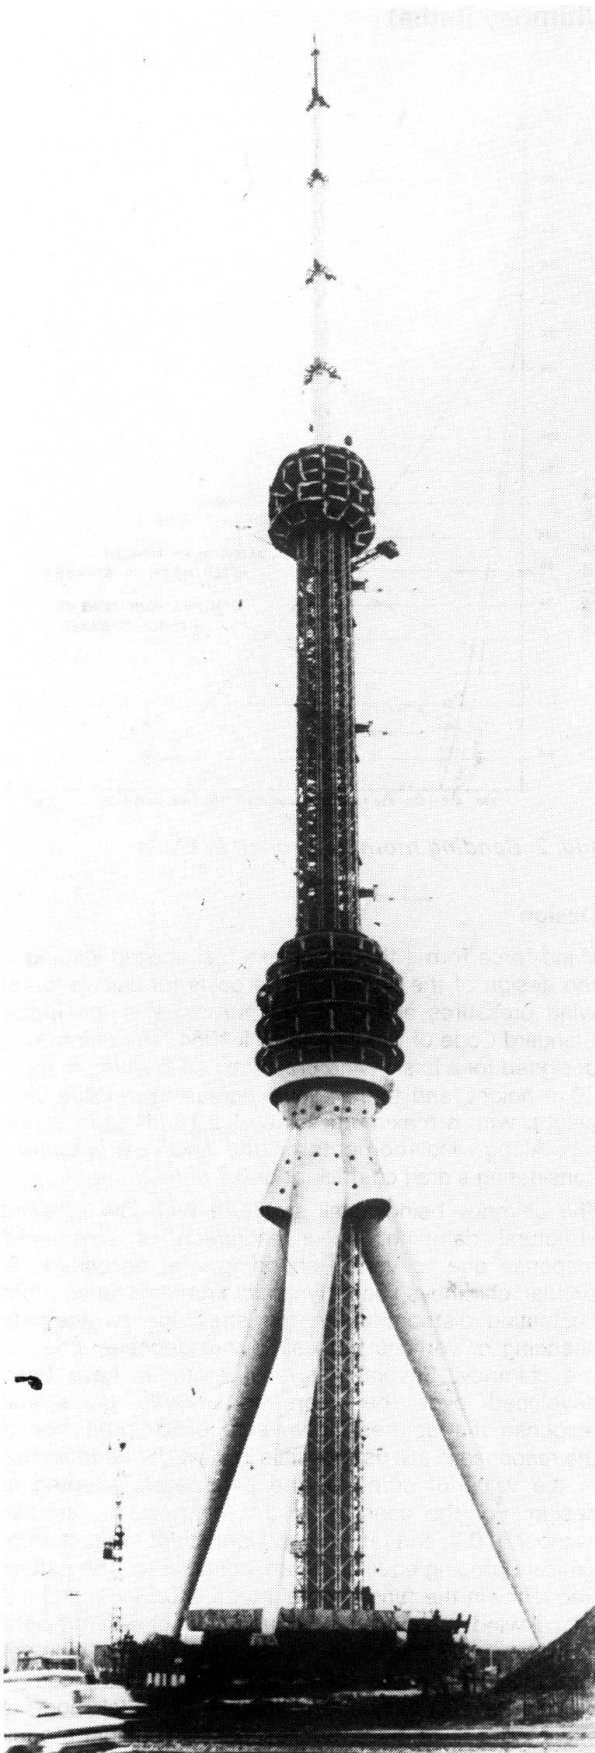


Fig. 2 Beginning of the finishing works in the tower

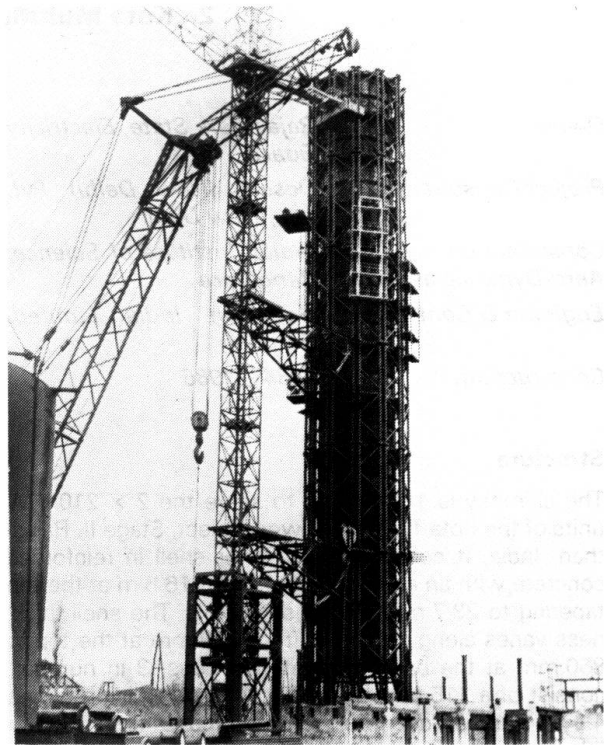


Fig. 3 Beginning of the metal tower erection

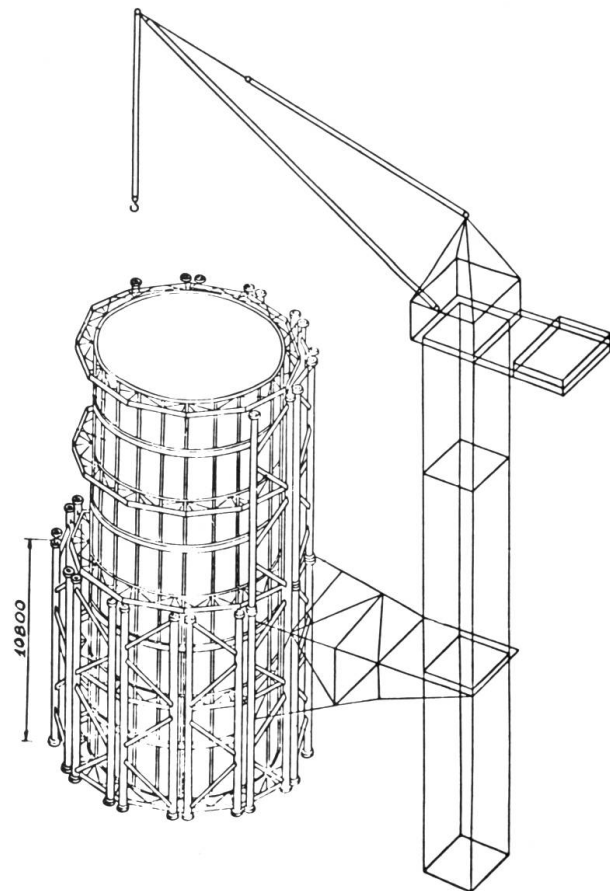


Fig. 4 The tower latticed framework and shaft erection