

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 11 (1987)
Heft: C-41: Tensostructures

Artikel: Fair-ground roof, Milano (Italy)
Autor: Majowiecki, M.
DOI: <https://doi.org/10.5169/seals-20374>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 20.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



5. Fair-Ground Roof, Milano (Italy)

Owner: Ente Auton. per le Fiere di Milano
Architects: Studio Tecnico Majowiecki & Assoc.; Arch. Dept. Plasteco Milano
Structural Engineers: Studio Tecnico Majowiecki & Associates; Ing. L. Antonietti
General Contractor: Canobbio S.p.A., Milano
Cable Structure: Redaelli Tecna S.p.A., Milano
Steel Structure: Nuova Italsider, Genova; CO.ME.F. S.r.l., Milano
Total Floor Area: 6000 m²
Construction Period: January – April 1986

Introduction

On the occasion of the main fair manifestation called April's Fair, the International Fair of Milano decided, in 1986, to cover the main square (Piazza Italia).

The design hypothesis required that the following objectives be aimed at

- absence of internal supports;
- convertibility;
- impressive light architectural image;
- translucent covering material;
- easy and fast execution and erection.

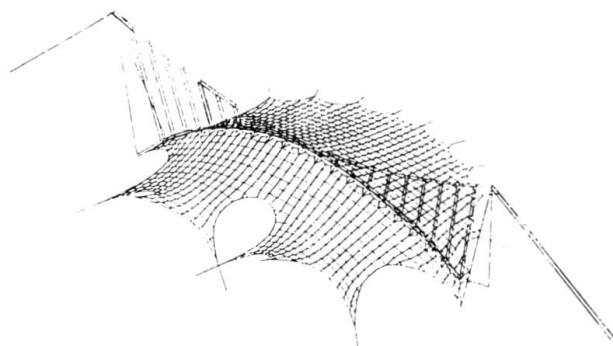


Fig. 1 Interactive graphic design

The covering remains in place from springtime to autumn and is dismantled during wintertime.

Several new open-air exhibitions and shows will be possible with this light, versatile, impressive and low-cost tension-membrane construction.

The building site was opened in January and finished in the beginning of April 1986.

Outline of the Structural System

The main system, oriented along the principal axis of the roof surface, is formed of a pre-stressed cable-truss which has a span of 125 m.



Fig. 2 Aerial view of the construction

The upper carrying rope has a sag of 13 m. It is made of four spiral zinc-coated (class B) cables of 42 mm diameter, construction 127 wires of 3.2 mm with 1600 N/mm^2 breaking strength. The lower stabilizing rope, with the same cable data, is anchored directly in the ground with a span of 105 m and a sag of 23 m. The upper and lower cables are diagonally connected with 2+2 12 mm spiral strands, through special friction steel cable fittings.

The anchorage system is realized with a tripod that consists of two V-shaped steel columns and an external back-stay obtained with the same carrying rope. The columns are 900 mm diameter and 12 mm thickness made with FE 510 B steel grade.

At the top there is a saddle with a ratio between saddle radius to strand diameter of 20. At the bottom of the columns, spherical hinges are placed in order to facilitate erection and permit in-service rotations.

Foundation systems were obtained with high diameter piles. The membrane, realized with polyester coated with P.V.C., has been designed in order to satisfy border conditions and an initial pre-stressing condition.

(M. Majowiecki)

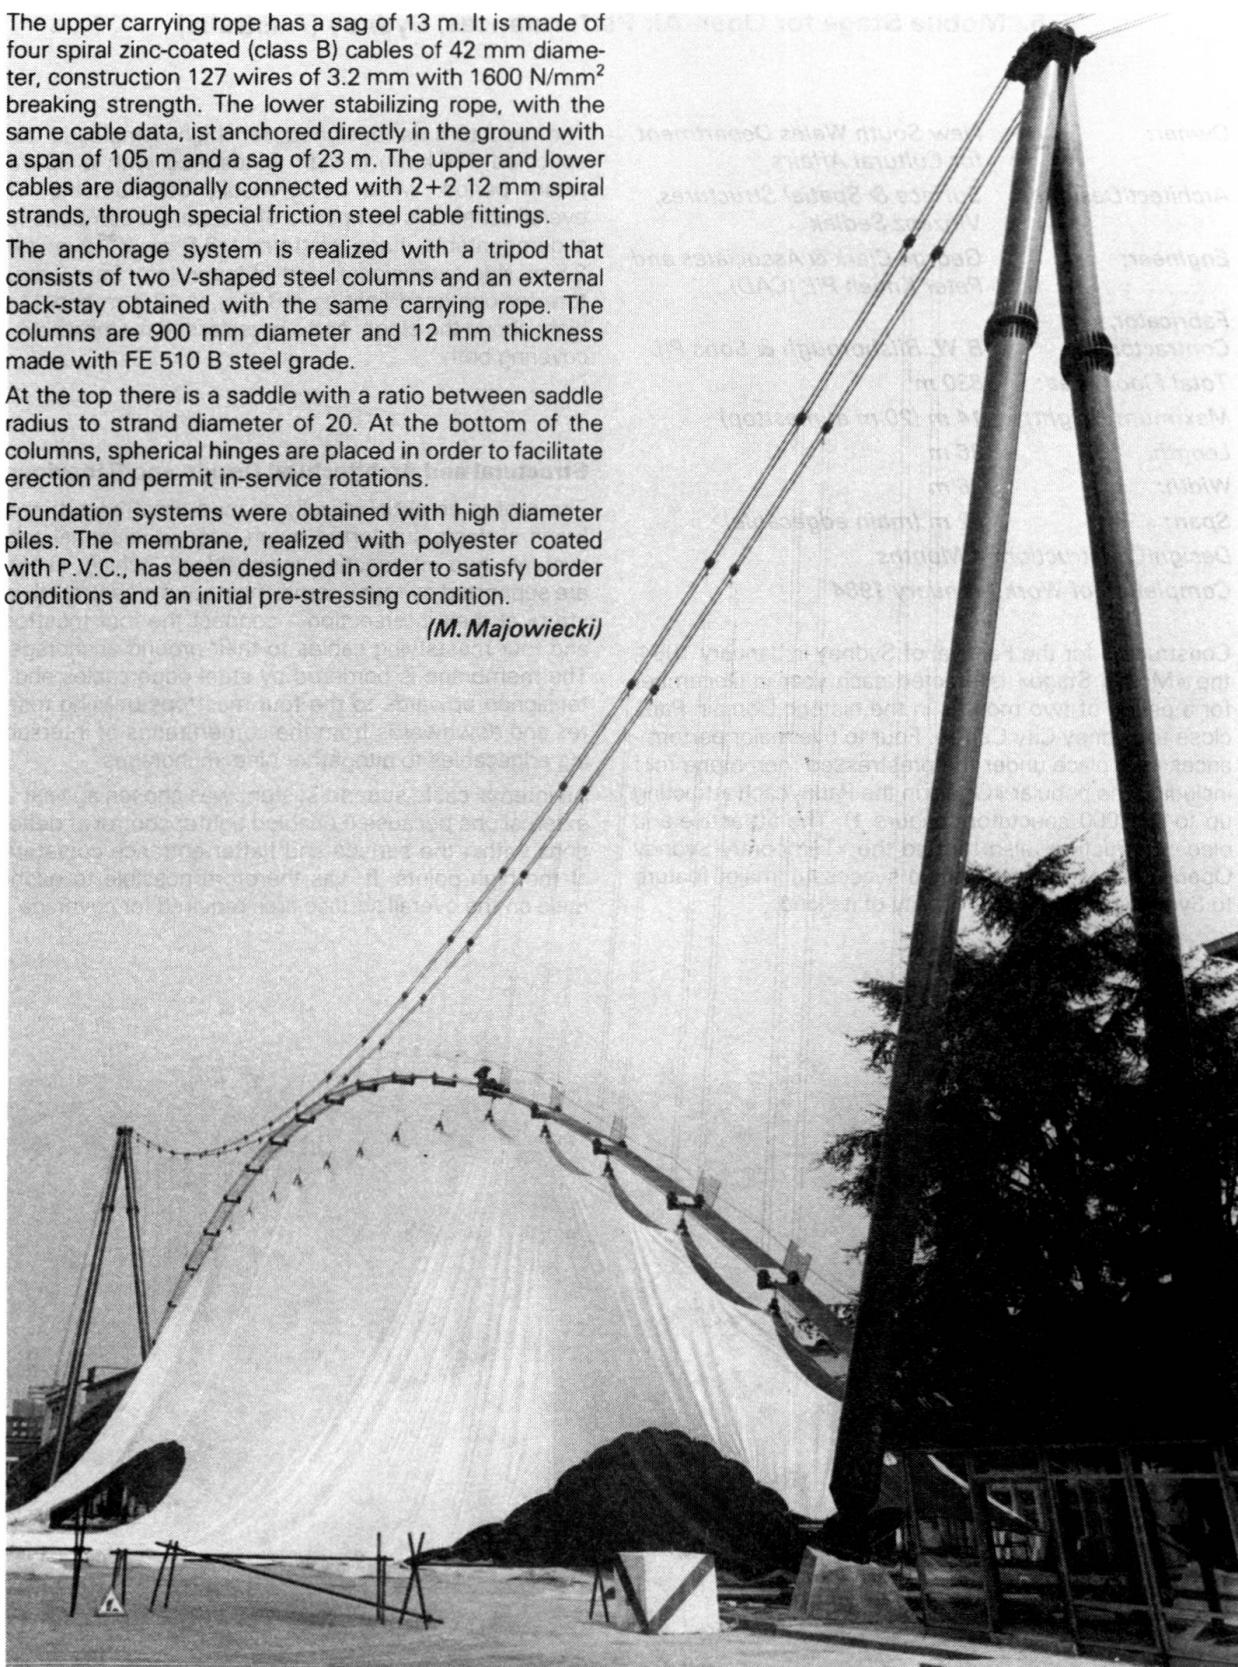


Fig. 3 Main rope truss and membrane during erection