

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 13 (1989)
Heft: C-48: Structures in Portugal

Artikel: Arade Bridge, Portimão (Portugal)
Autor: Rito, A.
DOI: <https://doi.org/10.5169/seals-21553>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 17.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



2. Arade Bridge, Portimão (Portugal)

Owner: Junta Autónoma de Estradas
(Highway State Administration)

Designers: Armando Rito

Contractor: Conduril SARL

Works duration: 36 months

Service date: 1991

General

The Arade bridge is located on the E.N. 125, a coastal road in the Algarve. The road crosses the river Arade 1 km North of the seaside city of Portimão. Future dredging operations will cause the river to move forcing the project to contemplate existing and future riverbeds. The resulting structure is reasonably long. The soil has a low load capacity being characterized by alluvionar deposits of loamy sand and clay about 40 m deep, over a bedrock constituted by a shale formation with basaltic intercalations. The area has a considerable seismic activity corresponding to the worst seismic zone in Portugal.

Description

The bridge is a full suspension cable stayed bridge with fan shaped stays. The approaching viaducts have multiple 30 m spans and a 24 m span near each abutment. There are 8 spans on the East side and 5 spans on the West side. The viaduct piers have an elliptical shape and are founded in piles. The main span is 256 m long with two side spans of 107 m each. Together with the approaching viaducts they form a continuous structure 842 m long. The two concrete towers have an inverted Y shape specifically designed to withstand the seismic forces and also to be aesthetically pleasing. The foundation is made of piles approximately 45 m long. The bridge deck is a prestressed concrete two-cell box girder 17 m wide with the two cells connected transversely by prestressed transverse beams 4 m spaced. The stays are arranged in two planes forming with the deck a tridimensional system which provides the necessary torsional stiffness. The cables are made of parallel strands running over saddles in the upper part of the towers and being anchored to the deck. The anchorages are 8 m spaced except for the last four backstay cables.

Construction

The entire structure is cast in place. The viaducts are constructed span by span with a self-launching form carrier running below the superstructure and supported by the viaduct piers. The towers are erected using climbing forms in 3 m segments and one of them will need the construction of an artificial island in the riverbed. The deck is built in 4 m sections using cast-in-place segmental construction (cantilever construction). Constructive exterior prestress is used during the construction process to keep the strains in the deck to an acceptable level.

Stability under wind and seismic actions

The dynamic analysis showed that the structure responds very well to severe seismic actions with the deck having maximum displacements inferior to 44, 14 and 19 cm respectively in the transversal, longitudinal and vertical directions. The fundamental vibration modes of the bridge – transversal, longitudinal, vertical and torsional – have frequencies of 0.14, 0.16, 0.37 and 1.03 Hz, respectively. The deck cross-section was found to be aerodynamically stable to winds with speed of up to 240 km/h.

(A. Rito)

Quantities of Materials

Concrete

Foundations	8000 m ³
Towers and piers	2800 m ³
Deck	8800 m ³

Prestressing steel

Bar tendons	125 ton
Strand (deck)	190 ton
Strand (stays)	290 ton

Mild steel

Foundations	300 ton
Deck, towers and piles	1400 ton

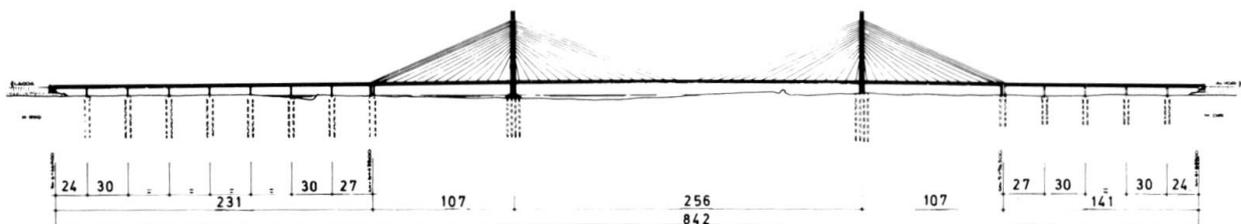


Fig. 1 Side elevation

